

Electrophoresis solutions for the Life Scientist

2018







Since 2005, both multiSUB horizontal and omniPAGE vertical gel chambers have been the cornerstone of the Cleaver Scientific EZEE electrophoresis range. Over this time, the entire range has gained an enviable reputation for innovation, ease of use, strength and long life. Nowadays, EZEE gel chambers can be found in leading research and teaching laboratories in hospitals.



A complete range of Gel Electrophoresis systems and accessories from gel preparation to documentation and analysis. UK designed and manufactured for unrivalled quality.



CNC & laser cutting for precision manufacturing and assembly



Custom & bespoke product development and fabrication



Hand finished assembly ensures the highest quality



UK designed and manufactured

All Cleaver Scientific products, including the flagship gel electrophoresis systems, are supplied directly from its manufacturing facility in Rugby, based in the heart of the United Kingdom.

With the objective of simplifying the life of Life Science researchers, each product is the result of the combined creativity, technical and engineering expertise acquired over many years by the company's in-house manufacturing and scientific product development team. Cleaver Scientific prides itself on exceptional quality of its products offered at affordable prices.

Quality may be a much misused word, but at Cleaver Scientific it defines what we do, by the timely manufacture and supply of products to our customers that not only fulfil their purpose, but will remain durable and free of imperfections for many years to come. Accreditation to ISO9001/2015 quality management system and adherence to this standard ensures that these principles are met consistently. Safety is of paramount importance and all the products we supply are CE compliant.





Product Focus



Workhorse electrophoresis systems with extreme reliability and life-span for every Life Science lab

SAFE series

Our Safe series of products focuses on improving lab safety by removing potential dangers such as Ethidium Bromide and UV light from the lab. Using safe Blue light and non-carcinogenic stains, research safety is enhanced without sacrificing results.

Power supplies

A wide range of voltage and current capabilities for a variety of applications.









Cleaver Scientific's multiSUB horizontal gel electrophoresis units have been designed by scientists with the laboratory environment in mind

multiSUB Horizontal Electrophoresis tanks provide an easy to use and flexible platform for all your horizontal electrophoresis requirements. With a wide range of tank and tray sizes as well as many comb options, these systems can handle all manner of electrophoresis experiments.

High quality injection moulded construction and durable leakproof design for complete safety and long life.

Electrical safety – lid removal immediately disconnects power to the lower buffer chamber to allow entirely safe access to the gel.

Easy-click lid removal – asymmetric lid design and thumb locators on colour-coded cassette-style electrodes ensure that electrophoresis is always performed in the correct polar direction – i.e. negative to positive.

TANK AND LID DESIGN




'Plug-and-Go' casting – moulded casting dams clip easily onto the ends of the gel tray for rapid external casting, allowing the multiSUB™ unit to remain in use for gel running. Casting is as simple as 1, 2, 3... place one dam onto the lab bench facing upwards and insert the tray into the groove in the dam (1) and repeat with the second dam at the other end (2). The tray is now sealed and may be placed on flat bench space or gel levelling table in readiness for leak proof gel-casting (3).

The widest range of combs available of any gel tank manufacturer - fit virtually every application from preparatory electrophoresis to high-throughput screening.

Available in **four thicknesses** and **colour-coded**. Range from:

- White 1mm supplied as standard
- Black 0.75mm for tightly resolved bands
- Red 1.5mm to maximise sample volume
- Blue 2mm to maximise sample volume

Black and white combs recommended for high resolution gels and publication quality data; red and blue to scale-up nucleic acid volumes for preparatory techniques.





Flexicasters – allow agarose gels of different lengths to be cast in one unit. All models feature adjustable barriers with ultra-soft silicone gasket to ensure leak-proof casting.

Gel levelling table – recommended especially for MSMAXI or MSSCREEN gel trays. Adjustable levelling feet used in conjunction with a levelling bubble provide an even surface upon which to pour wide- and large format gels, to ensure consistent and uniform migration

Multiple gel tray options – eliminate the need for additional gel tanks and allow gels to be cast externally,keeping the tank permanently in use for electrophoresis if required.

UV and blue light transparent above 300nm.





Cassette-style electrodes – difficult to break, but inexpensive and easy to change – composed of 99.99% corrosion-resistant, pure platinum.

Power cables – with 4mm connectors compatible with most modern low-to-medium voltage power supplies; CE compliant (1). Adaptors available for complete power supply compatibility.

Buffer Saver Blocks – conserve buffer for added economy – especially beneficial in larger format MSMAXI and MSSCREEN units (2).

Horizontal Gel Systems SELECTION GUIDE









	MSMINI	MSMIDI	MSCHOICE	MSCHOICEST
	For quick sample checks, following restriction digestion or PCR. MSMINI an economical choice for separation of up to 64 samples.	The same run lengths as the MSMINI but with up to 100 samples.	The perfect system for routine agarose electrophoresis. Up to 210 samples with multichannel compatible comb options for faster loading.	The perfect system for routine agarose electrophoresis. Up to 210 samples with multichannel compatible comb options for faster loading.
Unit Dimensions (w x l x h)	9 x 21 x 9cm	12.5 x 22 x 9cm	17.5 x 26.5 x 9cm	17.5 x 41 x 9cm
Active Gel Size (w x l) / Corresponding Gel Tray	7x7cm / MS7-UV7 7x10cm / MS7-UV10	10x7cm / MS10-UV7 10x10cm / MS10-UV10	15x7cm / MS15-UV7 15x10cm / MS15-UV10 15x15cm / MS15-UV15	15x20cm / MS15- UVST20 15x25cm / MS15- UVST25
Sample Capacity	1-32 (7x7cm) a 1-64 (7x10cm) b 1-50 (10x7cm) a	1-100 (10x10cm) b 1-70 (15x7cm) a 1-140 (15x10cm) b	1-210 (15x15cm) c 1-280 (15x20cm) † 1-350 (15x25cm) ††	
Tank Buffer Volume	225ml	300ml	500ml	1000ml
Combs available; Thickness No. of Teeth	0.75, 1.0, 1.5, 2.0mm 1, 2, 4, 8MC, 8, 10, 12MC, 16	0.75, 1.0, 1.5, 2.0mm 1, 2, 4, 8, 10MC, 12, 16, 20MC, 25	0.75, 1.0, 1.5, 2.0mm 1, 2, 4, 10, 10MC, 12, 14MC, 16MC, 18MC, 20, 28MC, 30MC, 35	0.75, 1.0, 1.5, 2.0mm 1, 2, 4, 10, 10MC, 12, 14MC, 16MC, 18MC, 20, 28MC, 30MC, 35
Buffer Recirculation	No	No	Recommended for high volta runs. Requires modified lid wit Available on request as p	ch 2 buffer recirculation ports.
			MS15LID-BP	MS15STLID-BP
Plug-and-Go Casting Dams Supplied	Yes, 1 pair	Yes, 1 pair	Yes, 1 pair	Yes, 1 pair
Flexicaster Options & Tray Capacity	MS7/10-FC: 1 tray MS15/20-FC: 2 trays* MS26-FC: 3 trays*	MS7/10-FC: 1 tray MS15/20-FC: 1 tray MS26-FC: 3 trays*	MS15/20-FC: 1 tray MS26-FC: 1 tray MS15/20-FC: 1 tray	MS26-FC: up to 3x 7cm trays
Typical Running Conditions	80V, 45-60 minutes	90V, 45-60 minutes	90-150V, 60-90 minutes	100-150V, 60-90 minutes
Bromophenol Blue Migration	~4-5cm/h at 80V	~4-5cm/h at 90V	~4-7cm/h at 90-150V	~4-6cm/h at 100-150V
Ordering Information All Horizontal Gel Tank Models include a Gel Tank, Lid and power cables, sample combs, loading guides and casting dams. (MSMINIONE also includes power supply). Additional accessories are dependent on the catalogue code ordered e.g. MSMINI7 includes the above plus 1x 7x7cm UV Tray.	MSMINI7, 7 x 7cm UV Tray MSMINI10, 7 x 10cm UV Tray MSMINIDUO, 7 x 7cm and 7 x 10cm UV Tray 2 x 8 sample combs, loading guides and casting dams	MSMIDI7, 10 x 7cm UV Tray MSMIDI10, 10 x 10cm UV Tray MSMIDIDUO, 10 x 7cm and 10 x 10cm UV Tray 2 x 16 sample combs, loading guides and casting dams	MSCHOICET, 15 x 7cm UV Tray MSCHOICE10, 15 x 10cm UV Tray MSCHOICE15, 15 x 15cm UV Tray MSCHOICETRIO, 15 x 7cm, 15 x 10cm and 15 x 15cm UV Tray 2 x 20 sample combs, loading guides and casting dams	MSCHOICEST20, 15 x 20cm UV Tray MSCHOICEST25, 15 x 25cm UV Tray 4 x 28 sample combs
	a Assumes 1-2 combs per gel; b Assumes 1-	4 combs per gel; c Assumes 1-6 combs per g	gel; d Assumes 1-9 combs per gel;	

a Assumes 1-2 combs per gel; b Assumes 1-4 combs per gel; c Assumes 1-6 combs per gel; d Assumes 1-9 combs per gel; e Assumes 1-11 combs per gel; f Assumes 1-12 combs per gel * Assumes multiSUB" trays are of the same length (e.g two MS7-UV7) and arranged side-by-side.











MSMAXI	MSSCREEN	miniRAPIDE	MSMIDI96	miniONE
Suitable for RFLP analysis, southern and northern blotting preps and high throughput analysis with up to 550 samples.	Multichannel compatible combs included as standard for maximum efficient with high sample numbers. Screen an entire 96 well plate in a single run with excellent resolution and run length.	An ultra-compact self- contained system for routine molecular biology procedures and quick checks of samples. Buffer and gel volumes kept to a minimum to maximise current and separation speed. UV transparent for direct gel imaging	Rapidly screen a 96 well or PCR plate. Multichannel pipette loading with a 1.8cm run length allows samples to be resolved in under 30 minutes. Stretch version available for extended run length	An all in one power supply and gel tank with 3 preset voltages. Inbuilt timer to stop the run at the desired time and simple casting system for small, economical gels.
23 x 39.5 x 9cm	28 x 50 x 9cm	15 x 15 x 4cm	12.5 x 22 x 9cm (MSMIDI96) 12.5 x 46.5 x 8cm (MSMIDI96ST)	190 x 130 x 55mm
20x10cm / MS20-UV10 20x15cm / MS20-UV15 20x20cm / MS20-UV20 20x25cm / MS20-UV25	26x16cm / MS26-UV16 26x24cm / MS26-UV24 26x32cm / MS26-UV32	10x8cm ∕ in-built tray	10x12cm / MS10-UV96 10x24cm / MS10- UV96ST	10.5 x 6cm 5 x 6cm
1-200 (20x10cm) b 1-350 (20x15cm) c 1-450 (20x20cm) d 1-550 (20x25cm) e	28-336 (26x16cm) c 28-504 (26x24cm) e 28-672 (26x32cm) f	1-40 (10x8cm)	96 samples plus 12 (1 lane) or 24 (2 lanes) marker wells	
1200ml	1400ml	50ml	300ml (MSMIDI96) 700ml (MSMIDI96ST)	230ml
0.75, 1.0, 1.5, 2.0mm 1, 2, 4, 10, 16, 20MC, 25, 30, 36, 40MC, 50 25	0.75, 1.0, 1.5, 2.0mm 28MC, 56MC	1.0, 1.5mm 1, 4, 8, 12, 16, 20	1.0, 1.5mm 8 + 1x Marker, 8 + 2x Markers	
As for MSCHOICE and MSCHOICEST MS20LID-BP	Yes – buffer recirculation ports included as standard	No	No	No
WOZOLID DI	No – supplied with dedicated			
Yes, 1 pair	MSSCREEN flexicaster;	No	Yes	No
MS15/20-FC: 1 tray MS26-FC: 1 tray	MS26-FC: 1 tray	No	Same Flexicasters as MSMIDI	No
100-150V, 60-90 minutes	100-150V, 90-120 minutes	50V, 30-60 minutes	90V, 15-30 minutes	
~4-6.5cm/h at 100-150V	~4-6cm/hr at 100-150V	~4cm/hr at 50V	~4-5cm/h at 90V	
MSMAXI10, 20 x 10cm UV Tray MSMAXI15, 20 x 15cm UV Tray MSMAXI20, 20 x 20cm UV Tray MSMAXI25, 20 x 25cm UV Tray MSMAXIDUO, 20 x 10 and 20 x 20cm UV Tray 2 x 20 sample combs, loading guides and casting dams	MSSCREEN16, 26 x 16cm UV Tray MSSCREEN24, 26 x 24cm UV Tray MSSCREEN32, 26 x 32cm UV Tray MSSCREENTRIO, 26 x 16cm, 26 x 24cm and 26 x 32cm UV Trays 6 x 28 sample combs, loading guides and Flexicaster	FMMS10, 10 x 8cm UV Tray 2 x 8 sample combs 1.5mm and casting dams	MSMIDI96, 1 Marker Lane, 1.8 cm run length MSMIDI96/2M, 2 Marker Lanes, 1.8 cm run length MSMIDI96ST, 1 Marker Lane, 3.6 cm run length MSMIDI96ST/2M, 2 Marker Lanes, 3.6 cm run length Comb block with 12 x 8 sample	MSMINIONE, 2 x 11×6cm UV Trays, 4 x 5.4×6cm UV Trays 2x Full length combs for 11×6cm UV Trays; 2x Double Comb for 5.4×6cm UV Trays, 1x Gel Caster – Large, 1x Gel Caster – Small





multisuB Horizontal Gel Systems

The multiSUB[™] series of Horizontal Gel Units offers the most versatile solution for DNA and RNA agarose gel electrophoresis currently available.


- Injection Moulded Construction
 durable, leak-proof environment for complete safety and long life
- Cassette Type Electrodes
 inexpensive, easy to replace
- Made of 99.99% corrosion resistant, pure platinum
- Electrical Safety lid can be located in one way only. On removal, power is disconnected from buffer chamber
- Multiple Gel Trays eliminate the need for additional gel tanks
- Unique gel cooling system
- Easy Click Lid Removal

All five units offer an unsurpassed combination of economy of gel and buffer volume, with gel size and sample number versatility.

Gel size and sample number requirements can be exactly matched in each unit, with the option of additional gel tray sizes. This eliminates the need for multiple gel tanks for changes in gel size or application.

All units feature removable UV transparent trays. For optimum value and versatility, systems are available with one, two or three tray options (dependent on model). Easy to use, leak proof 'plug and go' gel casting dams are included as standard to allow gels to be rapidly cast whilst the multiSUB unit is in use for gel running. With no indentations or casting gate grooves in the tray to interfere with sample progression, traditional tape casting can be used, should this be preferred.

Although lid connectors are compatible with most major power supplies, adapters are available to provide complete compatibility.

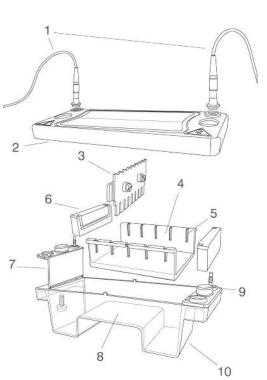

Components of multiSUB gel chambers

- 1 Power Cables
- 2 Safety Lid & Viewing Pane
- 3 Height-adjustable comb
- 4 UV transparent gel tray
- 5 Comb slots
- 6 'Plug-and-Go' casting dams
- 7 Colour-coded electrodes with power plug connectors
- 8 Gel Platform
- 9 Safety lid thumb locators
- 10 Moulded tank





Locate Edge #2 in Dam slot

Edge #1 in Dam slot





· four thicknesses, colour coded

 black:
 0.75mm for ultra resolved bands

 white:
 1mm supplied as standard

 red:
 1.5mm for maximising sample volume

 blue:
 2mm for maximising sample volume

- options for Sample Prep
- options for Multi-Channel Pipette Compatible

The number of samples can be maximised using high tooth number combs



Easy Click Lid Removal

unique clearsight,



USB powered extraction fan

ClearSight lids solve the condensation build-up problem and so provide a perfectly clear view of the gel and the dye lane progression during the run. This is achieved using a USB powered extraction fan within the lid. Clearsight lids are available as components of complete systems or as upgrades.

For Horizontal

Package Deals



Casting dams allow

externally while the multiSUB™ unit is in use for gel running

gels to be rapidly cast

UK designed and manufactured





multiSUB[™] **Mini** is the smallest unit in the range, designed for low to medium numbers of samples.

The small gel size maximises run economy but does not compromise versatility as two tray options are available – **7 x 7cm and 7 x 10cm** – and combs ranging from preparative up to 16 samples. Simply by altering the gel tray or comb, this compact unit is capable of resolving up to 64 different samples, prepping 1ml of sample or separating sample bands over a distance of 9cm. Buffer saver blocks physically reduce the volume of a gel chamber and so reduce buffer requirements, saving cost. For Power Supplies, see page 58.



ORDERING INFORMATION

MS7-10-1

MS7-12MC-1

Comb 10 sample, 1mm thick

Comb 16 sample, 1mm thick

Comb 12 sample MC, 1mm thick



CSL-AG-500 St Approximation of the Post Guarden Agriculture o

Buffer saver blocks

physically reduce the volume of a gel chamber and so reduce buffer requirements, saving cost, see page xx

Molecular Grade Agaroses

are suitable for routine analysis of nucleic acids, see page xx

KEY FEATURES

multiSUB Mini is the preferred option for quick sample checks of small to medium volumes, particularly following restriction digestion during cloning. Its slim tray format makes MSMINI a very economical choice for separation of up to 64 samples.

- Available with 7 x 7cm, 7 x 10cm or with both gel trays
- Economic low gel and buffer volumes
- Small lab bench footprint

	MSMINI7	multiSUB Mini, 7 x 7cm UV Tray, 2 x 8 sample combs, loading guides and dams						
	MSMINI10	multiSUB Mini , 7 x 10cm UV Tray, 2 x 8 sample combs, loading guides and dams						
	MSMINIDUO	multiSUB Mini Duo, 7 x 7cm & 7 x 10cm UV 7	UV Tray, 2 x 8 sample combs, loading guides and dams					
	MS7-UV7	7 x 7cm UV Tray	MS7-LG Adhesive Loading Guides but		buffer			
	MS7-UV10	7 x 10cm UV Tray	MS7-WP Viewing Platform MS7		MS7/10-FC	Flexicaster for multiSUB MSMINI/MSMIDI		
	MS7-PE	Positive Electrode	MS7-UVS	7cm UV (Gel Scoop		MSMINIxCS	ClearSight MINI, as above
	MS7-NE	Negative Electrode	MSMINICP Cool-pack and Platform			with fan & power source where 'x' should be		
	MS7-UVDAM	Casting Dams, pk/2	MSMINIBSB	Buffer Sa	aver Blocks, pk/2, sav	es 100ml of		replaced with '7', '10' or 'DUO'
Colour	CODE	DESCRIPTION	Sample Volum a 5mm thick		Code	Description	ı	Sample Volume for a 5mm thick gel
	MS7-1-0.75	Comb Prep 1, Marker 1, 0.75mm thick	152µl		MS7-1-1.5	Comb Prep 1, Ma	arker 1, 1.5mm thick	304µІ
	MS7-2-0.75	Comb Prep 2, Marker 2, 0.75mm thick	68µІ		MS7-2-1.5	Comb Prep 2, M	arker 2, 1.5mm thick	135µІ
	MS7-4-0.75	Comb Prep 4. Marker 2. 0.75mm thick	0.0 1					
		COITID FTEP 4, Walker 2, 0.73HIIIT UTICK	36µІ		MS7-4-1.5	Comb Prep 4, M	arker 2, 1.5mm thick	72µІ
	MS7-8MC-0.75	Comb 8 sample MC, 0.75mm thick	З6µI 8µI		MS7-4-1.5 MS7-8MC-1.5		arker 2, 1.5mm thick MC, 1.5mm thick	72µl 17µl
	MS7-8MC-0./5 MS7-8-0.75		<u>'</u>				MC, 1.5mm thick	
	MS7-8-0.75 MS7-10-0.75	Comb 8 sample MC, 0.75mm thick Comb 8 sample, 0.75mm thick Comb 10 sample, 0.75mm thick	8µl 19µl 14µl		MS7-8MC-1.5 MS7-8-1.5 MS7-10-1.5	Comb 8 sample Comb 8 sample Comb 10 sample	MC, 1.5mm thick , 1.5mm thick e, 1.5mm thick	17µl 37µl 27µl
	MS7-8-0.75 MS7-10-0.75 MS7-12MC-0.75	Comb 8 sample MC, 0.75mm thick Comb 8 sample, 0.75mm thick	8µl 19µl 14µl 10µl		MS7-8MC-1.5 MS7-8-1.5 MS7-10-1.5 MS7-12MC-1.5	Comb 8 sample Comb 8 sample Comb 10 sample	MC, 1.5mm thick , 1.5mm thick	17µl 37µl 27µl 20µl
	MS7-8-0.75 MS7-10-0.75	Comb 8 sample MC, 0.75mm thick Comb 8 sample, 0.75mm thick Comb 10 sample, 0.75mm thick	8µl 19µl 14µl		MS7-8MC-1.5 MS7-8-1.5 MS7-10-1.5	Comb 8 sample Comb 8 sample Comb 10 sample	MC, 1.5mm thick 1.5mm thick e, 1.5mm thick e MC, 1.5mm thick	17µl 37µl 27µl
	MS7-8-0.75 MS7-10-0.75 MS7-12MC-0.75	Comb 8 sample MC, 0.75mm thick Comb 8 sample, 0.75mm thick Comb 10 sample, 0.75mm thick Comb 12 sample MC, 0.75mm thick	8µl 19µl 14µl 10µl		MS7-8MC-1.5 MS7-8-1.5 MS7-10-1.5 MS7-12MC-1.5	Comb 8 sample Comb 8 sample Comb 10 sample Comb 12 sample Comb 16 sample	MC, 1.5mm thick 1.5mm thick e, 1.5mm thick e MC, 1.5mm thick	17µl 37µl 27µl 20µl
	MS7-8-0.75 MS7-10-0.75 MS7-12MC-0.75 MS7-16-0.75	Comb 8 sample MC, 0.75mm thick Comb 8 sample, 0.75mm thick Comb 10 sample, 0.75mm thick Comb 12 sample MC, 0.75mm thick Comb 16 sample, 0.75mm thick	8µl 19µl 14µl 10µl 7µl		MS7-8MC-1.5 MS7-8-1.5 MS7-10-1.5 MS7-12MC-1.5 MS7-16-1.5	Comb 8 sample Comb 8 sample Comb 10 sample Comb 12 sample Comb 16 sample Comb Prep 1, M	MC, 1.5mm thick ,1.5mm thick e, 1.5mm thick e MC, 1.5mm thick e, 1.5mm thick	17µ1 37µ1 27µ1 20µ1 15µ1
	MS7-8-0.75 MS7-10-0.75 MS7-12MC-0.75 MS7-16-0.75 MS7-1-1	Comb 8 sample MC, 0.75mm thick Comb 8 sample, 0.75mm thick Comb 10 sample, 0.75mm thick Comb 12 sample MC, 0.75mm thick Comb 16 sample, 0.75mm thick Comb Prep 1, Marker 1, 1mm thick	8µl 19µl 14µl 10µl 7µl 203µl		MS7-8MC-1.5 MS7-8-1.5 MS7-10-1.5 MS7-12MC-1.5 MS7-16-1.5	Comb 8 sample Comb 10 sample Comb 10 sample Comb 12 sample Comb 16 sample Comb Prep 1, M. Comb Prep 2, M	MC, 1.5mm thick , 1.5mm thick e, 1.5mm thick MC, 1.5mm thick e, 1.5mm thick e, 1.5mm thick arker 1, 2mm thick	17µl 37µl 27µl 20µl 15µl 405µl
	MS7-8-0.75 MS7-10-0.75 MS7-12MC-0.75 MS7-16-0.75 MS7-1-1 MS7-2-1	Comb 8 sample MC, 0.75mm thick Comb 8 sample, 0.75mm thick Comb 10 sample, 0.75mm thick Comb 12 sample MC, 0.75mm thick Comb 16 sample, 0.75mm thick Comb Prep 1, Marker 1, 1mm thick Comb Prep 2, Marker 2, 1mm thick	8µl 19µl 14µl 10µl 7µl 203µl		MS7-8MC-1.5 MS7-8-1.5 MS7-10-1.5 MS7-12MC-1.5 MS7-16-1.5 MS7-1-2 MS7-2-2	Comb 8 sample Comb 10 sample Comb 10 sample Comb 12 sample Comb 16 sample Comb Prep 1, M. Comb Prep 2, M	MC, 1.5mm thick , 1.5mm thick e, 1.5mm thick e MC, 1.5mm thick e MC, 1.5mm thick a, 1.5mm thick arker 1, 2mm thick arker 2, 2mm thick	17µl 37µl 27µl 20µl 15µl 405µl 180µl

36µl

27µl

20ul

14µl

10ul

MS7-12MC-2

Comb 10 sample, 2mm thick

Comb 16 sample, 2mm thick

Comb 12 sample MC, 2mm thick





With gel tray options of 10 x 7cm and 10 x 10cm, multiSUB[™] Midi has been designed for routine horizontal gel electrophoresis.

Extending only the width of this unit allows more samples to be resolved per gel than multiSUB™ Mini without a significant increase in buffer or gel volumes. A maximum of 100 samples per gel can be resolved making this unit ideal for those routinely checking medium numbers of samples over short to medium gel run lengths. Loading guides allow easy well identification and sample loading. Scoops available as an option allow safe transfer of gels. For Power Supplies, see page 58.





Casting Dams allow gels to be rapidly cast externally while the multiSUB™ unit is in use for gel running, see page xx



Adhesive Loading Guides allow easy well identification and sample loading, see page xx

KEY FEATURES

These units offer the same tray lengths as the multiSUB Mini but in a wider format, to run more samples just as economically under similar running conditions. Ideal for quick checks of samples from PCR and cloning:

- Available with 10 x 7cm, 10 x 10cm or with both gel trays
- Run up to 100 samples
- Low buffer volumes
- Ideal for rapid electrophoresis

ORDERING I	NFORMATION						
MSMIDI7	MSMIDI7 multiSUB Midi, 10 x 7cm UV Tray, 2 x 16 sample combs, loading guides and dams						
MSMIDI10	multiSUB Midi, 10 x 10cm UV Tray, 2 x 16 s.	ample combs, loa	nple combs, loading guides and dams				
MSMIDIDUO	multiSUB Midi Duo, 10 x 7cm & 10 x 10cm	UV Tray, 2 x 16 sa	mple combs, loading guides and dams				
MS10-UV7	10 x 7cm UV Tray	MS10-LG	Adhesive Loading Guides	MSMIDIBSB	Buffer Saver Blocks, pk/2, saves 100ml of buffer		
MS10-UV10	10 x 10cm UV Tray	MS10-WP	Viewing Platform	MSMIDIxCS	ClearSight MIDI, as above with		
MS10-PE	Positive Electrode	MS10-UVS	10cm UV Gel Scoop		Fan & power source where 'x' should		
MS10-NE	Negative Electrode	MS7/10-FC	Flexicaster for multiSUB Mini/Midi		be replaced with '7', '10' or 'DUO'		
MS10-UVDAM	Casting Dams, pk/2	MSMIDICP	Cool-Pack and Platform				


Code Code	DESCRIPTION	Sample Volume for a 5mm thick gel	CODE	DESCRIPTION	Sample Volume for a 5mm thick gel
MS10-1-0.75	Comb Prep 1, Marker 1, 0.75mm thick	270µІ	MS10-1-1.5	Comb Prep 1, Marker 1, 1.5mm thick	540µІ
MS10-2-0.75	Comb Prep 2, Marker 2, 0.75mm thick	118µI	MS10-2-1.5	Comb Prep 2, Marker 2, 1.5mm thick	236µІ
MS10-4-0.75	Comb Prep 4, Marker 2, 0.75mm thick	57μl	MS10-4-1.5	Comb Prep 4, Marker 2, 1.5mm thick	115µІ
MS10-8-0.75	Comb 8 sample, 0.75mm thick	30µІ	MS10-8-1.5	Comb 8 sample, 1.5mm thick	61µІ
MS10-10MC-0.7	5 Comb 10 sample MC, 0.75mm thick	20µІ	MS10-10MC-1.5	Comb 10 sample MC, 1.5mm thick	41µl
MS10-12-0.75	Comb 12 sample, 0.75mm thick	17µІ	MS10-12-1.5	Comb 12 sample, 1.5mm thick	34µІ
MS10-16-0.75	Comb 16 sample, 0.75mm thick	12µІ	MS10-16-1.5	Comb 16 sample, 1.5mm thick	24µl
MS10-20MC-0.7	75 Comb 20 sample MC, 0.75mm thick	10µІ	MS10-20MC-1.5	Comb 20 sample MC, 1.5mm thick	20µІ
MS10-25-0.75	Comb 25 sample, 0.75mm thick	7µІ	MS10-25-1.5	Comb 25 sample, 1.5mm thick	15µl
MS10-1-1	Comb Prep 1, Marker 1, 1mm thick	360µІ	MS10-1-2	Comb Prep 1, Marker 1, 2mm thick	720µІ
MS10-2-1	Comb Prep 2, Marker 2, 1mm thick	158µl	MS10-2-2	Comb Prep 2, Marker 2, 2mm thick	315µІ
MS10-4-1	Comb Prep 4, Marker 2, 1mm thick	77µl	MS10-4-2	Comb Prep 4, Marker 2, 2mm thick	153µІ
MS10-8-1	Comb 8 sample, 1mm thick	41µІ	MS10-8-2	Comb 8 sample, 2mm thick	81µІ
MS10-10MC-1	Comb 10 sample MC, 1mm thick	27µІ	MS10-10MC-2	Comb 10 sample, 2mm thick	54µІ
MS10-12-1	Comb 12 sample, 1mm thick	23µI	MS10-12-2	Comb 12 sample, 2mm thick	45µl
MS10-16-1	Comb 16 sample, 1mm thick	16µІ	MS10-16-2	Comb 16 sample, 2mm thick	32µІ
MS10-20MC-1	Comb 20 sample MC, 1mm thick	14µІ	MS10-20MC-2	Comb 20 sample MC, 2mm thick	27µl
MS10-25-1	Comb 25 sample, 1mm thick atencion. c	lientes@akralab.es · 902	2 22/1 2 75-2· 965	5 116n521amplewwwhiakralab.es	20μΙ





With its three tray options, multiSUB[™] Choice offers a wide degree of versatility.

Three tray options are available – **15 x 7cm, 15 x 10cm** and **15 x 15cm** – allowing the choice of one, two or all three gel length options at the time of purchase. Maximising comb and tray options allow up to 210 samples to be resolved per gel. The 15cm total run length allows restriction fragment or other close MW sample bands to be easily separated and identified. Speed loading is accomplished using 10, 14, 16, 18, 28 or 30 sample multi-channel pipette compatible combs. **multiSUB™ Choice Stretch** units are available with optional **15 x 20cm** and **15 x 25cm** gel trays and four 28-sample combs for those researchers wanting to perform higher resolution separation of more samples over a longer distance. multiSUB™ Choice Trio includes all 3 tray sizes for optimum versatility and value. For Power Supplies, see

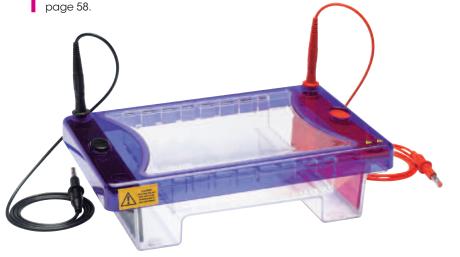



multiSUB Choice Trio includes all 3 tray sizes for optimum versatility and value

multiSUB Choice Stretch

increases sample capacity to 350

KEY FEATURES

multiSUB Choice is ideal for restriction fragment analysis, sample prep or checking of high numbers of samples.

- Three tray options
- Run up to 210 samples
- Low buffer volumes
- Multichannel pipette compatible combs for speed loading

ORDERING	INFORMATION				
MSCHOICE	multiSUB Choice, 15 x 7cm UV Tray, 2 x 20 sa	ample combs	MSCHOICETRIO multiSUB C	Choice Trio, 15 x 7, 1	10 and 15cm UV Tray, 2 x 20 sample combs
MSCHOICE:	10 multiSUB Choice, 15 x 10cm UV Tray, 2 x 20 s	sample combs	MSCHOICEST20 multiSUB 0	Choice Stretch, 15	x 20cm UV Tray, 4 x 28 sample combs
MSCHOICE	5 multiSUB Choice, 15 x 15cm UV Tray, 2 x 20 s	sample combs	MSCHOICEST25 multiSUB C	Choice Stretch, 15	x 25cm UV Tray, 4 x 28 sample combs
MS15-UV7	15 x 7cm UV Tray	MS15-PE	Positive Electrode	MS15/20-FC	Flexicaster for multiSUB Choice / Maxi
MS15-UV10	15 x 10cm UV Tray	MS15-NE	Negative Electrode	MSCHOICEXCS	ClearSight Choice, as above
MS15-UV15	15 x 15cm UV Tray	MS15-LG	Adhesive Loading Guides		with Fan & power source.
MS15-UVST2	20 15 x 20 cm UV Tray	MS15-UVS	15cm UV Gel Scoop		where 'x' should be replaced
MS15-UVST2	25 15 x 25 cm UV Tray	MSCHOICECP	Cool-Pack and Platform		with '7', '10', '15', '20', '25' or 'TRIO'
MS15-UVDA	M Casting Dams, pk/2	MSCHOICEBSB	Buffer Saver Blocks pk/2, saves 190ml of buffer		

Colour	CODE	DESCRIPTION	Sample Volume for a 5mm thick gel	Colour	CODE	DESCRIPTION	Sample Volume for a 5mm thick gel
	MS15-1-0.75	Comb Prep 1, Marker 1, 0.75mm thick	371µl		MS15-1-1.5	Comb Prep 1, Marker 1, 1.5mm thick	743µl
	MS15-2-0.75	Comb Prep 2, Marker 2, 0.75mm thick	169µl		MS15-2-1.5	Comb Prep 2, Marker 2, 1.5mm thick	338µl
	MS15-4-0.75	Comb Prep 4, Marker 2, 0.75mm thick	91µl		MS15-4-1.5	Comb Prep 4, Marker 2, 1.5mm thick	182µl
	MS15-10-0.75	Comb 10 sample, 0.75mm thick	34µІ		MS15-10-1.5	Comb 10 sample, 1.5mm thick	68µІ
	MS15-12-0.75	Comb 12 sample, 0.75mm thick	30µl		MS15-12-1.5	Comb 12 sample, 1.5mm thick	61µl
	MS15-16MC-0.75	Comb 16 sample MC, 0.75mm thick (DuoComb - 17MC on reverse			MS15-16MC-1.5	Comb 16 sample, 1.5mm thick (DuoComb - 17MC on reverse)	32µl
	MS15-20-0.75	Comb 20 sample, 0.75mm thick	7µІ		MS15-20-1.5	Comb 20 sample, 1.5mm thick	15µl
	MS15-10MC-0.75	Comb 10 sample MC, 0.75mm thick	22µl		MS15-10MC-1.5	Comb 10 sample MC, 1.5mm thick	44µl
	MS15-14MC-0.75	Comb 14 sample MC, 0.75mm thick	22µl		MS15-14MC-1.5	Comb 14 sample MC, 1.5mm thick	44µl
	MS15-18MC-0.75	Comb 18 sample MC, 0.75mm thick (DuoComb - 17MC on reverse			MS15-18MC-1.5	Comb 18 sample MC, 1.5mm thick (DuoComb - 17MC on reverse)	41µl
	MS15-28MC-0.75	Comb 28 sample MC, 0.75mm thick	8µІ		MS15-28MC-1.5	Comb 28 sample MC, 1.5mm thick	17μΙ
	MS15-30MC-0.75	Comb 30 sample MC, 0.75mm thick	8µІ		MS15-30MC-1.5	Comb 30 sample MC, 1.5mm thick	17μΙ
	MS15-35-0.75	Comb 35 sample, 0.75mm thick	9μΙ		MS15-35-1.5	Comb 35 sample, 1.5mm thick	19µІ
П	MS15-1-1	Comb Prep 1, Marker 1, 1mm thick	495µl		MS15-1-2	Comb Prep 1, Marker 1, 2mm thick	990µІ
	MS15-2-1	Comb Prep 2, Marker 2, 1mm thick	225µl		MS15-2-2	Comb Prep 2, Marker 2, 2mm thick	450µl
	MS15-4-1	Comb Prep 4, Marker 2, 1mm thick	122µl		MS15-4-2	Comb Prep 4, Marker 2, 2mm thick	243µl
	MS15-10-1	Comb 10 sample, 1mm thick	45µl		MS15-10-2	Comb 10 sample, 2mm thick	90µl
	MS15-12-1	Comb 12 sample, 1mm thick	41µl		MS15-12-2	Comb 12 sample, 2mm thick	81µl
	MS15-16MC-1	Comb 16 sample, 1mm thick (DuoComb - 17MC on reverse)	21µl		MS15-16MC-2	Comb 16 sample, 2mm thick (DuoComb - 17MC on reverse)	43µl
	MS15-20-1	Comb 20 sample, 1mm thick	10µІ		MS15-20-2	Comb 20 sample, 2mm thick	20µІ
	MS15-10MC-1	Comb 10 sample MC, 1mm thick	29µІ		MS15-10MC-2	Comb 10 sample MC, 2mm thick	59µl
	MS15-14MC-1	Comb 14 sample MC, 1mm thick	29µl		MS15-14MC-2	Comb 14 sample MC, 2mm thick	59µl
	MS15-18MC-1	Comb 18 sample MC, 1mm thick (DuoComb - 17MC on reverse)	27μΙ		MS15-18MC-2	Comb 18 sample MC, 2mm thick (DuoComb - 17MC on reverse)	54µl
	MS15-28MC-1	Comb 28 sample MC, 1mm thick	11µl		MS15-28MC-2	Comb 28 sample MC, 2mm thick	23µl
	MS15-30MC-1	Comb 30 sample MC, 1mm thick	11µl		MS15-30MC-2	Comb 30 sample MC, 2mm thick	23µl
	MS15-35-1	Comb 35 sample, 1mm thick	13µI		MS15-35-2	Comb 35 sample, 2mm thick	25µl

^{*} all models include loading guides and casting dams

MC = multichannel pipette compatible

multisub Maxi



multiSUB[™] Maxi is primarily designed for resolution of high numbers of samples such as from Clone Screening or PCR.

multiSUB™ Maxi allows ultra high-resolution separations over extended runs. Tray sizes correspond to standard blotter sizes.

It also allows easy sample transfer onto a membrane for further analysis. Four gel tray sizes are available – **20 x 10cm, 20 x 15cm, 20 x 20cm** and **20 x 25cm**. Multichannel pipette compatible combs up to 40 sample facilitate speed loading of up to 440 samples per gel. 50 sample combs allow maximum sample capacity of 550 samples per gel. Casting dams allow gels to be rapidly cast externally while the multiSUB[™] unit is in use for gel running. For Power Supplies, see page 58.




Casting dams allow gels

to be rapidly cast externally while the MultiSub™ unit is in use for gel running



Flexicaster allows

casting of gel lengths up to 20cm, simply by locking the moveable dam, see page 19

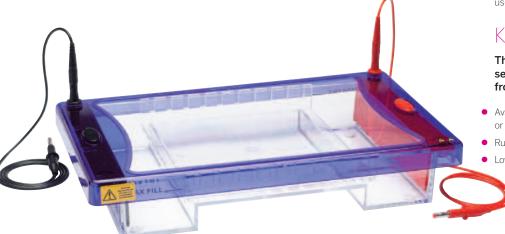

KEY FEATURES

These units are primarily designed for separating high numbers of samples from PCR or cloning:

- Available with 20 x 25cm, 20 x 20cm, 20 x 15cm or 20 x 10cm gel trays
- Run up to 550 samples
- Low buffer volumes

ORDERING	INFORMATION				
MSMAXI20	multiSUB Maxi, 20 x 20cm UV Tray, 2 x 20 san	nple comb*	MSMAXI25 multiSUB Ma	xi, 20 x 25cm U'	V Tray, 2 x 20 sample combs*
MSMAXI10	multiSUB Maxi, 20 x 10cm UV Tray, 2 x 20 sam	ple combs*	MSMAXIDUO multiSUB Ma	xi Duo , 20 x 10 8	& 20 x 20cm UV Tray, 2 x 20 sample combs*
MSMAXI15	multiSUB Maxi, 20 x 15cm UV Tray, 2 x 20 sam	ple combs*			
MS20-UV10	20 x 10cm UV Tray	MS20-NE	Negative Electrode	MSMAXIxCS	Clearsight Maxi, as above with
MS20-UV20	20 x 20cm UV Tray	MS20-UVS	20cm UV Gel Scoop		Fan & Power Source
MS20-UV25	20 x 25cm UV Tray	MSMAXICP	Cool-Pack and Platform		where 'x' should be replaced with
MS20-UVDAN	1 Casting Dams, pk/2	MSMAXIBSB	Buffer Saver Blocks pk/2, saves 450ml of buffer		'10', '15', '20', '25' or 'duo'
MS20-LG	Adhesive Loading Guides	MS15/20-FC	Flexicaster for multiSUB Choice / Maxi		
MS20-PE	Positive Electrode	CSL-GLT	Gel Levelling Table		

E CODE	DESCRIPTION	Sample Volume for a 5mm thick gel	S CODE	DESCRIPTION	Sample Volume for a 5mm thick gel
MS20-1-0.75	Comb Prep 1, Marker 1, 0.75mm thick	506µІ	MS20-1-1.5	Comb Prep 1, Marker 1, 1.5mm thick	1013µІ
MS20-2-0.75	Comb Prep 2, Marker 2, 0.75mm thick	236µІ	MS20-2-1.5	Comb Prep 2, Marker 2, 1.5mm thick	473µl
MS20-4-0.75	Comb Prep 4, Marker 2, 0.75mm thick	115µІ	MS20-4-1.5	Comb Prep 4, Marker 2, 1.5mm thick	230µІ
MS20-10-0.75	Comb 10 sample, 0.75mm thick	54µl	MS20-10-1.5	Comb 10 sample, 1.5mm thick	108μΙ
MS20-16-0.75	Comb 16 sample, 0.75mm thick	30µІ	MS20-16-1.5	Comb 16 sample, 1.5mm thick	61µl
MS20-20MC-0.75	Comb 20 sample MC, 0.75mm thick	20µІ	MS20-20MC-1.5	Comb 20 sample MC, 1.5mm thick	41µl
MS20-25-0.75	Comb 25 sample, 0.75mm thick	16µІ	MS20-25-1.5	Comb 25 sample, 1.5mm thick	32µІ
MS20-30-0.75	Comb 30 sample, 0.75mm thick	13µІ	MS20-30-1.5	Comb 30 sample, 1.5mm thick	26µІ
MS20-36-0.75	Comb 36 sample, 0.75mm thick	11µІ	MS20-36-1.5	Comb 36 sample, 1.5mm thick	22µI
MS20-40MC-0.75	Comb 40 sample MC, 0.75mm thick	8µІ	MS20-40MC-1.5	Comb 40 sample MC, 1.5mm thick	17µІ
MS20-50-0.75	Comb 50 sample, 0.75mm thick	8µІ	MS20-50-1.5	Comb 50 sample, 1.5mm thick	16µІ
MS20-1-1	Comb Prep 1, Marker 1, 1mm thick	675µl	MS20-1-2	Comb Prep 1, Marker 1, 2mm thick	1350µІ
MS20-2-1	Comb Prep 2, Marker 2, 1mm thick	315µІ	MS20-2-2	Comb Prep 2, Marker 2, 2mm thick	630µІ
MS20-4-1	Comb Prep 4, Marker 2, 1mm thick	153µІ	MS20-4-2	Comb Prep 4, Marker 2, 2mm thick	306µІ
MS20-10-1	Comb 10 sample, 1mm thick	72µl	MS20-10-2	Comb 10 sample, 2mm thick	144μΙ
MS20-16-1	Comb 16 sample, 1mm thick	41µІ	MS20-16-2	Comb 16 sample, 2mm thick	81µІ
MS20-20MC-1	Comb 20 sample MC, 1mm thick	27µІ	MS20-20MC-2	Comb 20 sample MC, 2mm thick	54µІ
MS20-25-1	Comb 25 sample, 1mm thick	21µl	MS20-25-2	Comb 25 sample, 2mm thick	42µІ
MS20-30-1	Comb 30 sample, 1mm thick	17μΙ	MS20-30-2	Comb 30 sample, 2mm thick	34µІ
MS20-36-1	Comb 36 sample, 1mm thick	14µІ	MS20-36-2	Comb 36 sample, 2mm thick	29µI
MS20-40MC-1	Comb 40 sample MC, 1mm thick	11µІ	MS20-40MC-2	Comb 40 sample MC, 2mm thick	23µI
MS20-50-1	Comb 50 sample, 1mm thick	10μΙ	MS20-50-2	Comb 50 sample, 2mm thick	21µI






multiSUB[™] Screen was designed for rapid screening of very large numbers of Clone Screenings or PCR samples.

multiSUB™ Screen horizontal gel unit has a maximum sample capacity of 672 per gel. This allows loading and analysis of exactly seven 96 well format micro titre plates. The large gel run length of 32cm also allows resolution of samples over a long distance for separation of complex sample bands such as in restriction fragment analysis.

The unit is available with a full length tray or with other tray length options of 16 or 24cm so that the user's exact requirements can be matched. In addition to options for single length gel trays, multiSUB $^{\text{\tiny M}}$ Screen is available with all three gel tray lengths to provide the maximum in flexibility, versatility and value.

Buffer recirculation ports are included as standard to allow enhanced resolution over extended runs while loading guides improve well visibility for easy sample loading. For Power Supplies, see page 58.






Leak free casting assured, even with agarose at 80°C are multichannel pipette compatible

KEY FEATURES

multiSUB Screen is ideal for checking very large numbers of samples or extended high resolution separations

- Available with 26 x 16, 26 x 24 and 26 x 32cm or all three gel trays
- Run up to 672 samples
- Multichannel pipette compatible combs for speed





Buffer circulation ports included as standard

ORDERING IN	FORMATION						
MSSCREEN16 multiSUB Screen, 26 x 16cm UV Tray, 6 x 28 sample combs, loading guides and Flexicaster							
MSSCREEN24 multiSUB Screen, 26 x 24cm UV Tray, 6 x 28 sample combs, loading guides and Flexicaster							
MSSCREEN32	multiSUB Screen, 26 x 32cm UV Tray, 6 x 28 s	ample combs, load	ing guides and Flexicaster				
MSSCREENTRIC	multiSUB Screen Trio, 26 x 16cm, 26 x 24cm,	26 x 32cm UV Tray:	s, 6×28 sample combs, loading guides and Flex	icaster			
MS26-UV32	26 x 32cm UV Tray	MS26-PE	Positive Electrode	MS26-FC	Flexicaster for gels up to 32cm.		
MS26-UV24	26 x 24cm UV Tray	MS26-NE	Negative Electrode		Casts 7, 10, 15, 16, 20, 24 and 32cm long gels		
MS26-UV16	26 x 16cm UV Tray	MSSCRNCP	Cool-Pack and Platform				
MS26-LG	Adhesive Loading Guides	MU-D01	Single Channel Peristaltic Pump, 30-100rpm				
MS26-UVS	26cm UV Gel Scoop	MSSCREENBSB	Buffer Saver Blocks, pk/2 saves 625ml of buffer				


E CODE	DESCRIPTION	Sample Volume for a 5mm thick gel	S CODE	DESCRIPTION	Sample Volume for a 5mm thick gel
MS26-28MC-0.75	Comb 28 sample MC, 0.75mm thick	25µІ	MS26-28MC-1.5	Comb 28 sample MC, 1.5mm thick	51µІ
MS26-56MC-0.75	Comb 56 sample MC, 0.75mm thick	10μΙ	MS26-56MC-1.5	Comb 56 sample MC, 1.5mm thick	20μΙ
MS26-28MC-1	Comb 28 sample MC, 1mm thick	34µl	MS26-28MC-2	Comb 28 sample MC, 2mm thick	68µl
MS26-56MC-1	Comb 56 sample MC, 1mm thick	14μΙ	MS26-56MC-2	Comb 56 sample MC, 2mm thick	27μΙ





The multiSUB Series horizontal electrophoresis units include a range of accessories to enhance functionality and ease of use in the lab. Further accessories are available as optional extras and all accessories can be ordered separately and all parts are available as spares.

Accessories included as standard

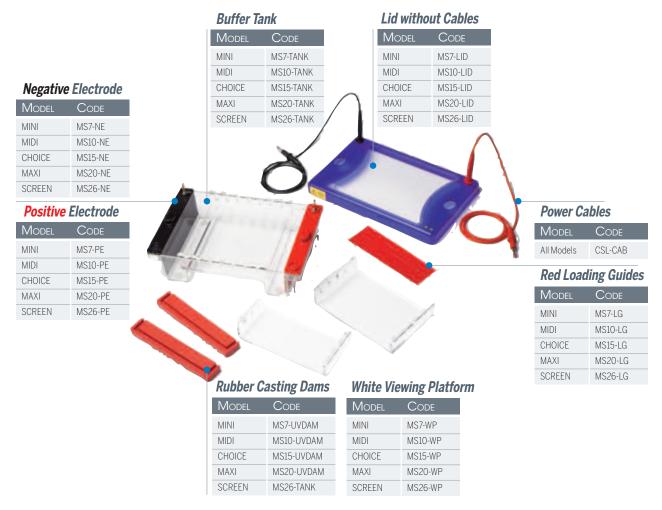

Accessories available as options



M	IINII	
	IIIVI	MS7-MSMINICP
M	IIDI	MS10-MSMIDICP
CI	HOICE	MS15-MSCHOICECP
M	IAXI	MS20-MSMAXICP
SC	CREEN	MS26-MSSCREENCP

FLEXICASTERS	Model	Code
	MINI	MS7/10-FC
	MIDI	MS7/10-FC
	CHOICE	MS15/20-FC
	MAXI	MS15/20-FC
	SCREEN	MS26-FC

BUFFER SAVER BLOCKS	Model	Code
<i>a</i>	MINI	MSMINIBSB
	MIDI	MSMIDIBSB
	CHOICE	MSCHOICEBSB
	MAXI	MSMAXIBSB
	SCREEN	MSSCREENBSB





loading every second row

multiSUB Horizontal Gel Chambers can accommodate a wide variety of casting combs. Standard options are shown below, while custom combs can be manufactured on request. To select a comb, just add the desired thickness to the end of the comb code to get the complete ordering code, for example, MS7-8-1 is a 1 mm thick comb and MS2-4-1.5 is a 1.5 mm comb. Well volume shown below is for 1 mm thick combs.


Colour-coded combs for the multiSUB are available in 4 thicknesses,

Black – 0.75mm for tightly resolved bands **Red** – 1.5mm to maximise sample volume

White – 1mm supplied as standard

Blue – 2mm to maximise sample volume

Black and white combs recommended for high resolution gels and publication quality data; red and blue to scale-up nucleic acid volumes for preparatory techniques.

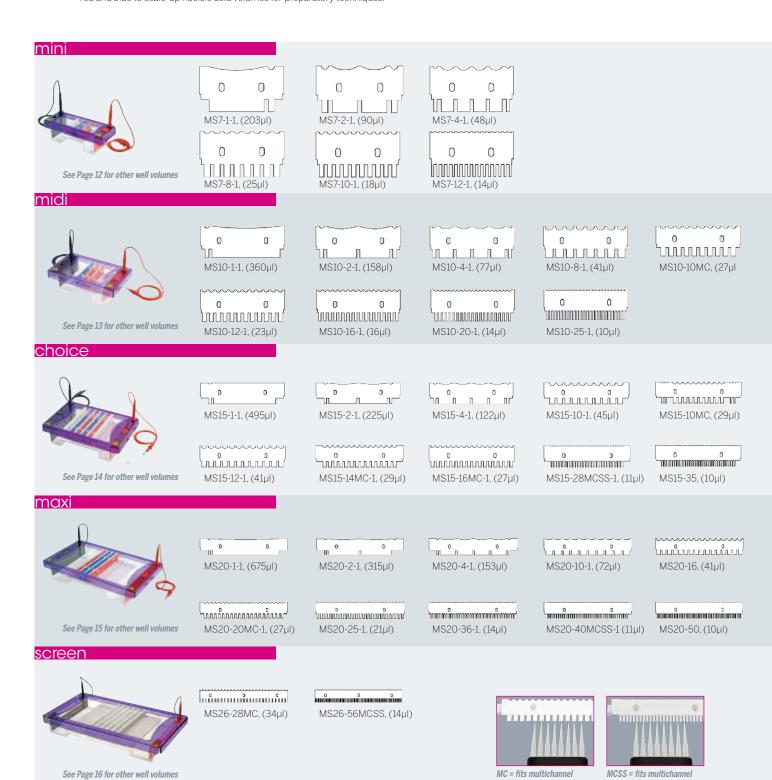





The **multiSUB™ miniONE** electrophoresis system includes all of the equipment that you need to get up and running: gel tank, power supply and two casting sets. This gel tank/power supply combination is compact and easy to use.

multiSUB miniONE is an all in one horizontal electrophoresis unit. Featuring a built in power supply with voltage options of 35V, 50V and 100V, the miniONE is a versatile system suitable for a wide range of applications. A built in timer for runs from 0-99 minutes means you can set up your parameters and leave the system to complete the run automatically without fear of loosing bands.

The system comes complete with 2 gel casters for wide and mini gels as well as reversible combs for high throughput or high sample volume.

KEY FEATURES

miniONE electrophoresis system is ideal for personal use, small laboratories or the classroom.

- All in one horizontal electrophoresis system
- In built power supply with 35V, 50V and 100V settings
- Timer function for runs form 0 99 minutes
- 2 gel sizes and reversible comb options





Technical Spe	cifications
Input Power	AC100~120V, 50~60Hz / AC200~240V, 50~60Hz
OUTPUT POWER	DC35V / DC50V / DC100V
BATH DIMENSIONS (MM)	120 х 110 х 45мм
VOLUME OF TANK	230мL
Construction of Bath	PC+ABS WITH HIGH TEMPERATURE RESISTANCE
TIMER RANGE	1міп~99міп
Max.Power	40W









Pour and cast gel

Place tray in unit and cover with buffer

Load samples

Start the run

ORDERING INFOR	Ordering Information						
MSMINIONE	Includes multiSUB™ miniONE electrophoresis system with	MSO-GCL	multiSUB miniONE Gel Caster – Large				
	Built in power supply,	MSO-GCS	multiSUB miniONE Gel Caster – Small				
	2 x MSO-UVL, 4 x MSO-UVS, 1 x MSO-GCL, 1 x MSO-GCS,	MSO-UVL	multiSUB miniONE Large Gel Tray 110mm×60mm				
	2 x MSO-1-5/9DS, 2 x MSO-1-12/22DS	MSO-UVS	multiSUB miniONE Small Gel Tray 54mm×60mm				
MSO-1-12/22DS	Full length combs for miniONE Large Tray						
MSO-1-5/9DS	Double Comb for miniONE small gel trays						






The **multiSUB™ Midi96 Gel System** allows a full 96 well plate to be loaded directly via an 8 channel pipette, making it perfect for high throughput work.

Its 10x12cm (W x L) gel dimensions and 96-well comb block format correspond to the standard microplate configuration. One or Two marker lanes and a run length of 1.8 cm for resolving DNA fragments. Multichannel pipette compatible well spacing allows fast sample loading. MSMIDI96ST Stretch Systems are also available for those users requiring an extended run length per well of up to 3.6cm, or for loading of samples from two 96-well plates - MSMIDI96STDBL.

KEY FEATURES

multiSUB MIDI96 is Ideal for analysis of up to 96 PCR- fragment length polymorphisms loaded from 96-well microplates or thermal cycler blocks

- Ideal for high throughput electrophoresis
- Average run-time is just 15 to 30 minutes
- Direct microplate format for easy lane identification
- Multi-channel pipette compatible combs for speed loading

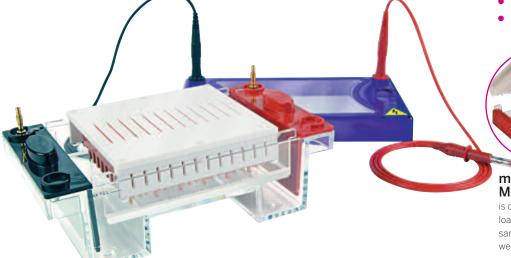



is designed for loading of DNA samples from multiwell plates



Comb blocks,


available as standard and stretched options, are multichannel pipette compatible for speed loading



96 format UV tray with a cast gel



A cast gel



Load using a multichannel pipette

ORDERING INFORMA	ATION	
MSMIDI96	multiSUB Midi96, UV tray, Comb block with 12 x 8 sample, 1mm thick of	ombs, casting dams; Run length = 1.8cm
MSMID1961.5 multiSUB Midi96, UV tray, Comb block with 12 x 8 sample, 1.5mm thick combs, casting dams. Combs have one marker lane; Run length = 1.8cm		
MSMIDI96/2M	multiSUB Midi96, UV tray, Comb block with 12 x 8 sample, 1mm thick c	ombs, casting dams. Combs have two marker lanes; Run length = 1.8cm
MSMIDI96/1.5/2M	multiSUB Midi96, UV tray, Comb block with 12 x 8 sample, 1.5mm thick	combs, casting dams. Combs have two marker lanes; Run length = 1.8cm
MSMIDI96ST	multiSUB Midi96 Stretch, UV tray, Comb block with 12 x 8 sample, 1m	m thick combs, casting dams; Run length = 3.6cm
MSMIDI96ST1.5	multiSUB Midi96 Stretch, UV tray, Comb block with 12 x 8 sample, 1.5r	mm thick combs, casting dams. Combs have one marker lane; Run length = 3.6cm
MSMIDI96ST/2M	multiSUB Midi96 Stretch, UV tray, Comb block with 12 x 8 sample, 1mm	m thick combs, casting dams. Combs have two marker lanes; Run length = 3.6cm
MSMIDI96ST/1.5/2M	multiSUB Midi96 Stretch, UV tray, Comb block with 12 x 8 sample, 1.5	mm thick combs, casting dams. Combs have two marker lanes; Run length = 3.6cm
MSMIDI96STDBL	multiSUB Midi96 Stretch, UV tray, Comb block with 24 x 8 sample, 1m	m thick combs, casting dams - Note: run length = 1.8cm.
COMB BLOCKS		
MSMIDI96-8-1-CB	Midi96 Comb 8 sample MC + 1 Marker, 1mm thick	MSMIDI96ST-8-1.5-CB* Midi96 STRETCH Comb 8 sample MC + 1 Marker, 1.5mm thick
MSMIDI96-8-1.5-CB	Midi96 Comb 8 sample MC + 1 Marker, 1.5mm thick	MSMIDI96ST-8-1.5/2M-CB* Midi96 STRETCH Comb 8 sample MC + 2 Marker, 1mm thick
MSMIDI96-8-1/2M-CB	Midi96 Comb 8 sample MC + 2 Marker, 1mm thick	MSMIDI96ST-8-1.5/2M-CB* Midi96 STRETCH Comb 8 sample MC + 2 Marker, 1.5mm thick
MSMIDI96-8-1.5/2M-CB	Midi96 Comb 8 sample MC + 2 Marker, 1.5mm thick	MS10-UV96 multisub Midi, 96 well tray
MSMIDI96ST-8-1-CB*	Midi96 STRETCH Comb 8 sample MC + 1 Marker, 1mm thick	MS10-UV96ST multisub Midi STRETCH, 96 well tray

M U I T I S U B miniRAPIDE



The **miniRAPIDE** makes imaging your gels simple. With its UV transparent base there is no need to handle the gel directly, prefect for teaching or space restricted labs.



KEY FEATURES

miniRAPIDE is intended for agarose gel electrophoresis

- UV Transparent for direct gel imaging
- Low buffer volumes for low cost running
- Multichannel pipette compatible combs for speed

TECHNICAL SPE	CIFICATIONS
GEL DIMENSIONS,	10 x 8cm (W x L)
UNIT DIMENSIONS	15 x 15 x 4cm (W x D x H)
MAX. SAMPLE CAPACITY	40 SAMPLES
Buffer volume	50mL
COMBS AVAILABLE: No. of SAMPLES THICKNESSES	1, 4, 8, 12, 16, 20 1, 1.5 _{MM}

ORDERING INFORMATION

FMMS10

 $\label{eq:miniRapide} \textbf{miniRapide}, 10 \times 8 \text{cm}, 2 \times 8 \text{ sample combs } 1.5 \text{mm and casting dams}$

FMMS-DAM

miniRapide Casting dams, pk/2

RPW0.2

Replacement Platinum Wire 0.2mm - 50cm

Combs

FMMS-4-1, (90µl)

For 1.5mm comes, replace -1 with -1.5 in the ordering code e.g. FMMS-4-1.5.

FMMS-8-1, (40µI)

TUUUUUUU FMMS-12-1, (25µI) TMMMMMMT FMMS-20MC-1, (10µl)

multiSUB-4

multiSUB-4 is a compact system capable of running over 1200 samples simultaneously by stacking up to 4

horizontal gels.

Each multiSUB-4 is supplied with 4 gel trays and 8 combs as standard. Two double-sided comb and three tray length formats, 8x6, 8x12 and 8x18cm are also available. These multichannel-compatible combs and gel plate configurations are compatible with microplates and thermal cycler blocks to ensure rapid loading of DNA minipreps and PCR products by 8-channel pipette.



- Separates a maximum 1200 samples in as little as 15 minutes in 4 stacked gel trays
- Double-sided 1.5mm thick combs allow more sample volume to be loaded into each well
- Three gel tray options available in 8x6, 8x12 and 8x18cm (WxL) sizes for maximum flexibility
- Optional Flexicaster



TECHNICAL SPECIFICATIONS

GEL DIMENSIONS (W X L)	8 x 6cm, 8 x 12cm, 8 x 18cm
UNIT DIMENSIONS	11 x 35 x 16cm
Max. sample capacity per 18cm tray	WITH 1cm run length: 306 WITH 2cm run length: 144 WITH 3cm run length: 72
Buffer volume	200, 400, 600 or 800ml (for 1, 2, 3 or 4 gel trays resp.)
COMBS AVAILABLE: No. of samples Thicknesses	1, 8, 12, 18 DuoCoмвs 1, 1.5мм

ORDERING INFORMATION

CSL-MULTISUB4	multiSUB-4 multi-level Gel Chamber, includes 4x 12cm UV Trays, 8x 18/8 Sample 1.5mm Combs (Tape UV Trays to seal)				
MULTISUB4EXCAS	Multisub-4, as above but with External Caster for 4 gels	MSUB4-12/1-1	12/1 Sample 1mm Combs for multiSUB-4		
MSUB4UV6	multiSUB-4 tray 8 x 6cm	MSUB4-18/8-1	18/8 Sample 1mm Combs for multiSUB-4		
MSUB4UV12	multiSUB-4 tray 8 x 12cm	MSUB4-12/1-1.5	12/1 Sample 1.5mm Combs for multiSUB-4		
MSUB4UV18	multiSUB-4 tray 8 x 18cm	MSUB4-18/8-1.5	18/8 Sample 1.5mm Combs for multiSUB-4		



runVIEW includes everything* required to perform horizontal real-time gel electrophoresis with high resolution capability within a single compact bench top unit. The optional gel documentation system fits directly over the base unit and gel tank for imaging at the end of the electrophoresis run. runVIEW offers exceptional value, costing 30-50% less than individual components; gel tank, power supply and transilluminator




runVIEW is an innovative system that combines blue LED lighting and an inbuilt power supply to create a real time electrophoresis system giving you near instant verification of results. Perfect for saving time in quick sample check or for teaching the principles of electrophoresis.



place the gel tank and agarose gel onto the base station



load samples as with the standard MSCHOICE tank



fit the bluVIEW lid and start the run to observe band in real time

Original runVIEW CHOICE consists of an multiSUB CHOICE gel chamber with special bluVIEW lid, containing an orange spectral emission filter within its viewing pane, plus a base unit with integrated power supply and blue LED gel illuminator.

Track DNA without harmful UV

UV light can cause detrimental effects to the structure of DNA, meaning DNA extracted from UV imaged gels have significantly lower yields in downstream applications such as cloning and sequencing. Blue light, at a high wavelength massively increases downstream yield in comparison to UV when used for gel visualisation. Not only does the runVIEW system allow increased downstream reliability, it also protects the user from exposure to UV light, and provides a real time view of DNA migration, meaning constant check using gel documentation systems are no longer required.

No expensive commercial gels

runVIEW works with standard EtBr, SYBR Green and SYBR Safe gels cast within the 15x7, 15x10 or 15x15cm CHOICE gel trays, and therefore does not require expensive precast gels and accessories.

A self-contained system

The base unit, which houses the in-built power supply and blue LED gel illuminator, is compact, dual-voltage and portable, and allows electrophoresis, gel visualisation and extraction to be performed at the bench, without the inconvenience of having to transport gels to a darkroom elsewhere within the laboratory.



runview

runVIEW systems consists of a multiSUB gel chamber with special bluVIEW lid, containing an orange spectral emission filter within its viewing pane, plus a base unit with integrated power supply and blue LED gel illuminator.

Three models comprise the runVIEW series, the original runVIEW™ CHOICE, plus runVIEW™ MINI and MIDI. All systems benefit from the blue light illumination of fluorescently stained agarose gels to allow users to view the size fractionation of nucleic acids in real-time. While runVIEW™ CHOICE features a power supply integrated within the base unit, for runVIEW™ MINI and MIDI, an adjustable blue-light illuminator platform accommodates both the MINI and MIDI electrophoresis tanks. Band visualisation is achieved through the corresponding lid containing an orange spectral emission filter. Each lid remains free of condensation through a built in extractor fan.



KEY FEATURES

These units are primarily designed to facilitate Real-time size fractionation and recovery of nucleic acids:

- Power supply integrated within the base unit adjustable in precise 1V or 1mA increments to a maximum 150V or 300mA constant voltage or current output; timer function to 999 minutes for extended runs
- Specialist combs for specialist applications doublesided 1mm preparatory combs (1-/2-sample and 4-/16-sample standard) included for nucleic acid recovery, plus four multichannel compatible 20-/28-sample combs for rapid screening of nucleic acids from 96-well thermal cycler blocks and microtitre plates. Extra thick 3mm preparatory combs also included for enhanced DNA recovery.



TECHNICAL SPECIFIC	Technical Specifications						
RUNVIEW CHOIC	RUNVIEW CHOICE VIEWING DOCK						
Blue Light Wavelength	470nm	Timer	1-999 minutes with alarm				
Voltage/ Resolution	25-150V / 1V	Safety Device	No load detection				
Current/ Resolution	300mA / 1mA	Operating Temperature	Ambient to 40°C				
Power	30W	Dimensions	293 x 220 x 80 mm				
Operating Mode	Constant Voltage or Current	Rated Voltage	100-240V, 50/60Hz				
RUNVIEW GEL SYST	TEM						
Gel Dimensions (W x L)	15 x 7, 15 x 10 and 15 x 15cm	Combs	2x 1-sample / 2-sample preparatory; Included Double-sided combs,				
Unit Dimensions (W x D x	H) 6.5 x 17.5 x 9cm		2x 4-sample preparatory / 16-sample combs; 4x 20- /28-sample				
Buffer volume	500ml		multichannel compatible screening (1mm); plus 2x 4- and				
runVIEW Lid Design	Orange spectral emission filter with		2x 6-sample preparatory with loading guides (3mm)				
	condensation-free viewing pane	Comb Thickness	1mm, 3mm				

ORDERING INFORMATION

CSL-RVMSCHOICE7 runVIEW® CHOICE complete with 15 x 7cm gel tray & 2x1 sample, 2x 2 sample, 2x 4 sample, 4x 28MC sample 1mm combs; plus 2x 4- and 2x 6-sample 3mm preparatory

CSL-RVMSCHOICE10 runVIEW® CHOICE complete with 15 x 10cm gel tray & 2 x 1 sample, 2x 2 sample, 2x 4 sample, 4x 28MC sample 1mm combs; plus 2x 4- and 2x 6-sample 3mm preparatory

CSL-RVMSCHOICE15 runVIEW® CHOICE complete with 15 x 15cm gel tray & 2x 1 sample, 2x 2 sample, 2x 4 sample, 4x 28MC sample 1mm combs; plus 2x 4- and 2x 6-sample 3mm preparatory

CSL-RVMSCHOICETRIO runVIEW® CHOICE complete with 15x7cm, 15x10 & 15x15 gel tray & 2x1 sample, 2x 2 sample, 2x 4 sample, 4x 28MC sample 1mm combs; plus 2x 4- and 2x 6-sample 3mm preparatory

CSL-RVSTATION complete with RVGELDOC and RVCHOICETRIO

CSL-RVMSBSBVLID runVIEW Base Station & bluVIEW Lid







KEY FEATURES

RunVIEW MINI and MIDI are ideal for quick checks of low to medium numbers of samples following PCR and cloning.

- runVIEW[™] CONVERTER package with emission filter lid and blue light illuminator, to allow standard MSMINI and MSMIDI units to be converted to real-time electrophoresis
- runVIEW™ STANDARD package includes blue light illuminator, and runVIEW™ MINI or MIDI tank, for those users with their own power supply
- Blue light is completely safe to both operator and DNA alike, and results in improved cloning efficiency compared to UV
- Emission filter lid with built-in extractor fan enables condensation-free viewing of gels

ORDERING INFORMATION

CSL-RVMSMINI-S CSL-RVBSBVLID-MINI plus MSMINIDUO tank with 7x7 & 7x10cm trays, 1 set of casting dams and 2x 8-sample combs

CSL-RVBSBVLID-MIDI plus MSMIDIDUO tank with 10x7 & 10x10cm trays, 1 set of casting dams and 2x16-sample combs


CSL-RVBSBV- LID-MINI runVIEW** Base Station & bluVIEW lid for MS- MINI systems CSL-RVBSBV- LID-MIDI runVIEW** Base Station & bluVIEW lid for MS- MIDI systems

rundoc

runDOC is a portable, lightweight gel documentation system with small footprint, designed exclusively for use with runVIEW.

The runDOC is designed exclusively to fit and complement the runVIEW to provide a complete real-time electrophoresis and imaging system. It comprises a lightweight darkroom hood and a high resolution 18 megapixel digital camera to capture images of nucleic acid gels stained with for example Et-Br, SYBR and runSAFE.





Traditional gelDOC – The 18 megapixels CMOS camera
of the runDOC enables to capture high resolution
publication quality images using the runview base as a
transilluminator

KEY FEATURES

 Versatile - Interchangeable filter slides and bluVIEW filter allow to capture images of DNA bands stained with a variety of safe stains such as runSAFE, SYBR green, Et-Br etc.

CAMERA*	
Түре	1/1.7 Type Cmos Sensor With Digi4+ Processo
LENS TYPE	EF-S 18-55MM
EFFECTIVE PIXELS	18 MegaPixels
MAXIMUM APERTURE	F/3.5 (W) - F/5.6 (H)
SHUTTER SPEED	30 - 1/4000s. (Total Range)
CAMERA FILTER	+3 CLOSE UP
RUNDOC FILTER SLIDE	ORANGE FILTER FOR ETBR;
	AMBER FILTER FOR SYBR AND RUNSAFE
STORAGE MEDIA	8GB SD MEMORY CARD
DARK ROOM	
DARKROOM MATERIAL	EBONY ACRYLIC
DIMENSIONS / WEIGHT	40х34х19.5cм (HxWxD) / 0.8кg
Power	RECHARGEABLE LI-ION BATTERY AND
	Plug-In Charger
	OPTIONAL MAINS CABLE CHARGER

ORDERING INFORMATION

CSL-RVGELDOC runVIEW® Gel Documentation Hood with 18MP camera CSL-RVSTATION runSTATION complete with RVGELDOC and RVCHOICETRIO

CSL-RVGELDOCSYS runVIEW® Gel Documentation Hood with camera, laptop & 1D Analysis Software RVGELDOC-F1 Orange Filter for runDOC (Ethidium Bromide)

RVGELDOC-F2 Amber Filter for runDOC (runSAFE and SYBR stains)



r u n s a f Ξ

The runSAFE range comprises four stain and loading dye combinations to visualize electrophoretic mobility of a wide range of DNA in agarose gels


runSAFE is conveniently supplied in a 6x loading dye which is mixed with 5 parts double-stranded DNA before loading onto an agarose gel. runSAFE is non-toxic, safe for the environment and can be disposed of in the regular laboratory waste without using expensive decontamination methods. runSAFE is sensitive and binds DNA to detect as little as 0.2ng DNA per band within a gel; while gel imaging is best performed using the amber emission filter found of the bluVIEW lid or runDOC filter slide. The runSAFE Range is comprised as follows::

- runSAFE general purpose stain for DNA ranging from 50bp markers to large super-coiled plasmid
- runSAFE-PLUS500 for DNA larger than 500bp in size
- runSAFE-2000 for DNA vectors and inserts ranging from 500-2000bp
- runSAFE-500 for small DNA fragments, PCR products, sequence tracts and primers less than 500bp

KEY FEATURES

- Safe all four runSAFE stains have ultra-low toxicity (LC>5000mg/kg) and lack cell permeability
- Convenient each stain is supplied as a ready to use 6x Loading dye; simply add 1 part stain to 5 parts DNA, mix and load your gel
- Fast no time-consuming post-staining or de-staining of gels is required.
- Sensitive very low background staining of the gel; detects as little as 0.2ng DNA per band
- Flexible each stain may be used with Blue or UV light

runSAFE - less DNA damage, improved cloning efficiency



Slower migrating species, indicative of a linear or relaxed circular vector, resulting from DNA nicking or strand breaks, are significantly reduced in DNA plasmid mixed with run-SAFE and exposed to blue light. The concentration of nicked DNA plasmid increases significantly after 8' of exposure to EtBR and UV irradiation.

gel cutting tips



Gel Excision Tips offer a convenient and efficient one handed method of removing bands using a simple and rapid two-step process. The tips, in two sizes, 4.0 x 1 mm and 6.5 x 1 mm, cut directly into agarose or acrylamide gels, so eliminating cross contamination between samples. Alternative methods which require multiple steps including washing or rinsing are slow and tedious. These tips allow a safe and efficient one handed operation, with a push button gel and tip release, providing researchers with uniform extractions. Tips fit standard 1000µl pipettors and are available in bags and racks.







	Ordering Information					
	runSAFE	Description	Tracking Dyes			Size Range
	CSL-RUNSAFE	runSAFE stain, 1ml	Bromophenol Blue, Xylene Cya	anol FF, Orange G		50bp – 20Kb
	CSL-RUNSAFE-PLUS500	runSAFE-PLUS500 stain, 1ml	Bromophenol Blue, Xylene Cyanol Blue >		>500bp	
	CSL-RUNSAFE- 2000	runSAFE- 2000, 1ml	Xylene Cyanol Blue, Orange G			500-2000bp
	CSL-RUNSAFE- 500	runSAFE-500, 1ml	Orange G			<500bp
(GEL EXCISION TIPS					
	CSL-GELX4	Rectangular Tips - 6.5mm x 1mm, bag/250)	CSL-GELX6.5	Rectangular Tips -	4.0mm x 1mm, bag/250
	CSL-GELX4 RACK	Rectangular Tips - 6.5mm x 1mm, 5x racks	of 48	CSL-GELX6.5RACK	Rectangular Tips -	4.0mm x 1mm, 5x racks of 48



dnaladders

Pre-made and containing loading dye for immediate use, Cleaver Scientific's ready-to-use DNA markers are specially formulated to run accurately and produce sharp, well defined ladders.

Available in six molecular weight ranges and composed of discrete marker fragments isolated from restriction-digested proprietary plasmids, each DNA marker will remain stable for up to 6 months at room temperature and 12 months if kept in the fridge at 4°C. Each marker contains high intensity reference bands and may be used to perform size comparisons with DNA molecules ranging from the smallest of PCR fragments to large, linearised cosmid vectors.




Ready to use
Crisp band patterns

KEY FEATURES

Stable at room temperature

Includes bromophenol blue for ease of use




DNA Mass


(ng/5µl)

2% TAE agarose gel


CSL-MDNA-50BP

Base Pairs










1.5 % TAE agarose gel



Please Note: Ladder banding patterns subject to change, identifiable range will remain the same

Ordering Informatio	PN .					
Cat. No.	CSL-MDNA-100BPH	CSL-MDNA-100BP	CSL-MDNA-1KB	CSL-MDNA-50BP	CSL-MDNA-BR	CSL-MDNA-HR
Size Range	100-3000bp	100-1500bp	250bp-10kb	50-1500bp	100bp-10kb	250bp-25kb
Number of bands	12	11	13	17	19	14
Reference bands	500, 1500bp	500, 1500bp	1Kb, 3kb	200, 500bp	500bp, 1.5 & 3kb	1Kb, 3kb
Package concentration	54μg/500μl vial	50μg/500μl vial	50µg/500µl vial	56µg/500µl vial	86μg/500μl vial	52μg/500μl vial
Storage	6 months at 25°C, 12 months at 4°C & 24 months at - 20°C					
Recommended loading v	/ol. 5μl/well	5μl/well	5µl/well	5μl/well	5μl/well	5μl/well
Tracking dyes	Orange G, Xylene Cyanol FF, Bromophenol Blue					
Source	Proprietary plasmids and PCR fragments phenol-extracted following restriction digestion					
	and dissolved in 10mM Tris-HCl (pH 8.0) and 10mM EDTA					



buffers&DYES

Nucleic acid agarose gel electrophoresis is usually conducted with either Tris-acetate-EDTA (TAE) buffer or Tris-borate-EDTA (TBE) buffer. While TAE buffer provides faster electrophoretic migration of linear DNA and better resolution of supercoiled DNA, TBE buffers have a stronger buffering capacity for longer or higher voltage electrophoresis runs.

TBE and **TAE** electrophoresis buffers are used for faster separations of linear double-stranded DNA.

Cleaver Scientific dry TBE is supplied in packs of 10 powder sachets to maintain shelf life. Each buffer sachet may be opened as required and reconstituted in distilled water to make 1 litre of working solution. Buffers are also provided as ready-made 50x TAE and 10x TBE solutions in 1 and 5 litre volumes. These are ideal for laboratories running horizontal nucleic acid gels on a daily basis that require off-the-shelf working stock solutions.



10X Bromophenol Blue DNA loading dye, the standard tracking dye for electrophoresis. The charge-to-mass ratio of bromophenol blue allows it to co-migrate with smaller molecules within agarose and PAGE gels (e.g. at 300bp in a standard 1% agarose, TBE gel) which, with its conspicuous dark blue colour, makes it the perfect tracking dye to monitor the progress of electrophoresis runs. DNA loading dye is supplied in 1ml volumes for easy handling.

Orange G Loading dye 1x (with ficoll) Used as a marker in PAGE and Agarose electrophoresis of DNA, as it migrates through the gel consistently with smaller DNA fragments. Contains sucrose and Xylene Cyanol. Used as a 1x solution.

RNAse free water, DEPC-treated to eliminate enzyme activity and then autoclaved, this sterile highly purified water product is perfect for use in PCR and Northern blotting techniques. RNase-Free water is available either as a single 250ml bottle or in fifty 5ml aliquots to prevent cross-contamination.

TECHNICAL SPECIFICATIONS

TAE FINAL CONSTITUENT CONCENTRATIONS: TRIS ACETATE 0.04M, EDTA 0.001M, PH 8.0

TBE FINAL CONSTITUENT CONCENTRATIONS: TRIS 0.089M, BORIC ACID 0.089M, EDTA 0.002M, PH 8.3

Purified water (18 mega Ohms) for use with sensitive experimental procedures often needs verifying as pyrogen free, this is done using the LAL test or Limulus (Horseshoe crab) amoebocyte lysate assay. The LAL test is extremely sensitive to endotoxins which are the result of bacterial lysis.

BP Grade Sterile Water has endotoxins removed by electrostatic filtration at the final purification stage prior to autoclaving. The LAL tested water conforms to the standard having less than <0.25EU/ml to ensure the water is of pr-requisite quality. This product is therefore pyrogen free. CFU>0 WFi compatible.

Ordering Information				
POWDERED AND LIQUID BUFFERS				
TBEP	Powdered Tris-Borate-EDTA Running Buffer – 10 sachets (1 litre / pack)			
TBE10X1L	Buffer Tris-Borate-EDTA Running Buffer, 10 x 1L	TAE50X1L	Buffer Tris-Acetate-EDTA Running Buffer, 50 x 1L	
TBE10X5	Buffer Tris-Borate-EDTA Running Buffer, 10 x 5L	TAE50X5L	Buffer Tris-Acetate-EDTA Running Buffer, 50 x 5L	
CSL-LOADDYE	10x Bromophenol Blue Loading Dye, 1ml	CSL-LOADDYE10	10x Bromophenol Blue Loading Dye, 10ml	
CSL-ORANGEDYE	Orange G Loading Dye, 1ml			
RFW250	RNase-Free Water, 1x250ml	RFW50X5	RNase-Free Water, 50x5ml	
UPW1000	BP Grade Sterile Water, 1000ml			



Cleaver Scientific CleverGEL is an environmentally friendly agarose suitable for analysis of nucleic acids using standard electrophoretic procedures. Available as standard Low EEO, High Resolution PCR grade, Low melting point and Instant agarose tablets.





CleverGEL is manufactured by a process which excludes organic solvents harmful to marine life, making it far kinder to the environment than conventional agarose. A low EEO (electroendoosmotic) flow minimises diffusion so that even the smallest of nucleic acid fragments remains sharp and tightly resolved.

Cleaver Scientific CleverGEL is an environmentally friendly agarose suitable for analysis of nucleic acids using standard electrophoretic procedures. Available as standard Low EEO, High Resolution PCR grade, Low melting point and Instant agarose tablets.

KEY FEATURES

CleverGel Low EEO agarose:

- Ideal for routine analytical electrophoresis and blotting of DNA and RNA 0.1-10Kb in size
- Low EEO
- High gel strength

CleverGel High Resolution - PCR grade:

- Ideal for routine analytical electrophoresis and blotting of DNA and RNA 0.1-10Kb in size
- High gel strength

CleverGel Low Melting Point:

- Ideal for routine analytical electrophoresis and blotting of DNA and RNA 0.1-10Kb in size
- High gel strength

CleverGel Instant Agarose Tablets:

- Ideal for routine analytical electrophoresis and blotting of DNA and RNA 0.1-10Kb in size



Instant Agarose Tablets

Technical Specifications						
	Low EEO	Low Melting Point	High Resolution	Instant Agarose		
CAS	9012-36-6	39346-81-1	39346-81-1	9012-36-6		
Gelling Point*	36°Cffl1.5°C	26-30°C	≤33°C	36°Cffl1.5°C		
Melting Point*	88°Cffl1.5°C	≤65°C	≤70°C	88°Cffl1.5°C		
Solubility	Clear, colourless @ 1% [w/v] solution	Clear, colourless @	2% [w/v] solution	Clear, colourless @ 1% [w/v] solution		
Moisture	≤10%	≤10%	≤10%	≤10%		
Gel Strength	>1200 g/cm² (1% [w/v] Gel)	>200 g/cm² (1% [w/v] Gel)	≥750 g/cm² (1.5% [w/v] Gel)	>1200 g/cm² (1% [w/v] Gel)		
Nuclease & Protease Free	Yes	Yes	Yes	Yes		
*For a 1.5% [w/v] gel						

Ordering Information				
GENERAL PURPOSE		LOW MELTING POINT		
CSL-AG5	Agarose 5g, Low EEO	CSL-LMA5	Agarose 5g, LMP	
CSL-AG100	Agarose 100g, Low EEO	CSL-LMA50	Agarose 50g, LMP	
CSL-AG500	Agarose 500g, Low EEO	CSL-LMA100	Agarose 100g, LMP	
CSL-AG1000	Agarose 1000g, Low EEO (2x500g bottles)	HIGH RESOLUTION	ON PCR-GRADE	
CSL-AG2000	Agarose 2000g, Low EEO (4x500g)	CSL-HRA5	Agarose 5g, HR	
CSL-AG5000	Agarose 5000g, Low EEO (10x500g)	CSL-HRA100	Agarose 100g, HR	
CSL-AG10KG	Agarose 10Kg, Low EEO (20x500g)	CSL-HRA500	Agarose 500g, HR	
AGAROSE TABLE	AGAROSE TABLETS			
CSL-AGTAB	Agarose 100g, Low EEO (200x 0.5g tablets, supplied as 20 blister packs of 10	Ox 0.5g tablets)		



The omniPAGE range of vertical gel electrophoresis combines ease of use with high resolution separations.

Cleaver Scientific provides a comprehensive range of vertical electrophoresis systems - complete with tanks, inserts and reagents – to fulfil a variety of applications and techniques in different gel sizes and throughputs. The omniPAGE range comprises three sizes of gel chamber, Mini 10 x 10cm, Mini Wide 20 x 10cm and WAVE Maxi 20 x 20cm. Together they share a host of common features including a guaranteed leak proof seal required for trouble free and rapid gel casting. Mini systems are compatible with a wide range of precast gels meaning you won't need to change from your gel when switching to a Cleaver tank.

High quality injection moulded construction and durable leakproof design for complete safety and longevity.

Electrical safety – lid removal immediately disconnects power to the lower buffer chamber to allow entirely safe access to the gel.

Unique sliding-clamp technology – within PAGE insert allows rapid set up of handcast and precast gels.

RUNNING MODULE DESIGN



Casting and running – dual purpose PAGE inserts eliminate time- consuming transfer of glass plates between separate casting and running modules. Cam-Pin caster locks PAGE insert onto the ultra-soft silicone mat within casting base to provide a leak-free seal.




Combs and spacers are injection moulded for consistency and 'clean' well formation.

Available in four thicknesses and colour-coded. Range from:

- Black 0.75mm for tightly resolved bands
- White 1mm supplied as standard
- Red 1.5mm to maximise sample volume
- Blue 2mm to maximise sample volume

Black and **white** combs recommended for high resolution gels and publication quality data; **red** and **blue** to scale-up volumes for preparatory techniques.






Interchangeable Modules – for PAGE and 2-D electrophoresis as well as electroblotting using a single universal buffer tank

Glass Plates – at 2mm thick for mini vertical systems and 4mm for maxi models, Cleaver Scientific plates are more durable and so provide long service lives. Available plain, notched, with or without bonded spacers.

Run up to 4 gels at a time – While most vertical gel units can run only one or two gels, omniPAGE Mini units can run one, two or up to four gels at any time using a triple glass plate sandwich.





Effective buffer cooling – a simple to use cooling pack system ensures enhanced resolution without costly and time consuming additional equipment. No chiller, tap or obstructing connecting leads are required. The cooling pack is simply pre-chilled in a freezer and placed in the gel tank. Additionally, the use of cooling packs reduces buffer volume



Vertical Gel Systems SELECTION GUIDE





AGF MINI	CVCTENA
//(_E	

- Run 1-4 handcast gels, and up to 2 precast gels in mini format
- Sliding clamp assembly ensures fast set up times and leak-free operation
- Insert for both gel casting and running eliminating time- consuming transfer of fragile gels
- Modular design for rapid turnaround of data, allowing PAGE, 2-D and blotting to be completed within a working day


OMNIPAGE MINI WIDE SYSTEM

- Mini wide format effectively allows 2 mini gels to be compared within a single gel for gel-to-gel reproducibility
- Run 1-2 handcast gels; perfect for users with >20 samples to compare and resolve
- Even pressure screw system prevents gel leakage
- Combine pl (isoelectric point) separation with speed by resolving 2x 7cm IPG strips or 2x 8cm capillary tube gels per gel using special 2-D gel combs and plates
- Ability to perform three techniques in a day: IEF, PAGE and blotting

		S
Unit Dimensions (w x l x h)	19 x 13 x 15cm	26 x 16 x 16cm
Active Gel Dimensions (w x l)	8 x 8.5cm	18 x 8cm
Sample Capacity	PAGE: 80 samples, 20/gel Blot: 4 blots 2D: 10 tubes	PAGE: 192 samples, 48/gel Blot: 4 blots 2D: 10 tubes
Tank Buffer Volume	Min 250ml; Max 1200ml	Min 600ml; Max 2800ml
Compatible Gel Formats		
Precast	Commercial 10x10cm and 10x8cm (W x H) precast gels: e.g. IDGel™, SERVA, Thermo and Invitrogen, etc.	
Handcast	OmniPAGE VS10 glass plates with or without bonded spacers for handcast gels	VS10W plain and notched glass plates with or without bonded spacers for handcast gels
Compatible Electroblotting Transfer Systems Integrated modular	OmniPAGE Mini CVS10CBS, CVS10CBS-HI and CVS10CES	OmniPAGE Mini Wide VS10WCBS and VS10WCES
Standalone Wet/tank transfer	SB10 and EBM10, 4- and 5-blot transfer systems	SB10W and EBM20, 4- and 5-blot transfer systems
Semi-dry	SD10 10x10cm and SD20 20x20cm for 1x and 4x blots	SD20 20x20cm for 2x blots
Electrophoresis System		
• Standard	2-gel systems (can run 4 gels)	2-gel system (can run 4 gels)
Precast (tank, lid and running insert only)	CVS10PRE	
Tapecast (includes glass plates)	CVS10D	VS10WD
Handcast (with glass plates and caster)	CVS10DSYS	VS10WDSYS
(with extra casting stand and plates to run 2 gels in tank, while casting 2 simultaneously)	CVS10DSYS-CU	VS10WDSYS-CU







VS20WAVE MAXI SYSTEM	VS30 MAXI-PLUS SYSTEM
 Runs 1-4 large format gels at maximum resolution Fewer screws compared to traditional formats resulting in rapid set up times Optional blotting insert Detachable cooling core for fast, smile-free electrophoresis Seamless injection moulded construction free of potential leakage-prone glue joins Capacity to run 1-4 18cm capillary tube gels or IPG strips in second dimension; optional 2-D module 	 Ideal for second-dimension electrophoresis Accepts IPG strips 24cm in length, the longest available commercially Rapid set-up cool packs enhance resolution, particularly during extended runs
30 x 18 x 27cm	36 x 33 x 18cm
16 x 17.5cm	28 x 20cm
PAGE: 192 samples, 48/gel Blot: 4x WAVE gels 2D: 10 tubes	PAGE: 300 samples, 75/gel Blot: 4 x Maxi Plus gels
Min 1200ml; Max 5300ml	Min 1800ml: Max 8400ml
VS20 plain and notched glass plates with or without bonded spacers for handcast gels	VS30 plain and notched glass plates with or without bonded spacers for handcast gels
Maxi WAVE VS20CBS, VVS20CBS-HI and VS20WAVECES	Maxi Plus VS30CBS
SB20 and EBM20, 4- and 5-blot transfer systems	
SD20 20x20cm	SD33 33x45cm, and SD50 20x50cm *
2-gel system (can run 4 gels)	2-gel system (can run 4 gels)
VS20WAVED	VS30D
VS20WAVESYS	VS30DSYS
VS20WAVESYS-CU	






The perfect unit for routine vertical electrophoresis using pre-cast or hand-cast gels. The omniPAGE MINI features injection moulded construction for leak proof running, and a simple clamp system to ensure a tight seal between buffer chambers to prevent current leakage.

Gel casting and running is done using the same internal module, no transfer of glass plates during gel casting is necessary. The module features unique sliding gates, to allow very rapid set up of both hand cast and precast gels. Ultra soft silicone seals and pressure bars which surround the glass plates guarantee leak proof gel casting. 2mm thick glass plates minimise breakage and have bonded spacers for convenience.

MINITETRAD

A 4-gel TETRAD system is created by simply introducing additional plates with spacers and appropriate combs. TETRAD is supplied with a casting base and external casting upstand to allow gels to be prepared in advance, ready for the next run.

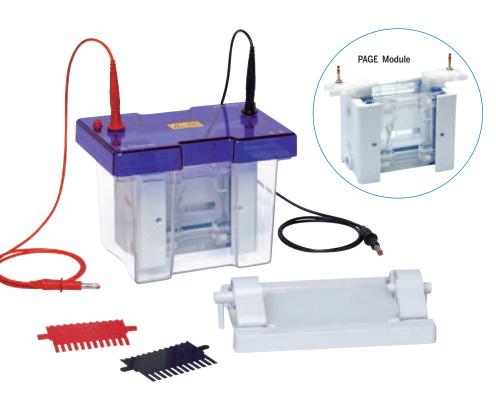

interchangeable modules

Electroblotting Module – Complete with Platinum wire electrodes, 4 blotting cassettes and fibre pads to aid compression, this insert fits neatly into the omniPAGE Minitank for Western Blotting.



High Intensity Electroblotting Module – with 2 blotting cassettes and Platinum plate electrodes, the high intensity blotting module allows fast transfer of proteins to membranes with excellent time savings.

Capillary IEF Module - the Tube Gel Module includes a rapid release gasket for easy tube extraction. Focusing can be accomplished in as little as three hours.



Mini SDS PAGE, Native PAGE, Gradient, Second dimension and Nucleic acid separations

- Injection moulded construction
- Compatible with all 8 x 10 and 10 x 10cm precast gels
- Rapid gel casting and loading
- Low buffer volumes
- Rapid set up cooling
- Run up to four gels in tetrad model



For Vertical Package Deals

ORDERING INF	ORMATION				
CVS10D	omniPAGE Mini, 10 x 10cm includes Glass Plates with bonded 1mm thick spacers, 2x 12 sample combs, cooling pack, blanking plate				
CVS10DSYS	omniPAGE Mini, 10 x 10cm includes Glass Plates with bonded 1mm thick spacers, 2x 12 sample combs, cooling pack, blanking plate and casting base				
CVS10DSYS-CU	omniPAGE Mini, 10 x 10cm incl. Glass Plates with bonded 1mm thick spacers, 2x 12 sample combs, cooling pack, blanking plate, casting base and casting upstand				
CVS10TETRAD	omniPAGE Mini, 10 x 10cm incl. Glass Plates with bonded 1mm thick spacers, 2	2x 12 sample comb	s, cooling pack, blanking plate, casting base and casting upstand PLUS 2x		
	additional 1mm 12-sample combs, 1x pk/2 plain glass plates with 1mm spacers	, 1x pk/2 notched	glass plates and 2x pk/2 notched glass plates with 1mm spacers		
CVS10PRE	omniPAGE Mini, 10 x 10cm includes blanking plate, cooling pack				
VS10DCAST	10 x 10cm Casting Base	VS10NGS1.5	10 x 10cm Notched Glass Plates with 1.5mm Bonded Spacers (pk/2)		
VS10DCASTM	Replacement Silicone Mat for 10 x 10cm Casting Base	VS10PGS1.5	10 x 10cm Plain Glass Plates with 1.5mm Bonded Spacers (pk/2)		
CVS10DIRM	Inner Running Module, with Sliding Clamps or Screw Clamps	VS10NGS2	10 x 10cm Notched Glass Plates with 2mm Bonded Spacers (pk/2)		
VS10ICB	Mini Cooling Pack	VS10PGS2	10 x 10cm Plain Glass Plates with 2mm Bonded Spacers (pk/2)		
VS10NG	10 x 10cm Notched Glass Plates 2mm thick (pk/2)	VS10DP	Blanking Plate, 10 x 10cm		
VS10PG	10 x 10cm Plain Glass Plates 2mm thick (pk/2)	VS10S0.75	10cm Spacers - 0.75mm (pk/2)		
VS10NGS0.75	10 x 10cm Notched Glass Plates with 0.75mm Bonded Spacers (pk/2)	VS10S1	10cm Spacers - 1mm thick (pk/2)		
VS10PGS0.75	10 x 10cm Plain Glass Plates with 0.75mm Bonded Spacers (pk/2)	VS10S1.5	10cm Spacers - 1.5mm thick (pk/2)		
VS10NGS1	10 x 10cm Notched Glass Plates with 1mm Bonded Spacers (pk/2)	VS10S2	10cm Spacers - 2mm thick (pk/2)		
VS10PGS1	10 x 10cm Plain Glass Plates with 1mm Bonded Spacers (pk/2)				



simple, rapid, leak-proof gel casting....

Dual purpose PAGE module eliminates time-consuming transfer of glass plates between separate casting and running

Ground glass plates with bonded injection moulded spacers consistent with comb thickness ensure 'clean' well formation, as well as the correct alignment for leak-free casting; also eliminate the need for easily mislaid and awkward to use spacer aligners

Very forgiving, ultra-soft silicone mat within cam-caster compensates for glass plate misalignment to ensure leak-free casting



Insert glass plates between pressure frame and gasket



Slide gates to make efficient seal



Transfer to casting base and tighten cams




Insert gel solution and comb and allow to polymerise




Transfer to tank and fill with



Load samples using Loading Guides and run



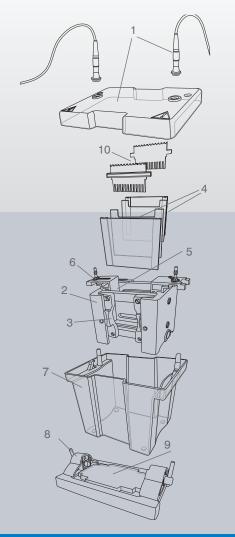


Mini component parts

Lid and power cables
 PAGE insert
 Outer tank
 Sliding clamps
 Gasset
 Cam-pin caster
 Glass plates
 Ultra-soft casting mat
 Inner buffer chamber
 Combs

Colour	CODE	DESCRIPTION	Sample Volume per well	Colour	CODE	DESCRIPTION	Sample Volume PER WELL
	VS10-1-0.75	Comb 1 Prep, 1 Marker, 0.75mm thick	500µІ		VS10-1-1.5	Comb 1 Prep, 1 Marker, 1.5mm thick	1000μΙ
	VS10-5-0.75	Comb 5 sample, 0.75mm thick	70µІ		VS10-5-1.5	Comb 5 sample, 1.5mm thick	140µІ
	VS10-8MC-0.75	Comb 8 sample MC, 0.75mm thick	40µl		VS10-8MC-1.5	Comb 8 sample MC, 1.5mm thick	80µl
	VS10-9-0.75	Comb 9 sample, 0.75mm thick	35µІ		VS10-9-1.5	Comb 9 sample, 1.5mm thick	70µІ
	VS10-10-0.75	Comb 10 sample, 0.75mm thick	30µІ		VS10-10-1.5	Comb 10 sample, 1.5mm thick	30µl
	VS10-12-0.75	Comb 12 sample, 0.75mm thick	25µІ		VS10-12-1.5	Comb 12 sample, 1.5mm thick	50µl
	VS10-16MC-0.75	Comb 16 sample MC, 0.75mm thick	20µІ		VS10-16MC-1.5	Comb 16 sample MC, 1.5mm thick	40µl
	VS10-20-0.75	Comb 20 sample, 0.75mm thick	15μΙ		VS10-20-1.5	Comb 20 sample, 1.5mm thick	30µІ
	VS10-1-1	Comb 1 Prep, 1 Marker, 1mm thick	650µІ		VS10-1-2	Comb 1 Prep, 1 Marker, 2mm thick	1300µl
	VS10-5-1	Comb 5 sample, 1mm thick	100µl		VS10-5-2	Comb 5 sample, 2mm thick	200μΙ
	VS10-8MC-1	Comb 8 sample MC, 1mm thick	60µІ		VS10-8MC-2	Comb 8 sample MC, 2mm thick	120µІ
	VS10-9-1	Comb 9 sample, 1mm thick	50µІ		VS10-9-2	Comb 9 sample, 2mm thick	100μΙ
	VS10-10-1	Comb 10 sample, 1mm thick	40µl		VS10-10-2	Comb 10 sample, 2mm thick	80µl
	VS10-12-1	Comb 12 sample, 1mm thick	35µІ		VS10-12-2	Comb 12 sample, 2mm thick	70µl
	VS10-16MC-1	Comb 16 sample MC, 1mm thick	25µІ		VS10-16MC-2	Comb 16 sample MC, 2mm thick	50µl
	VS10-20-1	Comb 20 sample, 1mm thick	20µl		VS10-20-2	Comb 20 sample, 2mm thick	40μΙ



The omniPAGE range of Modular Vertical Gel Systems allow multiple electrophoresis techniques to be performed in the same unit. Using the same main tank and lid, three different modules are interchangeable for PAGE, tube gel and electroblotting techniques.

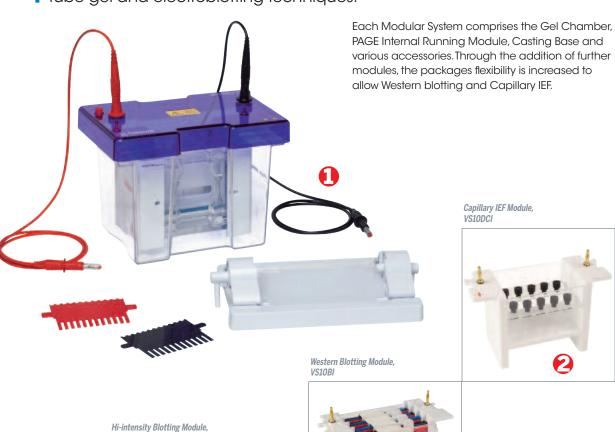

PAGE Internal Running Module, Casting Base and various accessories. Through the addition of further modules, the packages flexibility is increased to allow Western blotting and Capillary IEF.

Capillary IEF Module, VS10DCI







Hi-intensity Blotting Module, VS10BI-HI





ORDERING IN	FORWATION
CVS10CES	Complete Mini (10x10cm) Vertical Electrophoresis Modular System, comprising:
	1x Mini Vertical Unit, CVS10DSYS (1) which includes: PAGE Module, 2x2mm thick notched glass plates, 2x2mm thick plain glass pl
	spacers, 1x blanking plate, 2x combs (1mm thick, 12 samples), 1x casting base, silicone mat, cooling pack plus: 1x Capillary Electronic

plates with 1mm thick bonded rophoresis Module, VS10DCI (2) and 1x Electroblotting Module, VS10BI (3) comprising: internal electroblotting module, 4x compression cassettes for gel sizes up to 10x10cm and 8x fibre pads

CVS10C2DS Complete Mini (10 x 10cm) Vertical Electrophoresis & 2-D System, comprising:

> 1x Mini Vertical Unit, CVS10DSYS (1) which includes: PAGE Module, 2x2mm thick notched glass plates, 2x2mm thick plain glass plates with 1mm thick bonded spacers, 1x blanking plate, 2x combs (1mm thick, 12 samples), 1x casting base, silicone mat, cooling pack plus: 1x Capillary Electrophoresis Module, VS10DCI (2)

CVS10CBS Complete Mini (10 x 10cm) Vertical Electrophoresis & Blotting System, comprising:

1x Mini Vertical Unit, CVS10DSYS (1) which includes: PAGE Module, 2x2mm thick notched glass plates, 2x2mm thick plain glass plates with 1mm thick bonded spacers, 1x blanking plate, 2x combs (1mm thick, 12 samples), 1x casting base, silicone mat, cooling pack plus 1x Standard Electroblotting Module, VS10BI (3)

CVS10CBS-HI Complete Mini (10 x 10cm) Vertical Electrophoresis & High Intensity Blotting System, comprising:

> 1x Mini Vertical Unit, CVS10DSYS (1) which includes: PAGE Module, 2x2mm thick notched glass plates, 2x2mm thick plain glass plates with 1mm thick bonded spacers, 1x blanking plate, 2x combs (1mm thick, 12 samples), 1x casting base, silicone mat, cooling pack plus: 1x High Intensity Electroblotting Module, VS10BI-HI (4) omniPAGE Mini Tube Unit (2) VS10BI-HI High Intensity omniPAGE Blot Mini insert - includes 2 casettes and 8 fibre pads (4)

VS10BI OmniBlot Mini Insert - including 4 cassettes, 16 foam pads (3)


VS10DCI





PAGE Mini Modular Systems

Mini wide vertical gel unit, with a gel width of 20cm, effectively allows double the number of samples to be resolved as the mini unit. This allows consistency of sample comparison on a single gel and is designed for those with greater than 20 samples to compare and resolve. Simple set up using ultra soft silicone seals guarantees trouble free glass plate loading and gel casting.

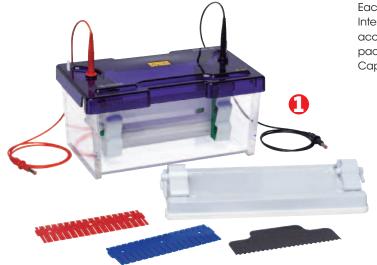

Each Modular System comprises the Gel Chamber, PAGE Internal Running Module, Casting Base and various accessories. Through the addition of further modules, the packages flexibility is increased to allow Western blotting and Capillary IEF.



Capillary IEF Module, VS10WDCI



Western Blotting Module, VS10WBI

ACCESSORIES



Glass Plates with Combs Cool Packs **Bonded Spacers**

ORD	ERING	INFOR	MATION

ORDERING IN	FORMATION			
VS10WD	$\textbf{Mini Wide, 20 x 10cm Dual}, 2 \ sets \ of \ Glass \ Plates \ with \ 1mm \ thick \ bonded$	Spacers, 2 x 24 s	ample, 1mm thick combs, cooling pack	
VS10WDSYS	Mini Wide, 20 x 10cm Dual, 2 sets of Glass Plates with 1mm thick bonded	Spacers, 2 x 24 s	ample, 1mm thick combs, cooling pack including caster	
VS20CAST	20 x 10cm Casting Base	VS10WNGS1	20 x 10cm Notched Glass Plates with 1mm Bonded Spacers (pk/2)	
VS20DCASTM	Replacement Silicone Mat for 20 x 10cm Casting Base	VS10WPGS1	20 x 10cm Plain Glass Plates with 1mm Bonded Spacers (pk/2)	
VS10WDIRM	Inner Running Module	VS10WPGS1.5	20 x 10cm Plain Glass Plates with 1.5mm Bonded Spacers (pk/2)	
VS20-x -LG	Loading guides for RigRunner V-MINI combs, x = comb well number	VS10WPGS2	20 x 10cm Plain Glass Plates with 2mm Bonded Spacers (pk/2)	
VS10WNG	20 x 10cm Notched Glass Plates 4mm thick (pk/2)	VS10WDP	Blanking Plate, 20 x 10cm	
VS10WPG	20 x 10cm Plain Glass Plates 4mm thick (pk/2)	RPW-0.2100	Replacement Platinum Wire - 0.2mm, 50cm	
	20 x 10cm Notched Glass Plates with 0.75mm Bonded Spacers (pk/2)	VS20ICB	Cooling Pack	
VS10WPGS0.75	20 x 10cm Plain Glass Plates with 0.75mm Bonded Spacers (pk/2)			
SB10W	Mini Wide Blot Unit, 20 x 10cm System including tank and lid,	VS10WDC	Mini Wide Tube Gel Unit, 20x10cm with tank and lid,	
	4 cassettes, 8 fibre pads, cooling pack		glass capillary tubes, blanking ports and cooling pack	
VS10WBI	Mini Wide Blot Module - includes 4 cassettes and 8 fibre pads	VS10WDCI	Mini Wide Tube Gel Module - includes glass tubes and blanking ports	
SB10WC	Mini Wide Blot Cassette	MCT10	Mini Capillary Tubes, pk/100	
SB10WF	Fibre pads - pk/8	MCT101.5	Mini Capillary Tubes, 1.5mm, pk/100	
VS10WCES	Complete Mini Wide (20x10cm) Vertical Electrophoresis Modular System,	comprising:		
	1x Mini Wide Vertical Unit, VS10WDSYS (1) which includes: PAGE Module,	2x4mm thick no	tched glass plates, 2x4mm thick plain glass plates with 1mm thick	
	bonded spacers, 1x blanking plate, 2x combs (1mm thick, 24 samples), 1	x casting base, si	licone mat, cooling pack	
	plus: 1x Wide Electroblotting Module, VS10WBI (3) 1x Wide Capillary Elec	trophoresis Mod	ule, VS10WDCI (2)	
VS10WCBS	Complete Mini Wide (20 x 10cm) Vertical Electrophoresis & Blotting System	m , comprising:		
	1x Mini Wide Vertical Unit, VS10WDSYS (1) which includes: 2x4mm thick r	notched glass pla	tes, 2x4mm thick plain glass plates with 1mm thick bonded spacers,	
	1x blanking plate, 2x combs (1mm thick, 24 samples), 1x casting base, silicone mat, cooling pack plus: 1x Wide Electroblotting Module, VS10WBI (3)			
VS10WC2DS	Complete Mini Wide (20x10cm) 2-D System, comprising:			
	1x Mini Wide Vertical Unit, VS10WDSYS (1) which includes: 2x4mm thick r	notched glass pla	tes, 2x4mm thick plain glass plates with 1mm thick bonded spacers,	
	1x blanking plate, 2x combs (1mm thick, 24 samples), 1x casting base, si	licone mat, coolir	ng pack plus: 1x Wide Capillary Electrophoresis Module, VS10WDCI (3)	





The Maxi 'WAVE' System is designed to perform a variety of separations, including first- and second-dimension SDS-PAGE, native, preparative, gradient and high-resolution nucleic acid electrophoresis, plus capillary tube gel IEF and electroblotting, the Maxi WAVE is one of the most versatile maxi vertical systems available.

The innovative, vertical screw-clamp system within the PAGE insert requires only four screws to secure up to four 20x20cm gels. This gives the Maxi WAVE the advantage of a much faster set up time compared to products whose traditional clamping configurations require as many as 24 screws to secure just two glass plates. In addition, the WAVE's innovative vertical screw-clamp configuration distributes pressure evenly along the height of the gel rather than in the centre to eliminate plate bowing and gel compression. This still maintains a leak-proof seal during casting; while the ergonomic wave-like design of the PAGE insert aids both handling and set up.

A detachable inner cooling coil connects to the laboratory water supply or a recirculating chiller to provide uniform, smile-free electrophoresis, while allowing runs to be performed at higher voltage.

MAXI WAVE TETRAD

A 4-gel TETRAD system is created by simply introducing additional plates with spacers and appropriate combs. TETRAD is supplied with a casting base and external casting upstand to allow gels to be prepared in advance, ready for the next run.

KEY FEATURES

- Run up to FOUR gels simultaneously [TETRAD systems1
- Only four screws required to secure glass plates significantly reduces set up time
- Vertical screw-clamps distribute pressure evenly along the height of the gel to prevent plate bowing and gel compression
- Detachable inner cooling coil facilitates rapid and uniform, smile-free electrophoresis, even at
- Injection moulded construction guarantees long life with reliable and consistent performance



External Casting Upstand is basically a standard internal module but without Platinum wire

ORDERING INFORMATION



VS20WAVESYS	Maxi WAVE, 20 x 20cm Dual with Glass Plates with bonded 1mm thick spacers, 2x 24 sample combs, cooling pack, dummy plate and casting base
VS20WAVESYS-CU	Maxi WAVE, 20 x 20cm Dual with Glass Plates with bonded 1mm thick spacers, 2x 24 sample combs, cooling pack, dummy plate, casting base
	and external casting upstand

VS20WAVETETRAD1 Maxi WAVE, 20 x 20cm Dual with Glass Plates with bonded 1mm thick spacers, 2x 24 sample combs, cooling pack, dummy plate, casting base

and external casting upstand, PLUS $2x$ pks/ 2 notched glass plates with $1mm$ bonded spacers and $2x$ $1mm$ 24 -sample combs				
VS20WAVE-EC	VS20 WAVE External Casting Stand - No Casting Base	VS20PGS1	20 x 20cm Plain Glass Plates with 1mm Bonded Spacers (pk/2)	
VS20WAVEDIRM	VS20WAVE Page insert	VS20PGS1.5	20 x 20cm Plain Glass Plates with 1.5mm Bonded Spacers (pk/2)	
VS20WAVE-CC	Detachable Cooling Coil	VS20PGS2	20 x 20cm Plain Glass Plates with 2mm Bonded Spacers (pk/2)	
VS20DCAST	V-Maxi WAVE, 20 x 20cm Dual Caster	VS20DP	Dummy Plate, 20 x 20cm	
VS20DCASTM	Replacement Rubber mats for 20 x 20cm caster	VS20S0.75	20cm Spacers - 0.75mm (pk/2)	
VS20ICB	Maxi Cooling Pack	VS20S1	20cm Spacers - 1mm thick (pk/2)	
VS20-x -LG	Loading guides for V-Maxi WAVE maxi combs, x = comb well number	VS20S1.5	20cm Spacers - 1.5mm thick (pk/2)	
VS20NG	20 x 20cm Notched Glass Plates 4mm thick (pk/2)	VS20S2	20cm Spacers - 2mm thick (pk/2)	
VS20PG	20 x 20cm Plain Glass Plates 4mm thick (pk/2)	VS20WAVE-IEFKIT	IEF Conversion for 18cm IPG strips and tube gels, includes: 1 set of	
VS20NGS0.75	20 x 20cm Notched Glass Plates with 0.75mm Bonded Spacers (pk/2)		plain glass plates with bonded spacers, 0.6x20cm (WxH); and 2x 2-D	
VS20PGS0.75	20 x 20cm Plain Glass Plates with 0.75mm Bonded Spacers (pk/2)		combs with one 3.5mm marker lane and one 18cm preparatory well	
VS20NGS1	20 x 20cm Notched Glass Plates with 1mm Bonded Spacers (pk/2)			



Gel Casting

Dual purpose PAGE insert eliminates time-consuming transfer of glass plates between separate casting and running modules

Ground glass plates with bonded injection moulded spacers consistent with comb thickness ensure 'clean' well formation, as well as the correct alignment for leak-free casting; also eliminate the need for easily mislaid and awkward to use spacer aligners

Very forgiving, ultra-soft silicone mat within cam-caster compensates for glass plate misalignment to ensure leak-free casting



Assemble each gel cassette on a flat level surface, by placing the plain glass plate down with the spacers facing upwards followed by the notched glass plate.



Loosen the vertical screwpins in the PAGE insert to release the locking mechanism, allowing the gel clamps to sit in the resting slots.



Insert a gel cassette into each side of the inner buffer chamber in the PAGE insert, and begin tightening the vertical screw-pins.




Continue to tighten the screw-pins until the gel clamps glide out of the resting slots and fix firmly against the glass plates pushing them upright.



Check the bottom of the glass plates to ensure that they are flush together, and place the PAGE insert on the casting base; make sure that the cams are facing downwards.



Insert cams and turn until tight, drawing the PAGE insert onto the casting to form a leak-proof seal.






Pour in the gel solution, insert the combs and allow the wells to



Transfer the PAGE insert to gel the tank. Fill the inner and outer buffer chambers before loading samples.



Replace the lid, connect to the power supply and run.

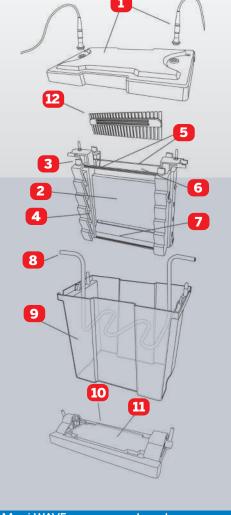

Maxi WAVE component parts

1. Lid and power cables 7. Gasket

2. PAGE insert 8. Detachable cooling coil

3. Vertical screw-pin 9. Outer tank

4. Clamping bars 10.Cam-pin caster

5. Glass plates 11. Ultra-soft casting mat


6. Inner buffer chamber 12.Combs

Colour	CODE	Description	SAMPLE VOLUME PER WELL	Colour	CODE	DESCRIPTION	SAMPLE VOLUME PER WELL
	VS20-1-0.75	Comb 1 Prep, 1 Marker, 0.75mm thick	1100μΙ		VS20-1-1.5	Comb 1 Prep, 1 Marker, 1.5mm thick	2200µl
	VS20-5-0.75	Comb 5 sample, 0.75mm thick	160µl		VS20-5-1.5	Comb 5 sample, 1.5mm thick	320µl
	VS20-10-0.75	Comb 10 sample, 0.75mm thick	80µl		VS20-10-1.5	Comb 10 sample, 1.5mm thick	160µl
	VS20-18MC-0.75	Comb 18 sample MC, 0.75mm thick	40µl		VS20-18MC-1.5	Comb 18 sample MC, 1.5mm thick	80µl
	VS20-24-0.75	Comb 24 sample, 0.75mm thick	30µl		VS20-24-1.5	Comb 24 sample, 1.5mm thick	60µl
	VS20-30-0.75	Comb 30 sample, 0.75mm thick	25µl		VS20-30-1.5	Comb 30 sample, 1.5mm thick	50μΙ
	VS20-36MC-0.75	Comb 36 sample MC, 0.75mm thick	20µl		VS20-36MC-1.5	Comb 36 sample MC, 1.5mm thick	40µl
	VS20-48-0.75	Comb 48 sample, 0.75mm thick	15µl		VS20-48-1.5	Comb 48 sample, 1.5mm thick	30µl
	VS20-1-1	Comb 1 Prep, 1 Marker, 1mm thick	1500µl		VS20-1-2	Comb 1 Prep, 1 Marker, 2mm thick	3000µl
	VS20-5-1	Comb 5 sample, 1mm thick	200µl		VS20-5-2	Comb 5 sample, 2mm thick	400µl
	VS20-10-1	Comb 10 sample, 1mm thick	100µl		VS20-10-2	Comb 10 sample, 2mm thick	200µl
	VS20-18MC-1	Comb 18 sample MC, 1mm thick	50µl		VS20-18MC-2	Comb 18 sample MC, 2mm thick	100µl
	VS20-24-1	Comb 24 sample, 1mm thick	40µl		VS20-24-2	Comb 24 sample, 2mm thick	80µl
	VS20-30-1	Comb 30 sample, 1mm thick	35µl		VS20-30-2	Comb 30 sample, 2mm thick	70µl
	VS20-36MC-1	Comb 36 sample MC, 1mm thick	25µl		VS20-36MC-2	Comb 36 sample MC, 2mm thick	50µl
	VS20-48-1	Comb 48 sample, 1mm thick	20µl		VS20-48-2	Comb 48 sample, 2mm thick	40μΙ





The omniPAGE range of Modular Vertical Gel Systems allow multiple electrophoresis techniques to be performed in the same unit. Using the same main tank and lid, three different inserts are interchangeable for PAGE, tube gel and electroblotting techniques.



Each Modular System comprises the Gel Chamber, PAGE Internal Running Module, Casting Base and various accessories. Through the addition of further modules, the packages flexibility is increased to allow Western blotting and Capillary IEF.

Capillary IEF Module VS20DCI



ACCESSORIES



Cool Packs

Hi-Intensity Blotting Module, SW20BI-HI





Western Blotting Module, VS20BI

ORDERING INFORMATION

VS20CES Complete Maxi WAVE (20x20cm) Vertical Electrophoresis Modular System, comprising:

1x Maxi WAVE Vertical Unit, VS20WAVESYS (1) which includes: 2x4mm thick notched glass plates, 2x4mm thick plain glass plates with 1mm thick bonded spacers, 1x blanking plate, 2x combs (1mm thick, 24 samples), 1x casting base, silicone mat, cooling pack

plus: 1x Electroblotting Module, VS20BI (3) comprising: internal electroblotting module, 4x compression cassettes for gel sizes up to 20x20cm and 18x fibre pads plus: 1x Capillary Electrophoresis Module, VS20DCI (2) which includes: internal running module for tube gels, capillary tubes, blanking plugs and 1x VS20WAVE IEF-KIT: 1 set of plain glass plates with bonded spacers, 0.6x20cm (WxH); and 2x 2-D combs with one 3.5mm marker lane and one 18cm preparatory well

VS20C2DS Complete Maxi WAVE 2-D System, comprising:

1x Maxi WAVE Vertical Unit, VS20WAVESYS (1) which includes: 2x4mm thick notched glass plates, 2x4mm thick plain glass plates with 1mm thick bonded spacers, 1x blanking plate, 2x combs (1mm thick 24 samples), 1x casting base, silicone mat, cooling pack

plus: 1x Capillary Electrophoresis Module, VS20DCI (2) which includes: internal running module for tube gels, capillary tubes, blanking plugs and 1x VS20WAVE-IEF-KIT: 1 set of plain glass plates with bonded spacers, 0.6x20cm (WxH); and 2x 2-D combs with one 3.5mm marker lane and one 18cm preparatory well

VS20CBS Complete Maxi WAVE (20 x 20cm) Vertical Electrophoresis & Blotting System, comprising:

1x Maxi WAVE Vertical Unit, VS20WAVESYS (1) which includes: 2x4mm thick notched glass plates, 2x4mm thick plain glass plates with 1mm thick bonded spacers, 1x blanking plate, 2x combs (1mm thick, 24 samples), 1x casting base, silicone mat, cooling pack

plus: 1x Electroblotting Module, VS20BI (3) comprising: internal electroblotting module, 4x compression cassettes for gel sizes up to 20x20cm and 6x fibre pads

VS20CBS-HI Complete Maxi WAVE (20 x 20cm) Vertical Electrophoresis & High Intensity Blotting System, comprising:

1x Maxi WAVE Vertical Unit, VS20WAVESYS (1) which includes: 2x4mm thick notched glass plates, 2x4mm thick plain glass plates with 1mm thick bonded spacers, 1x blanking plate, 2x combs (1mm thick, 24 samples), 1x casting base, silicone mat, cooling pack, plus: 1x High Intensity Electroblotting Module, SB20BI-HI (4) which includes: internal electroblotting module, 2x compression cassettes for gel sizes up to 20x20cm and 6x fibre pads






omniPAGE Vertical Gel Chambers can accommodate a wide variety of casting combs. Standard options are shown below, while custom combs can be manufactured on request. To select a comb, just add the desired thickness to the end of the comb code to get the complete ordering code, for example, VS10-4-1 is a 1 mm thick comb and VS20-24-1.5 is a 1.5 mm comb. Well volume shown below is for 1mm thick combs, except for Sharks Tooth combs which are 0.25mm. For volume of other thicknesses, please refer to the Cleaver Scientific website.

Colour-coded combs for the multiSUB are available in 4 thicknesses,

Black – 0.75mm for tightly resolved bands White – 1mm supplied as standard Red – 1.5mm to maximise sample volume Blue – 2mm to maximise sample volume

Black and white combs recommended for high resolution gels and publication quality data; red and blue to scale-up nucleic acid volumes for preparatory techniques.

NOTE: Volume refers to maximum well volume of the longer tooth

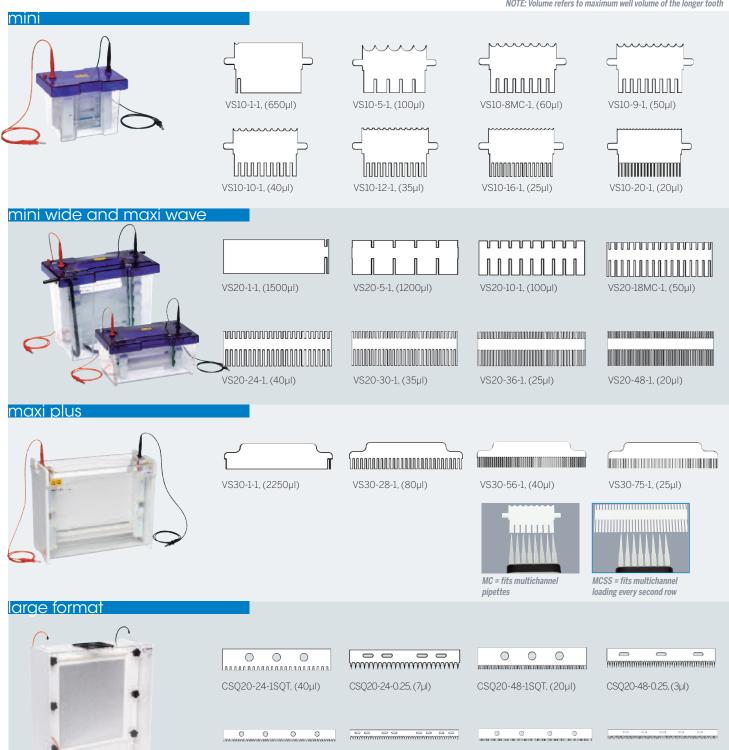

CSQ33-48-0.25, (7µI)

CSQ233-80-1SQT, (20µl)

CSQ33-96-0.25, (3µI)

CSQ33-48-1SQT, (35µI)



Ideal for Caesium, Sucrose and Gel gradients the Gradient Mixer series comprises two chambers - a reservoir and a mixing chamber with an interconnecting valve. A second valve regulates the output flow from the mixing chamber. All mixers have a flat base which allows them to be placed on a magnetic stirrer. A magnetic stirring bar can be placed directly in the mixing chamber to ensure a constant gradient. The support rod allows the mixer to be fixed to a retort stand for extra stability.




Multiple Gel Casters

Advance casting of multiple mini and maxi gels can help to achieve consistent results between runs. These multiple gel casting systems are tailored for use with omniPAGE mini and omniPAGE maxi vertical electrophoresis units; with three models of 6, 12 and 24 gel capacities. Fewer gels can be poured if required using the acrylic saver blocks supplied with each system.

The fixed hinged clamps allows the gel sandwich to be adjusted to the correct pressure irrespective of the number or the thickness of gels being poured. Separation sheets allow the easy separation of the glass plates after pouring.



gel loading tips



microcapillary

These Gel-Loading Pipette Tips are designed for sample loading of electrophoresis gels. They provide positive-displacement accuracy and reproducibility using Pipetman and most other single channel air-displacement pipettors.

RNase/DNase-free Tips comprise three styles, each featuring a flexible, 33mm long, 5µl microcapillary tube sections:

- Round-shaff Tip, with 0.57mm OD tube endthese greatly improve loading techniques for 0.75, 1.0 and 1.5mm PAGE aels.
- Intermediate 0.37mm OD flat Tip is ideal for loading 0.4mm sequencing gels.
- Ultra-thin 0.17mm OD ultra-flat Tip is perfect for loading 0.2mm wedge-spacer gels.

- Two styles Round or Flat (Duckbill)
- 'Unifit' design provides tight seal
- Complete visibility of sub-microlitre volumes - 200µl models (83mm) at 5µl; 2µl/10µl models at 2µl
- For use with 2, 10, 20, 100 and 200µl pipettes
- Metal and RNase free



ORDERING	NFORMATION				
GRADIENT MIX	KERS				
CSL-GM15	15ml Gradient Mixer		CSL-GM100	100ml Gradient Mixer	
CSL-GM25	25ml Gradient Mixer		CSL-GM500	500ml Gradient Mixer	
CSL-GM50	50ml Gradient Mixer				
MULTI VERTIC	AL GEL CASTERS				
CSL-6CAST	6 gel caster for 8 x 10cm or 10 x 10cm mini gels		CSL-12CAST	12 gel caster for 8 x 10cm or 10 x 10cm mini gels	
GEL LOADING 1	TIPS	Packaging	GEL LOADING	TIPS	Packaging
P-3210	Round Orifice, 0.2-10µl, 0.5mm diam.	Case = 4x rack/200	P-3107	Round Orifice, 20-200µl, 1.1mm diam.	Case = 5x rack/200
P-3212	Flat Orifice, 0.2-10µl, 0. 33mm diam.	Case = 4x rack/200	P-3080	Round Orifice, 20-200µl, 0.5mm diam.	Case = 4x rack/200
P-3214	UftraFlat Orifice, 0.2-10µl, 0.17mm diam.	Case = 4x rack/200	P-3082	Flat Orifice, 20-200µl, 0. 33mm diam.	Case = 4x rack/200

omnipage Maxi Plus




The Maxi Plus unit provides a convenient solution for the second stage of 2-D electrophoresis.

The 26cm active gel width provides a large gel area to resolve large IEF strips. In combination with the IEF system above, this offers a complete package for 2-D electrophoresis. The unit utilises the omniPAGE advanced design features to provide convenient ease of use with high resolution separations.

Rapid set up cooling retains resolution in extended separations and also saves on buffer volume without affecting run quality. Four gels can be resolved per run. A wide range of accessories is available to allow easy transition between 2-D and standard vertical electrophoresis techniques. In particular different types of 2-D comb allow a wide degree of versatility in sample selection and gel set-up.

- Ideal for second dimension electrophoresis
- Accepts strips up to 26cm in length
- Rapid set up coolpacks for enhanced resolution





Western Blotting Module, VS30BI

Ordering In	Ordering Information					
VS30D	omniPAGE MAXIPLUS, 30 x 22cm Dual with Glass Plates with bonded 1.5mm spacers, 2 x 28 sample combs, 2 x 2-D combs, cooling pack, blanking plate					
VS30DSYS	omniPAGE MAXIPLUS, as above with Casting Base	VS30PGS0.75	30 x 22cm Plain Glass Plates with 0.75mm Bonded Spacers (pk/2)			
VS30BI	omniPAGE MAXI Blot Plus Module - includes 4 cassettes and 8 fibre pads	VS30NGS1	30 x 22cm Notched Glass Plates with 1mm Bonded Spacers (pk/2)			
VS30DCAST	30 x 22cm Dual Casting Base	VS30PGS1	30 x 22cm Plain Glass Plates with 1mm Bonded Spacers (pk/2)			
VS30DCASTM	Replacement Silicone Mat for 30 x 22cm Casting Base	VS30PGS1.5	30 x 22cm Plain Glass Plates with 1.5mm Bonded Spacers (pk/2)			
VS30DIRM	Inner Running Module	VS30PGS2	30 x 22cm Plain Glass Plates with 2mm Bonded Spacers (pk/2)			
VS30ICB	Maxi Cooling Pack	VS30DP	Blanking Plate, 30 x 22cm			
VS30-x-LG	Loading guides for omniPAGE MAXI combs, x = comb well number	VS30S0.75	22cm Spacers - 0.75mm (pk/2) MC = multichannel pipette compatible			
VS30NG	30 x 22cm Notched Glass Plates 4mm thick (pk/2)	VS30S1	22cm Spacers - 1mm thick (pk/2)			
VS30PG	30 x 22cm Plain Glass Plates 4mm thick (pk/2)	VS30S1.5	22cm Spacers - 1.5mm thick (pk/2)			
VS30NGS0.75	30 x 22cm Notched Glass Plates with 0.75mm Bonded Spacers (pk/2)	VS30S2	22cm Spacers - 2mm thick (pk/2)			

CODE	DESCRIPTION	SAMPLE VOLUME PER WELL	Colour Code	DESCRIPTION	SAMPLE VOLUME PER WELL
□ VS30-1-1	Comb 1 Prep, 1 Marker, 1mm thick	2250µl	VS30-1-1.5	Comb 1 Prep, 1 Marker, 1.5mm thick	3375µI
VS30-28-1MC	Comb 28 sample, 1mm thick MC compatible	80µl	VS30-28-1.5MC	Comb 28 sample, 1.5mm thick MC compatible	120µl
VS30-56-1MC	Comb 56 sample, 1mm thick MC compatible	40µl	VS30-56-1.5MC	Comb 56 sample, 1.5mm thick MC compatible	60µl
VS30-75-1MC	Comb 75 sample, 1mm thick MC compatible	25µl	VS30-75-1.5MC	Comb 75 sample, 1.5mm thick MC compatible	37µl



Electroblotting is a technique to immobilise proteins or nucleic acid separation on a solid membrane support. Samples are then detected using specific antibodies or nucleic acid probes to detect individual proteins or nucleic acid sequences. This allows the quantification of proteins and nucleic acids from various samples, and makes it a powerful technique in proteomics and genomics.

Cleaver Scientific offers four types of system:

MODULAR ELECTROBLOTTERS – combine PAGE and transfer techniques within the same tank. These options are shown in the PAGE vertical sections

TANK TRANSFER SYSTEMS – available with either plate or wire electrodes, support efficient, quantitative transfers over a wide molecular weight range. Plate electrode systems are faster through greater field strength; wire electrodes are more economical, consuming less current and generating less heat.

SEMI-DRY TRANSFER SYSTEMS – perfect for rapid, high-intensity transfers of mid-range proteins, 10-100kD in size.

MICROFILTRATION (DOT AND SLOT BLOTTING) – does not require electrophoresis and is used to determine the working conditions for a new blotting assay, antibody titres and antibody-antigen specificity. Also suitable for nucleic acids

Tank Sub & Modular Electroblotters


Designed primarily for wet electroblotting of proteins, these Electroblotters offer a combination of increased capacity with economy saving features.

Both units, Mini 10×10 cm and Maxi 20×20 cm, have increased capacity over standard systems with up to five gel blot cassettes utilised at any one time. This is especially useful in high throughput laboratories.

A uniform electric field is provided by a high intensity coiled electrode and ensures uniform transfer across the blot surface. The cassette's open architecture ensures the maximum blot area allows direct transfer of current. Its rigid construction ensures contact between the gel and membrane is retained throughout the blot and an even pressure is



maintained. These units are compatible with magnetic stirrers to aid heat dispersal and prevent pH drifts in the buffer due to incomplete buffer mixing. Each system includes a cooling pack to further enhance transfer efficiency by removing excess heat. This also saves on buffer for added economy.



- Ideal for wet electroblotting of proteins -Western blotting
- Up to five gel blot cassettes utilised at any one time
- Hinged cassettes for added convenience
- Accommodates gel thicknesses from 0.25 up to 3mm

TECHNICAL SPEC	TECHNICAL SPECIFICATIONS				
Unit dimensions (W x D x H)	Mini Maxi	19 x 13 x 19 24 x 16 x 26			
Max. sample, Mini capacityMaxi	nple, Mini 5 Blots, 10 x 10cm Maxi 5 Blots, 20 x 20cm 20 Blots, 10 x 10cm				
Buffer volume, 1500ml 4300ml; Max 600	Mini Oml	Min 1000m Maxi	il; Max Min		

Ordering Information				
EBM10	TankBlot Mini ElectroBlotter, 10 x 10cm System for five cassettes,	SB10C	Eblot Mini Cassette	
	with tank and lid, 5x cassettes, 12x fibre pads and cooling pack	SB10F	Fibre pads - pk/8	
EBM20	TankBlot Maxi ElectroBlotter, 20 x 20cm System for five cassettes,	SB20C	Eblot Maxi Cassette	
	with tank and lid, 5x cassettes, 12x fibre pads and cooling pack	SB20F	Fibre pads - pk/6	



Semi Dry Blotters

These Semi Dry Blotters offer rapid transfer times for DNA, RNA and protein blotting - typically 15 to 30 minutes.

All units can be used for all types of blotting: western, southern and northern via uncomplicated buffer and set up procedures and are compatible with gel thicknesses from 0.25 up to 10mm without the need for additional equipment.

Semi Dry Blotting has the added benefit of economic transfers due to very low buffer volumes – typically only a few millilitres of buffer are required per transfer. The electrodes, comprising platinum coated anode and stainless steel cathode, will exhibit practically no



corrosion and so provide many years of trouble free use. Uniform heat dispersion across the blot sandwich ensures stable transfer times and no heat induced sample loss or transfer distortions.



KEY FEATURES

- Rapid transfer times
- Western, Southern and Northern Blots
- Economic Transfers due to very low buffer volumes
- Screw down lid accommodates gels from 0.25 up to 10mm
- Uniform heat dispersion

Dot and Slot

Dot Blot and Slot Blot microfiltration manifolds are designed for DNA and RNA filter blot hybridisations and immunological (Ag/Ab) screening applications.

Machined from high density acrylic, their precision lapped mating surfaces and leak proof gasket ensures uniform filter contact, preventing lateral transfer of samples- smudging - by ensuring that a complete vacuum is formed. A permanent filter template is provided with each manifold to simplify the cutting of filters to the exact size. A vacuum of approximately 600mm Hg (0.8 Bar) is required during sample application. Four configurations are available for 24 & 48 for slots and 48 & 96 wells for dots in the configuration of standard microplates. Each well is alpha-numerically grid referenced for easy identification

- Low cost
- Easy assembly
- Alpha-numeric sample identification
- Four sample configurations







Model	D48	D96	S24	S48
Configuration	3 x 16	8 x 12	2 x 12	3 x 16
Size of well	6mm diameter 12mm deep	6mm diameter 12mm deep	6 x 0.5mm 12mm deep	6 x 0.5mm 12mm deep
Vacuum required		- 600mg Hg 0.8 B	AR with cold tra	ıp
Unit dimensions	60x95x100cm	60x105x140cm	60x74x83cm	60x95x100cm
Membranes size required	12.1 x 4.4cm	11 x 7.4cm	12.1 x 4.4cm	12.1 x 4.4cm

ORDERING I	Ordering Information				
SEMI DRY BLOT	SEMI DRY BLOTTERS				
SD10	Semi Dry Mini, 10 x 10cm System	SD20	Semi Dry Midi, 20 x 20cm System		
DOT & SLOT BL	DOT & SLOT BLOTTERS				
CSL-D48	48-well Dot Blot Manifold, 3 x 16 array	CSL-S24	24-well Slot Blot Manifold , 2 x 12 array		
CSL-D96	96-well Dot Blot Manifold, 8 x 12 array	CSL-S48	48-well Slot Blot Manifold , 3 x 16 array		





PAGE Buffers

Five buffers are available in powder sachets for a range of native and denaturing protein gel electrophoresis techniques.

Each powder sachet, which is supplied as a 10-pack, may be reconstituted to make 1 litre of working solution. Running buffers are also available in 1 litre and 5 litre volumes as ready made 10x Tris-Glycine and 10x Tris-Glycine-SDS solutions.



KEY FEATURES

- Convenient, pre-made stock solution or powder – just dilute or dissolve as necessary with water
- Save time & trouble no weighing, pH adjustment or need to stock individual compounds
- Long shelf-life
- Consistency assured rigorous QC for reproducible separations

	SPECIFICATIONS	A 11 11
Powder Buffer	Composition	Applications
Tris-Glycine SDS	Each litre of 1x working solution contains: Tris-base (25mM); glycine (192mM); SDS, 0.1% (w/v); followed by distilled water. Working solution pH = 8.3.	Denaturing SDS-PAGE for most cel- lular proteins, 10-200kDa in size
Tris-Glycine	Each litre of 1x working solution contains: Tris-base (25mM); glycine (192mM); followed by distilled water. Working solution pH = 8.3.	Native PAGE
Tris-Tricine-SDS	Each litre of 1x working solution contains: Tris-base (0.1M); tricine, (0.1M); SDS, 0.1% (w/v); followed by distilled water. Working solution pH = 8.25 .	Denaturing SDS-PAGE, with greater resolving power for small proteins 2-20kDa in size
MOPS-SDS	Each litre of 1x working solution contains: MOPS (50mM); Tris Base (50mM); SDS, 0.1% (w/v); EDTA (1mM); followed by distilled water. Working solution pH = 7.7.	Denaturing SDS-PAGE for medium- to large-sized proteins
MES-SDS	Each litre of 1x working solution contains: MES (50mM final stock concentration); Tris Base (50mM); SDS, 0.1% (w/v); EDTA (1mM); followed by distilled water. Working solution pH = 7.3.	Denaturing SDS-PAGE for small- to medium-sized proteins; faster than MOPS

BP Grade ultra pure water

BP Grade Sterile Water has endotoxins removed by electrostatic filtration at the final purification stage prior to autoclaving. The LAL tested water conforms to the standard having less than <0.25EU/ml to ensure the water is of pre-requisite quality. This product is therefore pyrogen free. CFU>0 WFi compatible.

Ponceau S

Ponceau S staining solution is reusable and available in a convenient 500ml volume for membrane staining and early protein detection following transfer before western blotting. Ponceau S may also be supplied a powder staining kit for long-term storage.

ORDERING INFO	PRMATION		
POWDER BUFFERS		LIQUID BUFFERS	
CSL-TGSDSP	Powdered Tris-Glycine-SDS Running buffer - 10 Sachets (10 litres/pk)	CSL-TG10X1L	Buffer Tris-Glycine 10 x 1 litre
CSL-TGP	Powdered Tris-Glycine Running buffer - 10 Sachets (10 litres/pk)	CSL-TG10X5L	Buffer Tris-Glycine 10 x 5 litre
CSL-TTSDSP	Powdered Tris-Tricine-SDS Running buffer - 10 Sachets (10 litres/pk)	CSL-TG-SDS10X1L	Buffer Tris-Glycine SDS 10 x 1 litre
CSL-MSDSP	Powdered MOPS-SDS buffer Running buffer - 10 Sachets (10 litres/pk)	CSL-TG-SDS10X5L	Buffer Tris-Glycine SDS 10 x 5 litre
CSL-MESDSP	Powdered MES-SDS buffer Running buffer - 10 Sachets (10 litres/pk)		
CSL-PSS	Ponceau S staining solution (500ml)	CSL-PSB	Ponceau S staining solution powder staining kit (makes 2000ml)
UPW1000	BP Grade Sterile Water, 1000ml		
RFW250	RNase-Free Water, 1x250ml	RFW50X5	RNase-Free Water, 50x5ml



reagents & CHEMICALS


Protein Markers

Stable for up to 2 years if stored at -20°C and supplied prestained in gel loading buffer for direct loading, Cleaver Scientific PINK Plus and BLUE Wide Range recombinant protein markers are perfect for SDS-PAGE applications.

Sizes range from 10-175kDa for PINK Plus and 10-245kDa for BLUE Wide Range, making both markers suitable for accurate molecular weight determination of most cellular proteins.

Each marker is covalently bound to a pink or blue colour chromaphore to produce a ladder of evenly interspersed bands of uniform intensity. Coloured reference bands serve as visual indicators of electrophoresis run progression and the efficiency of western transfer onto membranes following SDS-PAGE. Both PINK Plus and BLUE Wide Range markers can be detected at volumes as low as 2.5µl per well.

TECHNICAL SPECIFICATIONS						
Cat. No.	CSL-PPL	CSL-BBL				
Size Range	10-175kDa	10-245kDa				
Number of Bands	11	12				
Reference Bands	10, 40 and 90kDa blue 25 & 75kDa; green & red					
Contents	Max. 2.2mg total protein in 15% (v/v) glycerol, 2% SDS,	Max. 2.4mg total protein in 15% (v/v) glycerol, 2% SDS,				
Volume Supplied	500µl 500µl					
Storage	3 months at 4°C & 24 months at -20°C					
Loading Volume	2.5-5µl/well					
Number of Applications	100-200					
Source	Recombinant proteins, various sources					

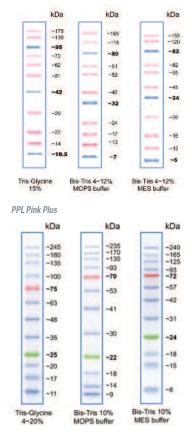

BBL Blue Wide Range

Blotting membranes

Used in Western Blotting of Proteins and for use in Hybridisation Techniques. PDVF with nitrocellulose and nylon membranes are available for different application needs.

A protein's properties (i.e., charge, hydrophobicity, etc.) affects its ability to bind to membrane surfaces. Finding the optimal membrane may require experimenting with your specific protein on different materials. We supply PVDF membrane in sheet form and as a 3M role which can be cut to size to fit your particular need.

Blotting membrane rolls

Supplied in 0.24x3m and 0.3x3m (w x l) sizes, allowing them to be cut to match specific gel formats, these membrane rolls are suitable for transfer of proteins and nucleic acids from polyacrylamide and agarose gels. Offered in 0.2 and 0.45µm pore sizes.

Blot absorbent filter paper

This blot-absorbent filter paper is supplied in packs of 50 and in sizes of 10x10cm and 20x20cm. Its 1mm thick texture and high buffer retention properties, being able to absorb twice its own weight in buffer, allow it to exert the gel-membrane compression needed for efficient transfers

Ordering In	Ordering Information						
PROTEIN MARKET	PROTEIN MARKERS						
CSL-PPL	Pink Plus Prestained Protein Ladder, 10-175kDa, with 10, 40 &	CSL-BBL	Blue Wide Range Prestained Protein Ladder, 10-245kDa, with 25 &				
	90kDa reference bands, 1x 500μl vial.		75kDa reference bands, 1x 500µl vial.				
BLOTTING MEMB	BLOTTING MEMBRANES AND ROLLS						
CSL-RNC45	Nitrocellulose roll, 0.3x3m (w x l)	CSL-RNY45	Positively charged supported nylon, 0.24x3m (w x I)				
CSL-RNC2	Nitrocellulose roll, 0.3x3m (w x l)	CSL-RNY2	Positively charged supported nylon, 0.24x3m (w x I)				
CSL-PVDF0.22S	10 Pre-cut PVDF 28 x28 cm 0.22µm	CSL-PVDF0.45R	Roll PVDF 28 cm x 3 m, 0.45µm				
CSL-PVDF0.45S	10 Pre-cut PVDF 28 x28 cm 0.45µm	CSL-PVDF0.22R	Roll PVDF 28 cm x 3 m, 0.22µm				
BLOT ABSORBEN	BLOT ABSORBENT FILTER PAPER						
CSL-BP1010	Blot-Absorbent Filter paper, 10x10cm, pack of 50	CSL-BP2020	Blot-Absorbent Filter paper, 20x20cm, pack of 50				



COMETASSAY

COMET assay tanks are available in three slide formats to study single cell gel electrophoresis (SCGE), a technique made popular by drug toxicology and carcinogenesis studies for the detection and quantitation of DNA damage in cells.

Each tank's robust construction from ebony acrylic ensures that cells remain free of exposure to background light and DNA damage during electrophoresis, while a cooled central platform provides a convenient surface for slide preparation and control of slide temperature during the assay. Following electrophoresis, DNA damage may be measured using Comet Assay scoring software.



For COMET assay cooling we recommend the CSL-CHILLER. This CHILLER is ready assembled with the thermostat mounted on the refrigerator and supplied with insulated tubing and clips to form a system ready to use. A simple-to-use rotor dial plus two keys provide access to the interactive interface for fast, accurate set-up

i	TEQUINICAL SPECI	FIGATIONS					
TECHNICAL SPECIFICATIONS							
	TEMPERATURE RANGE	-25 то 100°C	PUMP FLOW RATE	17 L/MIN (MAX.)			
	STABILITY (WATER @ 10°C)	ffl 0.1°C	No. STORED TEMP, VALUES	3			
	UNIFORMITY (WATER @ 10°C)	ffl 0.1°C	SAFETY OVER-TEMPERATURE	ADJUSTABLE CUT-OUT			
	SETTING RESOLUTION	0.1°C	HEATER POWER 230 V	1.3 KW			
	DISPLAY	4 DIGIT LED	HEIGHT ABOVE TANK RIM	200мм			
	TIMER FUNCTION	1minto 99 Hrs 59 mins	DEPTH BELOW TANK RIM	135мм			



High specification Chiller


KFY FFATURES

Quantifying DNA damage and repair in drug development application and Reproductive science.

- Overview: Following genotoxic insult, such as ionizing radiation, the resultant strand breakage of supercoiled duplex DNA reduces the size of the large genomic DNA from which these strands are separated or drawn out by electrophoresis. The genomic DNA then takes on the appearance of a 'comet' as its negatively charged broken ends and fragments migrate towards the anode during electrophoresis.
- Method: After exposure to a genotoxic insult cells are suspended within low melting point agarose and embedded within a thin layer of agarose on a microscope slide. Cellular protein is then removed by lysis in detergent, when DNA is allowed to unwind in alkaline conditions before electrophoresis. The DNA is electrophoresed, stained and then analysed using fluorescent microscopy and imaging software.

TECHNICAL SPECIFICATIONS							
SLIDE CAPACITY	10	20	40				
Unit Dimensions (wxlxh)	17х34х9см	31х34х9см	33х59х9см				
VOLUME	550мL	1000мL	2100мL				

This Chilling Plate is custom designed and manufactured specifically for Comet Assay. The Chilling Plate can accommodate 26 Comet assay slides and assists in the Comet Assay process by allowing a rapid solidification of the low melting point agarose on the Comet Assay slides and facilitates easy retrieval of the slides once the agarose gels are solid.



Ordering Information						
CSL-COM10	Comet Assay Tank for 10 Slides	CSL-CHILLER	Chiller unit for active slide temperature control			
CSL-COM20	Comet Assay Tank for 20 Slides	CSL-CHILLPLATE	Chill Plate for 26 Comet Assay Slides			
CSL-COM40	Comet Assay Tank for 40 Slides					




COMPAC-50

Developed in collaboration with the Oxidative Stress Group in the Department of Cancer Studies and Molecular Medicine within the University of Leicester, the COMPAC-50 is a high throughput electrophoresis system, to perform the Comet Assay using a patented vertical slide orientation design. This allows up to 50 slides to be run in a single tank, with a fraction of the footprint of traditional tanks.

The unique patent pending design employs two carriers to hold a total of 50 slides (25 per carrier) vertically. This provides two distinct advantages over conventional Comet Assay systems that utilise a horizontal platform for manual mounting of multiple individual slides. Firstly to produce a highly compact system which saves 75% of Lab space. Secondly by holding 25 slides in a rack this allows slides to be processed together in one batch saving on handling assay time by up to 90%. Consequently, this is not only beneficial for electrophoresis but also in the lysis, neutralisation, staining and washing steps of the Comet Assay, when each batch of slides may be treated during each step respectively using the four ebony acrylic staining dishes supplied. In addition, the COMPAC-50 benefits from a high performance ceramic cooling base with sliding drawer to accommodate a cool pack, which is frozen before use, to maintain optimal buffer temperature.





KEY FEATURES

- Patented design used vertical slide orientation to increase throughput
- Slide carriers eliminate manual handling decreasing errors and assay time.
- Ten staining dishes supplied for batchtreatment of slides during the lysis, neutralisation, staining and washing steps
- Ebony acrylic construction ensures reduced exposure to background light and potential DNA damage
- Highly compact design optimises electrophoresis efficiency during Comet Assay
- Ebony acrylic construction ensures reduced exposure to background light and potential DNA damage
- 50 slides may be run within 20 minutes using powerPRO300 power supply (page 53)



Typical Results

Repair of UVB-induced DNA damage in human keratinocytes, using enzyme-modified comet assay. HaCaT cells were irradiated with 1 J/cm2 UVB, then allowed to repair in fresh medium and DNA damage analysed at different time points (A) 0 h, (B) 1 h,(C) 6 h, (D) unirradiated (courtesy of Karbaschi, M. University of Leicester, Leicester, UK).

TECHNICAL SPECIFICA	TIONS
Unit Dimensions (WxLxH)	26.5 x 15 x 15см
TOTAL SLIDE CAPACITY	50 SLIDES 25 x 75MM
SLIDE CAPACITY PER RACK	25
VOLUME	550 мL
RECOMMENDED POWER SUPPLY	POWERPRO300 300V, 700mA, 150W

OPPEDING INCOMATION

COMPAC-50 High Throughput Comet System for 50 slides, includes 2x 25 slide carriers, 10x staining dishes, tank with ceramic cooling platform and cool pack, lid and power cables COMPAC-P9300 COMPAC-50 and powerPR0300 Power Supply 300V, 700mA, 150W COMPAC-50 Vertical slide carrier for 25 slides pk/1 CSI-1 MA50 Agarose 50g Low melting point (Pg 23)	ORDERING IN	Ordering Information						
pack, lid and power cables COMPAC-50-PE Positive electrode COMPAC-PP300 COMPAC-50 and powerPR0300 Power Supply 300V, 700mA, 150W COMPAC-50-NE Negative electrode	COMPAC-50	High Throughput Comet System for 50 slides, includes 2x 25 slide	STAINDISH	Ebony acrylic stain dish, pk/1				
COMPAC-PP300 COMPAC-50 and powerPR0300 Power Supply 300V, 700mA, 150W COMPAC-50-NE Negative electrode		carriers, 10x staining dishes, tank with ceramic cooling platform and cool	STAINDISH4X	Ebony acrylic stain dish, pk/4				
		pack, lid and power cables	COMPAC- 50-PE	Positive electrode				
COMPAC-25 Vertical slide carrier for 25 slides pk/1 CSL-LMA50 Agarose 50g Low melting point (Pg 23)	COMPAC-PP300	COMPAC-50 and powerPRO300 Power Supply 300V, 700mA, 150W	COMPAC- 50-NE	Negative electrode				
502 2111 10 20 Total and a carrol for 20 and a copy pro 1	COMRAC-25	Vertical slide carrier for 25 slides, pk/1	CSL-LMA50	Agarose 50g, Low melting point (Pg 23)				

atencion.clientes@akralab.es 902 222 275 965 116 521 www.akralab.es



CELIAS Clinical

Cellulose acetate electrophoresis is an important technique in clinical diagnostics. The Cleaver Scientific range of cellulose acetate products offers a complete system solution for research and clinical cellulose acetate electrophoresis applications. CellasGEL includes both equipment and consumables to assist in the research and diagnosis of specific disease states.

The ideal tank for standard 'dry' membrane and 'wet' gel cellulose acetate techniques, the Cellas electrophoresis system is designed and built to our high quality standard to address both routine clinical and research requirements. Two adjustable supports, which can be positioned anywhere within the tank, readily accommodate different lengths of dry cellulose acetate membrane to a maximum 20cm.

quantific abnorma cell diso Compact le electropho Accommo

KEY FEATURES


Qualitative identification and quantification of Hb variants. Finding abnormalities of Hb synthesis like sickle cell disorders, thalassaemias etc.

- Compact high resolution system for clinical electrophoresis
- Accommodates strips and gels up to 24x20cm
- Complete range of cellulose acetate gels and kits
- Densitometer software and scanner available





3x CSLBDG8.5S



CELLAS I	Horizontal Unit for Cellulose Acetate Electrophoresis		
Code	Description	Packages (Kit and Accessories) required, Code	Diagnostic Application
CSLKITCU	CellasKIT: serum and concentrated urine IFE Kit content, sufficient for 5 patients (10x semi-micro tests): 30 CellasGEL strips & TGS buffer; Coomassie stain, clearing & saline solutions; volumetric distributors & antisera (anti-IgG, IgA, IgM, Ig & Ig); blotting paper & mylar film. Excludes: Destain.	CSLKITCU-ABS Includes: 1x CSLKITCU, 1x CSLAPPS22, 3x CSLBDG8.5S	MGUS, MM
CSLKITI2432	CellasKIT: serum IFE Kit content, sufficient for 24 patients (semi-micro) & 32 (micro): 24 CellasGEL strips & Tris-Hippurate buffer; Amidoblack stain, saline & clearing solutions; volumetric distributors & antisera (anti-lgG, lgA, lgM, lg & lg); blotting paper & mylar film. Excludes: Destain	CSLKITI2432-ABS Includes: 1x CSLKITI2432, 1x CSLAPPS6, 6x BCSLDG8.5S CSLKITI2432-ABM Includes: 1x CSLKITI2432, 1x CSLAPP8M 6x CSLBDG8.5S	MGUS, MM
CSLKITSP100200	CellasKIT: serum proteins Kit content, sufficient for 100x semi-micro or 200x micro tests: 25 CellasGEL strips & Tris-Hippurate buffer; Ponceau S stain, destain & clearing solutions; blotting paper & mylar film	CSLKITSP-ABS Includes: 1x CSLKITSP100200 1x CSLAPPS4, 3x CSLBDG8.5S CSLKITSP-ABM Includes: 1x CSLKITSP100200 1x CSLAPPM8, 3x CSLBDG8.5S	Dysproteinaen Albumin, Alph Alpha-2, Transfe C3 & Gamma Glo Quantitation
CSLKITSP150200	CellasKIT: serum proteins (high resolution) Kit content, sufficient for 150x semi-micro or 200x micro tests: 25 CellasGEL strips & TGS buffer; Coomassie stain, citric acid & clearing solutions; blotting paper & mylar film. Excludes: Destain	CSLKITSPHR-ABS Includes: 1x CSLKITSP150200 1x CSLAPPS4, 3x CSLBDG8.5S CSLKITSPHR-ABM Includes: 1x CSLKITSP150200 1x CSLAPPM8, 3x CSLBDG8.5S	Incipient Gammopathi
CSLKITHG100	CellasKIT: haemoglobin Kit content, sufficient for 100x semi-micro tests: 25 CellasGEL strips & Tris-Glycine buffer; Ponceau S stain, destain & clearing solutions; blotting paper & mylar film.	CSLKITHG100-ABS Includes: 1x CSLKITHG100, 1x CSLAPPS4 3x CSLBDG8.5S	Haemo- globinopathi
CSLKITLP100	CellaskIT: lipoproteins at encion clientes@akralab.es · 902 222 275 · 965 116 521	· www.akialaploblacSLAPPS4	Hyper-lipidaemi

25 Cellogel strips & Tris-Hippurate buffer; Sudan Black stain & clearing solution; blotting paper & mylar film



CellasGEL 'wet' cellulose acetate gel strips are ready to use and overcome many of limitations of traditional 'dry' cellulose acetate membranes.
CellasGEL's advantages over dry cellulose acetate membranes are as follows:

1. Wet state – unlike dry membranes, CellasGEL is a cellulose acetate film produced in a wet form to facilitate buffer adsorption, but without the entrapment of air bubbles that inhibit electrophoresis

2. Greater thickness – CellasGEL's greater thickness (190-500---m) compared to dry membranes (160-190µm) allows application of larger sample volumes to enhance detection of poor quality specimens low in protein content 3. High resolution – samples may be applied to CellasGEL as wider but finer bands, without risk of diffusion, to make band quantitation more reproducible; this is further enhanced by extended migration distances (60-70mm) that improve band separation

4. Amphiphilic – CellasGEL's lipophilic and hydrophilic properties make it the perfect separation medium for many different biological molecules, ranging from lipoproteins to haemoglobins. CellasGEL is supplied either as individual packs of 25 or 100 strips or within clinical test kits.

ORDERING INF	FORMATION						
CSLGEL2.514250	2.5x14 CellasGEL 250 micron 100/pack			CSLGEL5.714250	5.7x14 CellasGEL 250 micron, 25/pack		
CSLGEL2.514200	2.5x14 CellasGEL 200 micron 100/pack			CSLGEL5.714190	5.7x14 CellasGEL 190, high resolution, 25/pack		
CSLGEL2.514190	2.5x14 CellasGEL 190, high resolution, 100/pac	:k		CSLGEL2.517200	2.5x17 CellasGEL 200 micron, 25/pack		
CSLGEL5.714500	5.7x14 CellasGEL 500, high volume, 25/pack						
Part Number	Description	Volume applied / sample band width	Compatible Strip Size	Part Number	Description	Volume applied / sample band width	Compatibl Strip Size
CSLAPPS22	1x 2-specimen semi-micro applicator	0.7µl / 7mm	2.5x14cm	CSLAPPS6	1x 6-specimen semi-micro applicator	0.7µI / 7mm	5.7x14cm
CSLAPPS4SP	1x 4-specimen semi-micro applicator	0.9µl/9mm	5.7x14cm	CSLAPPM8	1x 8-sample micro applicator	0.3µl / 5mm	5.7x14cm
CSLAPPS4	1x 4-specimen semi-micro applicator	1.2µl / 9mm	5.7x14cm				
CellasGEL WET N	MEMBRANE BRIDGES AND DENSITOMET	ſER					
CSLBDG8.5S	1x 8.5cm bridge for 1x 5.7x14cm or 2x 2.5x14cm	ı CellasGEL strips					
CSLDENS	TurboScan Software Densitometer (excludes co	imputer and scanner)					
CSLSCAN	Flatbed scanner for TurboScan software						

CellasMEM'dry'

Although CellasGEL cellulose acetate gels have a number of advantages over traditional dry cellulose acetate membranes, many manual systems and modern robotic platforms still use dry cellulose acetate membranes, which are usually supported on a plastic backing. Consequently, CellasMEM, a range of dry cellulose acetate membranes supported on a Mylar film has been developed to address this demand.

Package deals provide a quick and convenient solution for those users wishing to perform the more popular Helena-type applications. The most

basic kit includes 25x76 and 60x76mm CellasMEM membranes, 8-sample micro applicator, and paper wicks, while the complete version also contains a Cellas tank and new NANO500 power supply.

Each CellasMEM dry cellulose acetate membrane is available in 25x76mm (MEM257650), 60x76mm (MEM607625) and 94x76mm (MEM947625) plate sizes, and is compatible with the manual and automated platforms of many leading and emerging brands within the clinical electrophoresis market, including: Helena Laboratories, Interlab and Seleo.

CellasMEM is supplied either as individual packs of 25 or 50 strips to perform manual assays for Serum Protein (Dysproteinaemia; Incipient Gammopathies) and Haemoglobin Analyses (Haemoglobinopathies such as Thalassaemias and Sickle Cell Disorders).

57650) &
sample
S
T, CELLAS
oply (page 54)
S

	MEM577625, MEM94	17625, MEM94135	525 membranes				
Code	Size (WxL)	Pack Size	Compatible Manual System / Automated Platform	Code	Size (WxL)	Pack Size	Compatible Manual System / Automated Platform
CellasME	M MANUAL ASSAY MEMBI	RANE		CellasMEM ASS	AY MEMBRANE		
CSLMEM25	57650 25x76mm	50/pack	Helena Titan 3 system	CSLMEM307625	30x76mm	25/pack	Genio Interlab - small
CSLMEM60	07625 60x76mm	25/pack	Helena Titan 3 system	CSLMEM607624	60x76mm	24/pack	Genio Interlab - standard
CSLMEM57	77625 57x76mm	25/pack	Helena Titan 3 system	CSLMEM7662P25	76x62mm, punched	25/pack	Interlab 648 ISO, 648 PC
CSLMEM94	47625 94x76mm	25/pack	Helena Titan 3 system	CSLMEM7413625	74x136mm	25/pack	SAE - NT
CSLMEM94	413525 94x135mm	25/pack	Helena Titan 3 system	CSLMEM7822725	78x227mm	25/pack	SAE 500/600
CSLMEM76	660P25 76x60mm, punched	25/pack	SELEO AdaLya 24, Selvet 24,	CSLMEM8012525	80x125mm	25/pack	Diafero Standard
			Thera 72, Exprime, Giant	CSLMEM2508025	280x80mm	25/pack	Diafero Extra
				CSLMEM8022525	80x225mm	25/pack	Cliniphor
				CSLMEM762325	76x23mm	25/pack	Saechem
				CSLMEM678930	67x89mm	30/pack	Smart
				CSLMEM7618025	76x180mm	25/pack	Pragma
				CSLMEM7621025	76x210mm	25/pack	Megaphore



CEL as Clinical

Although CellasGEL cellulose acetate gels have a number of advantages over traditional dry cellulose acetate membranes, many manual systems and modern robotic platforms still use dry cellulose acetate membranes, which are usually supported on a plastic backing. Consequently, CellasMEM, a range of dry cellulose acetate membranes supported on a Mylar film has been developed to address this demand.

Each CellasMEM dry cellulose acetate membrane is available in 25x76mm (MEM257650), 60x76mm (MEM607625) and 94x76mm (MEM947625) plate sizes, and is compatible with the manual and automated platforms of many leading and emerging brands within the clinical electrophoresis market, including: Helena Laboratories, Interlab and Seleo. CellasMEM is supplied either as individual packs of 25 or 50 strips to perform manual assays for Serum Protein (Dysproteinaemia; Incipient Gammopathies) and Haemoglobin Analyses (Haemoglobinopathies such as Thalassaemias and Sickle Cell Disorders).

Applicators

The CellasMEM MEMAPPM8 is an 8-sample micro applicator designed for use with 60x76mm (MEM607625) and 25x76mm (MEM257650)
CellasMEM dry plates. The applicator dispenses each sample deposit as a thin band 5mm wide that is equivalent to 0.25 I in volume; and may load either one 60x76mm strip or two 25x76mm strips (4 samples per strip) at a time. By loading each sample as a tighter, but finer, band over a wider front, the sample diffusion and saturation typical of standard syringe loading methods is significantly reduced, resulting in improved band quantitation. A MEMAPPS6 semi-micro applicator is also available to load 6 samples, each sample deposit 7mm wide and corresponding to 0.5 I in volume.

Bridges

Adjustable bridges within the CELLAS tank render specialist bridges unnecessary. Both CELLAS bridges may be positioned either side of the central buffer partition within the tank to produce the 76mm gap necessary to support Helena-type membranes, while the 24cm width of the tank accommodates either three 60x76mm or six 25x76mm CellasMEM membranes per run. A dedicated bridge adaptor (MEMBA) is available for those users of different cellulose acetate electrophoresis tanks that do not have adjustable bridges.

Paper Wicks

Supplied in packs of 100 and available in 190x60mm and 220x40mm (WxL) sizes, CellasMEM disposable paper wicks may be used respectively with standard CellasMEM dry plates and CellasMEM dry plates for Helena applications. To set up the Cellas tank for use with dry plates, simply insert each paper wick lengthwise within the tank pre-filled with buffer, so that the buffer will become absorbed. Once absorbed, fold over the top of each wick to make a support bridge, ensuring the bottom edge of the wick is immersed within buffer and in contact with the bottom of the tank, while the top edge rests along the adjustable bridge. Repeat for the other bridge.

CellasMEM Membranes

CellasMEM membrane plates are available in many different sizes and quantities ranging from the market-leading Helena Titan 3 manual system to punched dry membrane plates compatible with the strip-holders of automated systems from Genio Interlab and SELEO. Also listed are CellasMEM membranes for older systems (some of which are obsolescent) that are still in use today.

CellasMEM Package Deals

Package deals provide a quick and convenient solution for those users wishing to perform the more popular Helena-type applications. The most basic kit includes 25x76 and 60x76mm CellasMEM membranes, 8-sample micro applicator, and paper wicks, while the complete version also contains a Cellas tank and new NANO500 power supply.

ORDERING IN	FORMATION		
CellasMEM DRY	MEMBRANE APPLICATORS	CellasMEM PAC	KAGE DEALS
CSLMEMAPPM8	CellasMEM 8-sample micro applicator	CSLMEMHKIT	CellasMEM Helena-Type Kit, includes 25x76mm (CSLMEM257650) &
CSLMEMAPPS6	CellasMEM 6-sample semi-micro applicator		60x76mm (CSLMEM607625) membranes; CSLMEMAPPM8 8-sample
PAPER WICKS			micro applicator & CSLMEMWICKH 220x40mm paper wicks
CSLMEMWICK	CellasMEM paper wicks 190x60mm, pack of 100	CSLMEMHCOMP	CellasMEM Helena-Type Workstation, includes CSLMEMHKIT, CELLAS tanks
CSLMEMWICKH	CellasMEM paper wicks 220x40mm, pack of 100; suitable for Helena-		& NANO500 (500V, 400mA, 120W) power supply (page 53)
	type cellulose applications with CSLMEM257650, CSLMEM607625,		
	CSLMEM577625, CSLMEM947625, CSLMEM9413525 membranes		

Code	Size (WxL)	Pack Size	Compatible Manual System / Automated Platform	Code	Size (WxL)	Pack Size	Compatible Manual System / Automated Platform
CellasMEM MANU	JAL ASSAY MEMBRAN	NE		CellasMEM ASS	AY MEMBRANE		
CSLMEM257650	25x76mm	50/pack	Helena Titan 3 system	CSLMEM307625	30x76mm	25/pack	Genio Interlab - small
CSLMEM607625	60x76mm	25/pack	Helena Titan 3 system	CSLMEM607624	60x76mm	24/pack	Genio Interlab - standard
CSLMEM577625	57x76mm	25/pack	Helena Titan 3 system	CSLMEM7662P25	76x62mm, punched	25/pack	Interlab 648 ISO, 648 PC
CSLMEM947625	94x76mm	25/pack	Helena Titan 3 system	CSLMEM7413625	74x136mm	25/pack	SAE - NT
CSLMEM9413525	94x135mm	25/pack	Helena Titan 3 system	CSLMEM7822725	78x227mm	25/pack	SAE 500/600
CSLMEM7660P25	76x60mm, punched	25/pack	SELEO AdaLya 24, Selvet 24,	CSLMEM8012525	80x125mm	25/pack	Diafero Standard
			Thera 72, Exprime, Giant	CSLMEM2508025	280x80mm	25/pack	Diafero Extra
				CSLMEM8022525	80x225mm	25/pack	Cliniphor
				CSLMEM762325	76x23mm	25/pack	Saechem
				CSLMEM678930	67x89mm	30/pack	Smart
				CSLMEM7618025	76x180mm	25/pack	Pragma
				CSLMEM7621025	76x210mm	25/pack	Megaphore



















Part Number	Description
CSLAPPS22	1x 2-specimen semi-micro applicator
CSLAPPS4SP	1x 4-specimen semi-micro applicator
CSLAPPS4	1x 4-specimen semi-micro applicator

olume applied / mple band width	Compatible Strip Size
0.7 µ l / 7mm	2.5x14cm
0.9 µ l / 9mm	5.7x14cm
1.2 µ I / 9mm	5.7x14cm

 Part Number
 Description

 CSLAPPS6
 1x 6-specimen semi-micro applicator

 CSLAPPM8
 1x 8-sample micro applicator

 $\begin{tabular}{lllll} \begin{tabular}{llllll} \begin{tabular}{lllll} \begin{tabular}{llllll} \begin{tabular}{lllll} \begin{tabular}{llllll} \begin$

Using CellasGEL

- 1. Equilibrate a CellasGEL for 10 minutes in Electrophoresis buffer using an agitating platform (e.g. 3D Shaker, page 68)
- 2. Dry surplus buffer from the CellasGEL before securing it to a Bridge located within a preprepared Cellas tank
- 3. Apply samples to the CellasGEL using the appropriate Applicator, and electrophorese at 200V for 30-9 secs (see Power Supplies, Page 58)
- 4. Remove the CellasGEL from the tank, and use the required Clinical Test Kit for staining and destaining and clearing
- 5. Place the CellasGEL on a suitably sized mylar sheet or glass plate and dry in an oven for 10 minutes at 80°C (e.g. NHYBRIDBASIC, page 70)
- 6. Quantify bands using Scanner and Densitometer Software

















omnipage Isoelectric Focusing

Equipped with rehydration and focusing trays, the Cleaver Scientific IEF system has been optimised to perform first-dimension isoelectric focusing (IEF) with IPG (immobilised pH gradient) strips quickly, easily and reproducibly. It can also be used with precast IEF Gels.

An ideal entry-level system for both experienced and occasional IEF users, the unit is versatile enough to meet the needs of laboratories with increased throughput requirements as well as first time users.

HIGH CAPACITY

Its high-capacity focusing tray accommodates up to twelve IPG strips. Adjustable 'pick-and-place' electrodes clip conveniently anywhere within the focusing tray to resolve IPG strips 7-24cm in length and are colour-coded to prevent polarity reversal. The Electrode frame clips directly on to the cooling plate and includes adjustable electrodes to run horizontal precast IEF and PAGE gels.

A cooling plate, manufactured from a special grade ceramic in a large 26x26cm surface area, facilitates effective heat dissipation and control, particularly during high voltage IEF techniques. An optional, but recommended, recirculating chiller connects quickly and easily to the cooling plate to maintain optimal operating temperatures for IPG strips and precast gels.

REHYDRATION

The Rehydration tray allows convenient transfer of IPG strips to the focusing tray without time-consuming removal of residual rehydration buffer and also enables the focusing tray to remain permanently in use for IEF to maximise throughput and provides useful storage at -20°C for focused strips before second-dimension runs.

For those requiring a power supply, the Consort EV2320, 3000V, 150mA, 150W enables desired Volt-hours for focusing to be attained faster at maximum voltage.



			IPG Strip Length				
Tray	Specifications		11cm*				
Focusing	TRAY						
Electro	DE DISTANCE	6.5см	10.2см	17.1см	22.7см		
Maximun	STRIP LENGTH ACCOMMODATED	25.3см	25.3см	25.3см	25.3см		
IPG STR	P LENGTH	7см	N/A*	18см	24см		
Rehydra	TION TRAY						
Maximun	STRIP LENGTH ACCOMMODATED	24см	24см	24см	24см		
Rесоммі	ENDED VOLUME FOR STRIP REHYDRATION	3.5ML	6мг	8.0 _{ML}	12.0 _{ML}		


KEY FEATURES

- For IPG strips and IEF gels
- Large cooling platform area
- 'Pick-and-Place' adjustable electrodes
- Focusing tray for a maximum twelve IPG strips
- Rehydration tray also included

IEF COMPONENTS



- Positive Electrode, CSL-IEFPOS
 Spring Positive Electrode,
 CSL-SGELEPOS
- Negative Electrode, CSL-IEFNEG
 Spring Negative Electrode,
 CSL-SGELENEG



5. Focusing Tray Adjustable Electrode Negative, CSL-FTELECNEG

 Focusing Tray Adjustable Electrode Positive, CSL-FTELECPOS



 Replacement IEF Tank, CSL-IEFTANK (Tank/Electrode Only, No Cooling Platform)

 Cooling Platform for IEF system, CSL-IEFCP

ORDERING INF	ORMATION		
CSL-IEF	Flatbed IEF system for IPG strips and gels, with focusing and rehydration tray	S	
CSL-CHILLER	Chiller system, -20 to 100°C, See page 42 for full technical specification	CSL-IEFCP	Cooling Platform for IEF system
IEF-KIT	1-D Combination Package, includes CSL-IEF, CSL-CHILLER and EV2320	CSL-IEFTANK	Replacement IEF Tank (Tank/Electrode Only, No Cooling Platform)
CSL-IEFPOS	Replacement positive electrode (Fits to Tank side)	IEF-LID	Lid for CSL-IEF (no cables)
CSL-IEFNEG	Replacement negative electrode (Fits to Tank side)	CSL-IEFPLT	Replacement Glass platform
CSL-SGELEPOS	Replacement Spring Positive Electrode	CSL-IEFFRME	Replacement electrode frame
CSL-SGELENEG	Replacement Spring Negative Electrode	CSL-RHYDTRY	Rehydration Tray
	Focusing Tray Adjustable Electrode Positive	CSL-FOCUSTRAY	Focusing Tray with adjustable electrodes
CSL-FTELECNEG	ocusing Tray Adjustable Electrode Negative	EV2320	Consort 3000V, 300mA, 300W power supply





Ideal for a variety of large format vertical gel applications, these Large Format vertical gel systems offer advanced features for enhancing gel resolution and ease of use, essential when handling gels of this size

Each unit contains ultra-soft silicone seals for easy plate sealing and trouble-free runs, even over extended run times. Resolution is enhanced by using an aluminium heat sink plate, essential for even sample migration. Added convenience is provided by a removable lower buffer tank and upper buffer drainage tap.

Special buffer chambers allow either low buffer volumes to be used for economy or high buffer volumes to be used for extended runs.

A wide range of interchangeable comb and spacer options allows many techniques to be easily accomplished including; DNA Sequencing, 2-D analysis, Microsatellite analysis, DNA fingerprinting, Gel shift assays, Single-Strand Conformation Polymorphism (SSCP), Heteroduplex and Oligonucleotide analysis.

KEY FEATURES

- Run up to 96 samples
- Enhanced gel heat homogenisation
- Variable low or high buffer volumes
- 20 x 50cm or 33 x 45cm formats



PLATE DIMENSIONS CSQ20 20 x 50 cm (W X L) CSQ33 33 x 45 cm MAX SAMPLE CAPACITY CSQ20 48 SAMPLES CSQ33 96 SAMPLES	ICAL SPECIE	ICATIONS
Buffer volume CSQ20 Min 500ml, Max 1000ml CSQ33 Min 800ml, Max 2000m		
COMBS AVAILABLE NO. OF TEETH 24, 48, 80, 96 THICKNESSES 0.25, 0.35, 1, 1.5mm	теетн 24	

PLATE RACKS

FlexiCaster for Large

These sturdy racks are designed for safe drying and storage of glass plates. The small rack can hold up to 20x 2mm thick plates while the larger rack can accommodate up to 10x 5mm thick glass plates.

ORDERING	INFORMATION
CSQ20	Large Format Vertic

CSQ20	Large Format Vertical, 20cm wide, glass plates, 0.35mm spaces, 48 sample	comb	
CSQ20-NG	Glass plates, Notched, pk/2	CSQ20-S0.35	Spacer set 0.35mm
CSQ20-PG	Glass plates, pk/2	CSQ20-S1	Spacer set 1mm
CSQ20-S0.25	Spacer set 0.25mm	CSQ20-S1.5	Spacer set 1.5mm
CSQ33	Large Format Vertical, 33cm wide, glass plates, 0.35mm spaces, 48 sample of	comb	
CSQ33-NG	Glass plates, Notched, pk/2	CSQ33-S1	Spacer set 1mm
CSQ33-PG	Glass plates, pk/2	CSQ33-S1.5	Spacer set 1.5mm
CSQ33-S0.25	Spacer set 0.25mm	CSL-FHS	Fan heater sensor kit for large format vertical units RRCSQ20 and RRCSQ33
CSQ33-S0.35	Spacer set 0.35mm		
CSL-MGPR	Mini Glass Plate Rack for 20x 2mm Plates	CSL-LGPR	Large Glass Plate Rack for 10x 5mm Plates

Code	DESCRIPTION	SAMPLE VOLUME	Code	DESCRIPTION	SAMPLE VOLUME
• • • • • • • • • • • • • • • • • • • •		PER WELL			PER WELL
CSQ20-0.25-24	Comb 24 sample, 0.25mm thick, Sharks tooth	7μΙ	CSQ20-1-24SQT	Comb 24 sample, 1mm thick, Square tooth	40µl
CSQ20-0.25-48	Comb 48 sample, 0.25mm thick, Sharks tooth	3µІ	CSQ20-1-48SQT	Comb 48 sample, 1mm thick, Square tooth	20µl
CSQ33-0.25-48	Comb 48 sample, 0.25mm thick, Sharks tooth	7µl	CSQ33-1-48SQT	Comb 48 sample, 1mm thick, Square tooth	35µl
CSQ33-0.25-96	Comb 96 sample, 0.25mm thick, Sharks tooth	3µІ	CSQ33-1-80SQT	Comb 80 sample, 1mm thick, Square tooth	20µl
CSQ20-0.35-24	Comb 24 sample, 0.35mm thick, Sharks tooth	9μΙ	CSQ20-1.5-24SQT	Comb 24 sample, 1.5mm thick, Square tooth	60µl
CSQ20-0.35-48	Comb 48 sample, 0.35mm thick, Sharks tooth	5μΙ	CSQ20-1.5-48SQT	Comb 48 sample, 1.5mm thick, Square tooth	30µl
CSQ33-0.35-48	Comb 48 sample, 0.35mm thick, Sharks tooth	9μΙ	CSQ33-1.5-48SQT	Comb 48 sample, 1.5mm thick, Square tooth	50µl
CSQ33-0.35-96	Comb 96 sample, 0.35mm thick, Sharks tooth	5μΙ	CSQ33-1.5-80SQT	Comb 80 sample, 1.5mm thick, Square tooth	30µl





mnipage Denaturing Gradient

The VS20WAVE-DGGE is a complete system for DNA mutation analysis. Using the innovative vertical screw-clamp technology of the new VS20-WAVE system, the VS20WAVE-DGGE is fully equipped - with temperature control unit, stirrer, gradient mixer and casting accessories - to perform specific mutation analysis applications.

The powerful microprocessor-controlled PID temperature control unit enables various mutation detection techniques to be undertaken between ambient temperature and 70°C, while the simple four-screw design of the WAVE insert accelerates set up of denaturing PAGE gels.

The VS20-DGGE can be used to screen single-base pair changes in the following applications:

- · Parallel Denaturing Gradient Gel Electrophoresis (DGGE)
- Constant Denaturing Gradient Gel Electrophoresis (CDGE) A maximum 96-sample throughput allows detection of as many mutations within a couple

- Maximum 96-sample throughput
- Four-screw vertical clamping technology accelerates set up
- Large format 20x20cm glass plates for improved resolution
- 100ml gradient mixer, with valvecontrolled 50ml reservoir and mixing chambers, makes two 1mm parallel







Innovative Casting and Set-up Mechanism


The VS20WAVE-DGGE utilises novel vertical screw clamp technology to assemble two vertical gels. This reduces the number of screws required for set up making casting assembly faster, while a built-in inner buffer chamber within the PAGE insert allows set-up to be completed without the inclusion of heavy top tanks or buffer chambers. A dual purpose PAGE insert eliminates the need for plate transfer, and is used with a cam casting base to guarantee efficient leak free casting.

Precise thermal control

The redesigned VS20DGGE-TC temperature control unit combines buffer recirculation with a heat sensor and 1.4 kW heating element to facilitate precise temperature control to within $\pm 0.02^{\circ} C$, allowing the gel temperature to be set to the melting temperature (Tm) of the amplified DNA polymorphism or mutation of interest. Other benefits include: a conspicuous 4-digit 16mm LED panel to aid set-up; precise tuning to within $0.1^{\circ} C$ resolution; an operating set point, plus three adjustable pre-set temperature values; and stirred buffer circulation for temperature stability and uniformity.

Programmable power supply option

At 500V, 800mA and 300W outputs, the optional powerPR0500 power supply provides full flexibility for different mutation detection techniques.



TotalLab 1D / CLIQS - Multiplex Analysis

CLIQS 1D Pro is more advanced analysis software used primarily for bandpattern matching within individual DGGE, SSCP and RFLP gels that are important for cultivar experiments, evolutionary biology and population genetics. CLIQS 1D Pro has a powerful band matching feature, which is flexible and easy to use, while visual tools show the results of matching and identify similarities within an individual gel, including lane clustering via dendrograms. More info on our software range can be found on our website.



powerPR0500 power supply



CSL-DSTIR Magnetic Stirrer



MU-D01 Peristaltic Pump



WAVE electrophoresis insert and cam casting base

TECHNICAL SPECIFICATIONS				
WAVE ELECTROPHORESIS INSERT AND	TANK	TEMPERATURE CONTROL UNIT		
Max. Number of Gels	Max. Number of Gels 2 per run		PID	
Plate Dimensions (W x H)	20x20cm	Operating Temperature Range	Ambient – 100°C	
Active Gel Dimensions (W x H)	16 x 17.5cm	Working Temperature Range (DGGE)	45-70°C	
Spacer Thicknesses Buffer	0.75, 1, 1.5 and 2mm	Buffer Recirculation Mechanism	Stirring	
Max. Sample Capacity96 samples; 48 per gelStandard Combs2x 1mm 24-sample		Temperature Uniformity/Stability at 37°C	±0.05/0.02°C	
		Setting/Display Resolution	0.1°C	
Available Combs	1, 5, 10, 18MC, 24, 36MC, 48;	Safety	Fluid-level float switch; isolated;	
	as per VS20WAVE and MAXI units		IEC 1010 /CE	
Max. Buffer Volume	8.5L	·	4	
Unit Dimensions (W x D x H)	40.5 x 17 x 44cm	Stored Temperature Values	1.4/1.3kW	
Weight	8kg	Heater Power at 230V/110VAC	1.5/1.4kW	
RECOMMENDED POWER SUPPLY	RECOMMENDED POWER SUPPLY			
Voltage	500V Total	Total Volume 100ml	100ml	
Current	800mA	Volume of Reservoir & Mixing Chambers	50ml	
Power	300W	Internal Diameter of Outlet Port	2mm	

Ordering Information				
VS20WAVE-DGGE*	Complete Denaturing Gradient Gel Electrophoresis System, 20x20cm;			
	includes: temperature control unit, cam casting base, glass plates with 1mm bonded spacers, 2x 24-sample combs and gradient mixer – 240 VAC version			
VS20WAVE-DGGETC	Temperature Control Unit			
GM100	Gradient Mixer, 100ml			
VS20WAVE-DGGEKIT	VS20-WAVE Package; includes VS20-DGGE, STIR, MU-D01, MU-S16, powerPR0500			
CSL-DSTIR*	Magnetic Stirrer, 19 x 19cm	CLIQS	1D image analysis with band pattern matching	
MU-D01	Single Channel Peristaltic Pump	CLIQS 1D Pro	1D image analysis with band pattern matching between	
MU-S16	Silicon tube I.D. 1/8", 25 ft (for peristaltic pump		different gels	
powerPR0500	powerPRO 500 Power Supply, 500V, 800mA, 300W		* For 110V units add \$ to the order code	



Polycarbonate housing with aluminium base

140 x 191 x 84mm

1kg

140 x 191 x 84mm

1kg


Output range

Stackable

Rated voltage

Weight

Dimensions (WxDxH)

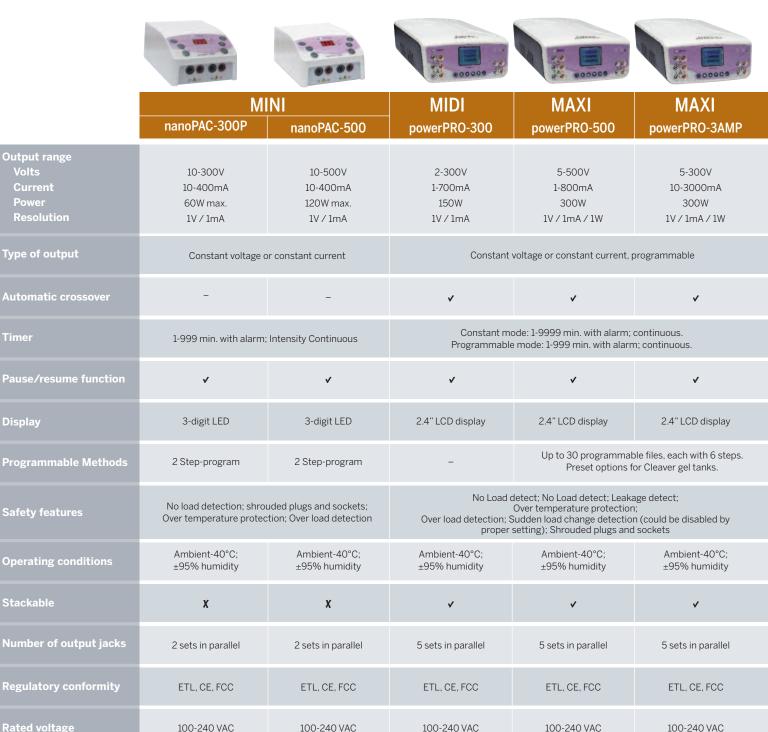

215 x 335 x 104mm

2.1kg

Flame retardant ABS-plate design

215 x 335 x 104mm

2.1kg

215 x 335 x 104mm

2.1kg





Whether you require a power supply for routine horizontal DNA agarose gel electrophoresis or techniques as technically demanding as SSCP analysis within a large format vertical, or first dimension IEF using IPG strips, Cleaver Scientific can meet your requirements with its comprehensive range of power supplies. Each power supply benefits from a small footprint area and compact design, while explanatory self- prompting menus facilitate easy set-up. Furthermore, these power supplies adhere to IEC 61010 – one of the world's most stringent electrical safety standards.



The PowerPro series of power supplies is a versatile range designed to power both multiSUB horizontal and omniPAGE vertical electrophoresis tanks.

Each power supply has a 2.4" LCD display showing the available options as well as current running conditions. Constant voltage, current and power options are available as well as pre-programmed or customer programmed conditions allowing users to save and repeat their experiments for exceptional reproducibility. The 5 power outlet pairs mean less power supplies are needed for the same number of tanks, saving cost and time when running multiple tanks simultaneously.

PowerPro 300 is perfect for our smaller tanks and can run up to 5 multiSUB MIDI units or omniPAGE Mini's. For Higher voltage runs the PowerPro500 offers a maximum 500V output, perfect for the larger horizontal and vertical units. For blotting, where high current can be required, the PowerPro3AMP supplies a maximum 3000mA to allow multiple blots to process simultaneously.





- Routine horizontal electrophoresis using multiSUB Mini, Midi and Choice.
- Vertical Electrophoresis using omniPAGE Mini.

TECHNICAL	S PECIFICATION	s		
Cat. No.	powerPRO300	powerPR0500	powerPRO3AMP	
Max. Voltage Max. Current Max. Watt	5 - 300V / 1V 1-700mA / 1mA 150W / 1W	5-500V/1V 1-800mA/1mA 300W/1W	5 - 300V / 1V 10-3000mA / 10mA 300W / 1W	
Output Type	Constant	voltage / Current	t / Power ——	
Program -	–– Pre setting; Up	to 6-step, 30 pro	grammed files ——	
Timer	Constant n	node: 9999 (min)	with alarm ———	
Programmable mode: —— 999 (min) with alarm ——				
Rated voltage		100 - 240V		

Ordering Information			
powerPRO300 Midi Power Supply, 300V, 700mA, 150W	CSL-4-4 Power supply adapters, 4mm to 4mm		
powerPRO500 Midi Power Supply, 500V, 400mA, 3000W	CSL-4-2 Power supply adapters, 4mm to 2mm		
powerPRO3AMP Maxi Power Supply, 300V, 3000mA, 300W	CSL-2-4 Power supply adapters, 2mm to 4mm		





nanoPAC Mini

The new and improved nanoPAC Mini Power supply series comprises ultra-compact and economical units ideal for use with DNA/RNA (Horizontal) and protein (vertical) electrophoresis systems.

A simple two step feature which allows users to set a programmable change in voltage/current/time during the run provides increased versatility. Simply press MODE and program STEP 1 and STEP2 to the desired setting and then start and the nanoPAC will automatically run the steps in sequence.

With enhanced features, such as a maximum constant voltage up to 300 or 500V and maximum constant current output of 400mA they are capable of running all horizontal multiSUBTM systems and vertical omniPAGETM mini. The nanoPAC-500 is also capable of running the VS10W & VS20WAVE vertical units, as well as

horizontal and vertical gel tanks from other manufacturers, These can be set on a continuous run or timed setting up to 999 minutes. The nanoPAC's user-friendly interface is easily adjustable in 1V and 1mA increments, making it perfect for separations where precise settings are required. Two pairs of parallel power terminals, allows two electrophoresis units to be run simultaneously, saving time.

KEY FEATURES

- Ultra compact size saves bench space
- Enhanced in-built safety features
- Conspicuous 3-digit LED
- Alarm function
- Wipe-clean polycarbonate housing



Consort

All Consort Maxi Series (EV2xxx/EV3xxx) power supplies have four output terminals for up to four simultaneous runs. Powerful microprocessor control allows complex programming, while manual mode permits the setting of voltage, current, power and time for routine electrophoretic runs. The parameters may also be changed temporarily without interrupting the run.

EV2000 series -

is a high-end mid-power range suitable for most applications such as larger tanks or multiple smaller tanks. A robust 150W power supply in a small housing and designed to be easy to use.

EV3000 series -This high-power, high-end power supply series has five versions. The 3000V and 6000V version

This high-power, high-end power supply series has five versions. The 3000V and 6000V version have a special low current mode for IEF applications. small housing and designed to be easy to use.

- Constant voltage, current or power
- Automatic crossover
- Overload Protection
- Short Circuit Protection



ORDERING INF	ORMATION								
nanoPAC-300P	Mini Power Supply	300V	400mA	60W	CSL-4-4	Power supply adapters, 4mm to	4mm		
nanoPAC-500	Mini Power Supply	500V	400mA	120W	CSL-4-2	Power supply adapters, 4mm to	2mm		
					CSL-2-4	Power supply adapters, 2mm to	4mm		
EV2310	Consort Power Supply	300 V	1000 mA	150 watts	EV3610	Consort Power Supply	600 V	1000 mA	300 watts
EV2650	Consort Power Supply	600 V	500 mA	150 watts	EV3150	Consort Power Supply	1200 V	5000 mA	300 watts
EV2230	Consort Power Supply	1500 V	300 mA	150 watts	EV3330	Consort Power Supply	3000 V	300 mA	300 watts
EV2320	Consort Power Supply	3000 V	150 mA	150 watts	EV3620	Consort Power Supply	6000 V	150 mA	300 watts
EV3020	Consort Power Supply	300 V	2000 mA	300 watts					

Power Supply SELECTION GUIDE



	Apparatus	Sample Quantity	Recommended Power Supply
Horizontal Agarose Electrophor	resis		
	multiSUB Midi	100 x 100 x 5mm, max.	
	multiSUB Choice	150 x 150 x 5mm, max.	
	multiSUB Choice ST	150 x 250 x 5mm, max.	
	multiSUB Maxi	200 x 200 x 5mm, max.	nanoPAC300, nanoPAC500
	multiSUB Screen	260 x 320 x 5mm, max.	or powerPR0300
8	mini Rapide	100 x 80 x 5mm max.	
	multiSUB Midi 96	100 x 120 x 5mm max.	
	multiSUB Mid 96 ST	101 x 240 x 5mm max.	
Polyacrylamide Vertical Gel Elec	ctrophoresis		
\cap \cap	omniPAGE Mini	80 x 85 x 1mm, 4 gels	Diagon Diagon Brosso
	omniPAGE Mini Wide	160 x 85 x 1mm, 2 gels	nanoPAC300, nanoPAC500 or powerPR0300
	omniPAGE WAVE Maxi	160 x 175 x 1mm, 2-4 gels	powerPR0500 or nanoPAC500
	omniPAGE Maxi Wide	280 x 200 x 1mm, 2 gels	powerPR0500
Western Blotting			
	omniBLOT Mini/Blotting Insert	80 x 85 x 1 mm, 4 gels	DD0000 DD0044D
9	omniBLOT Mini Wide/Blotting Insert	160 x 85 x 1mm, 4 gels	powerPR0300 or powerPR03AMP
	omniBLOT Maxi/Blotting Insert	160 x 175 x 1mm, 4 gels	powerPR0300, powerPR0500 or powerPR03AMP
n	SD10 Mini	100 x 100 x 2/5mm,1 gel	DDCCALLE
-	SD20 Maxi	200 x 200 x 2/5mm,1 gel	powerPR03AMP
Comet Assay, SCGE			
	COM10	25 x 75mm, 10 slides	510000
	COM20	25 x 75mm, 20 slides	nanoPAC300, nanoPAC500 or powerPR0300
-	COM40	25 x 75mm, 40 slides	22222
	COMPAC-50	25 x 75mm, 50 slides	powerPR0300
Cellulose Acetate Electrophores	sis		
6.00	CSL-CELLAS	25 x 140mm–170 x 170mm, Cellasgel strips max. 250 M thickness; or CellasMEM membranes (all types)	nanoPAC300, nanoPAC500 or powerPRO300
IEF, first-dimension 2-D		'	
0	CSL_IEF	3 x 240 x 1mm, max. 12 strips	EV2320
	Maxi Tube Gel	180 x 1/1.5mm tubes, 10 max.	
	Mini-Wide Tube Gel	80 x 1/1.5mm tubes	EV3150
	Mini Tube Gel	80 x 1/1.5mm tubes	
Large Format (Sequencing)			
9	CSQ20	160 x 500 x 0.35mm	EV2220 or EV2220
	CSQ33	290 x 410 x 0.35mm	EV2230 or EV2320






omnidec Gel Documentation

The omniDOC systems offer high performance gel documentation and analysis at affordable costs.

By providing many of the features incorporated within the highest specification systems, but without the added price premium, the omniDOC system presents a simple but sophisticated imaging solution. A high resolution 5 mega pixel CMOS sensor with slide-out UV transilluminator, and optional blue epiillumination module and white light table, makes the omniDOC suitable for imaging most fluorescent and colorimetric gels. Imaging applications are made


easy by a pre-focused camera that requires little or no manual adjustment, while simple image acquisition and analysis software guides the user through every step of the gel documentation process. A front filter and springloaded cover facilitates safe and convenient gel inspection. omniDOCs are constructed from corrosion resistant ABS for superior durability.

- Pre-focused 5 mega pixel camera with auto-exposure for almost instantaneous high resolution gel imaging
- 6mm lens, F1.2 aperture size, with manual adjustment
- Interchangeable filter 620nm ethidium bromide filter as standard; 520, 560 and 580nm filter options for runSAFE, SYBR stain and other fluorescence applications
- Internal white LED helps gel positioning and focusing
- Slide-out 312nm transilluminator
- Large 21x26cm imaging area



- 620nm filter (standard) EtBr, Gel Red & SafeView Classic
- 520nm filter (SYBR) Gel Green, Midori Green, run- SAFE, SYBR Green I & II, SYBR Gold & SYBR Safe
- 560nm filter (yellow) as per 520nm filter but also including SYPRO Orange
- 580nm filter (orange) EtBr, Gel Green & Red, Safe- View Classic; SYBR Green I & II, SYBR Gold & Safe; SYPRO Orange & Ruby





DNA – use the slide-out UV transilluminator to capture images of DNA gels stained with EtBr and SYBR dyes



Blue light – LED epiillumination module allows visualisation of some stains with better clarity and without DNA damage



White light table – use plug- in white light table to view coomassie blue and silver stain protein gels; may also be used to view tissue slides and autoradiographs



Autoradiographs – high resolution 5MP camera captures images in high detail, especially when scrutinising separation between closely located bands or spots



Chemiluminescence **Documentation Systems**

Cleaver Scientific supplies a range of chemiluminescence documentation systems for both chemi and fluorescence imaging. All systems include intuitive acquisition and analysis



software to make capturing and analysing gels as easy as possible. To see the latest range, visit the Cleaver Scientific website here: or contact our sales team at sale@cleaverscientific.com.



OMNIDOC IMAGE CAPTURE AND ANA	LYSIS SOFTWARE - USE THE INCLUDED SOFTWARE TO
Acquire, store and manipulate images	Analyse, document and quantify gels
Use intuitive touchscreen control for image acquisition in a few simple steps	Following image acquisition use the intuitive touchscreen control software for analysis
Adjust the exposure time, altering the UV intensity or manipulating the iris on the camera if required	Load the newly acquired image, or select one stored previously in TIFF, JPEG, BMP or GIF image format
Select your light source: UV, blue or white light	Select the gel or dot blot type from one of four options
Use Toolbox function to change default settings for excitation source & exposure time, or apply advanced features like saturation detection & date stamp	'Tap and drag' rectangular boxes on your tablet to define the sample lanes to be analysed
Image Freeze – minimise UV damage nucleic acid gels by 'freezing' the gel image and switching off the transilluminator ahead of image capture or printing	Set the level of sensitivity and define the base line for subtraction
Acquire and save image for	Perform density analysis
Analysis	And then molecular weight analysis; use software to save as an image file format of your choosing or export into Microsoft Excel as a CSV file for further data analysis

TECHNICAL SP	PECIFICATIONS
UVTransilluminator	312nm, 21x26cm (WxL); 6x8W TUBES
RESOLUTION	5 MEGA PIXELS (2592x1944 PIXELS MAX)
SENSOR	CMOS, 1/2.5". Monochrome
LENS	5MM FOCAL LENGTH; APERTURE F1.2
IMAGE BIT-DEPTH SENSOR	12-BIT (0-4095 GREY LEVELS)
FILTER CAMERA	620nm EtBr (standard); optional 520, 560, 580nm filters
IMAGE STORAGE	PC or LAPTOP
CONNECTION TO OPERATING DEVICE	USB TO PC
OPERATING SYSTEM REQUIREMENTS FOR SOFTWARE	WINDOWS® 7 (64BIT & 32BIT) / XP / VISTA
DARK ROOM ASSEMBLY DIMENSIONS	410×405×570mm (WxDxH)
FRONT PANEL DISPLAY	LED
VIEWING WINDOW	560nm universal orange filter
WHITE LIGHT	6x1W LED (STANDARD) FOR GEL POSITIONING
WHITE LIGHT TABLE (OPTIONAL)	21x26cm filter; connects internally to darkroom
BLUE LED EPI-LLUMINATION MODULE (OPTIONAL)	EXCITATION WAVELENGTH 470NM; CONNECTS INTERNALLY TO DARK ROOM
Safety	SAFETY INTERLOCK SWITCH ON FRONT DOOR PANEL; DISCONNECTS UV TRANSILLUMINATOR ON OPENING; COMPLIES WITH CE, FCC STANDARDS
USB Port	For PC
Power Rating	Dual voltage: 110-230 VAC
WEIGHT	25кд

ORDERING INFO	Ordering Information		
OMNIDOC	omniDOC Gel Documentation System with 620nm (EtBr) emission filter & 312nm UV transilluminator*		
OMNIDOCSAFE	omniDOC plus Blue LED Epi-illumination Module (OMNIDOC-BL) and 520, 560 & 580 filters (OMNIDOC-EB, -AF560 & -AF580)*		
OMNIDOCPROSAFE	omniDOC plus Blue LED Epi-illumination Module (OMNIDOC-BL) and 520, 560 & 580 filters (OMNIDOC-EB, -AF560 & -AF580) and white Light table (OMNIDOC-WLT)*		
omniDOC Accessoi	res		
OMNIDOC-WLT	Optional White Light Table	OMNIDOC-AF580 Amber Filter, 580nm	
OMNIDOC-BL	Optional Blue Light modules	OMNIDOC-AF560 Amber Filter, 560nm	
OMNIDOC-SYBR	Optical SYBR Green Filter	OMNIDOC-F1 Viewing window, Amber Filter, 560nm (Supplied as standard)	
OMNIDOC-EB	Optical EtBr Filter (Supplied as standard)		



KEY FEATURES

- 18 mega pixel digital camera*
- Image visualised within a large 8" TFT colour monitor
- Light weight compact hood with easy access door and built-in inner lights
- Integral microswitch switches off UV Transilluminator and turns on internal light
- Can be used without a computer
- Includes flash card, flash card reader and ethidium bromide filter
- Available on its own with camera and darkroom, or as a complete gel documentation system with transilluminator, either with or without software



microDOC is a simple, inexpensive and ultra compact gel documentation system. It includes a digital camera with CCD sensor and the latest image processor to guarantee superb resolution of 18 mega pixels*. For added convenience, limited space and budget requirements, microDOC can be used computer free.

The image is viewed from a large 8" TFT colour liquid crystal display. A variety of images can be captured in colour, clearly and easily, from agarose and other fluorescent gels, colorimetric gels, auto radiography film and blotting membranes. The system is fitted with an ethidium bromide filter and has a safety switch to turn off the UV Transilluminator when the door is opened. This also activates internal light for convenient gel manipulation.

convenience







separate power and light switches

TECHNICAL SPECIFICATIONS CAMERA: EFFECTIVE PIXELS: 18 MILLION LARGE APS-C CMOS SENSOR CCD. 5 x zoom /4x digital **Z**оом: MAX. APERTURE: F/3.5 - F/5.6 SHUTTER SPEED: 30 - 1/4000s. (TOTAL RANGE) FILE FORMATS: RAW, TIFF-RGB, JPEG STORAGE MEDIA: 4GB MEMORY CARD: OPTIONAL WI-FI MEMORY CARD COMPUTER INTERFACE: HI-SPEED USB (MINI-B COMPATIBLE) NTSC/PAL VIDEO OUT: 8.0" TFT LIQUID CRYSTAL SCREEN 600 x 800 PIXELS DISPLAY FORMAT: BRIGHTNESS 350 cd/MM2 CONSTANT RATIO 300:1 NTSC / PAL / SECAM MODE, DISPLAY MODE AUTO SWITCHING CHAMBER, MICRODOC: 290 x 220 x 320mm (WxDxH) HOOD DIMENSION: WEIGHT: 6.1 KG INNER WHITE LAMP: 2x 3W LED TUBES SAFETY DOOR SWITCH: SHUTS DOWN UV TRANSILLUMINATOR VOLTAGE RATING 110~220V

BASIC

MICRODOC

microDOC
BASIC is a simple low-cost system comprising a lift-off dark room hood and 18 megapixel digital camera, through which the gel is viewed directly. This system can be supplied with optional CLIQS
Analysis Software



Analysis Software and any one of the 21x21cm transilluminators

ORDERING INFORMATI	ON		
SYSTEM ONLY	INCLUDING TOTALLAB 1D ANALYSIS SOFTWARE	GEL DOCUMENTATION	SYSTEMS
CSL-MICRODOC	CSL-MICRODOC1D	Compact Gel docume	entation system
CSL-MDOCUV312	CSL-MDOCUV3121D	microDOC System wi	th UV Transilluminator (UVTS312)
CSL-MDOCUV254	CSL-MDOCUV2541D	microDOC System wi	th UV Transilluminator (UVTS254)
CSL-MDOCUV365	CSL-MDOCUV3651D	microDOC System wi	th UV Transilluminator (UVTS365)
CSL-MD0CUV254/312	CSL-MDOCUV254/3121D	microDOC System wi	th UV Transilluminator (UVTS254/312)
CSL-MDOCUV254/365	CSL-MDOCUV254/3651D	microDOC System wi	th UV Transilluminator (UVTS254/365)
CSL-MDOCUV312/365	CSL-MDOCUV312/3651D	microDOC System wi	th UV Transilluminator (UVTS312/365)
CSL-MDOCBASIC	CSL-MDOCBASIC1D	microDOC Basic Syst	t em with lift-off dark room hood and camera only
Accessories			
CSL-PRINT	Mitsubishi Thermal Printer for use with Microdoc - 110-240V	CSL-PRTPAP	Replacement printer paper
CSL-MDOCEB	Microdoc ethidium bromide filter	CSL-MDOCWLB	White light box for Micro doc
CSL-MDOCSBRG	Microdoc SYBR filter		






CLIQS gel analysis software options are available for quantitative gel analysis following gel documentation. Each software option offers the highest level of automation currently available and guides the user step by step through the analysis process.

A user-friendly interface is split into four parts allowing the user to view within a single screen every aspect of gel quantitation, including the gel image, lane and band profiles, analysis data and the help menu. CLIQS gel quantitation and is suitable for all users regardless of their experience. More advanced CLIQS 1D PRO software is recommended for researchers performing in-depth lane relationship studies.

2D gel electrophoresis software




SpotQuest is software with basic functionality and easy to use 10-step workflow. It makes it easy for small laboratories and novice users to apply 2D gel electrophoresis as part of molecular biology or biochemistry research. It gives you a quick, simple, objective way to detect and measure changes in protein samples using 2D gel image analysis.

Technical Specification	CLIQS	CLIQS 1D 21CFR	CLIQS 1D Pro
Automatic detection of lanes and bands	v	v	~
Automatic background subtraction	✓	v	v
Image manipulation tools	✓	✓	v
Molecular Weight Calibration	v	v	v
Quantity calibration and normalisation	~	~	~
Profile deconvolution	✓	✓	✓
Rf calibration	✓	✓	✓
Band pattern matching - single gel	✓	✓	✓
Band pattern matching - lines across multiple gels			v
BAND PATTERN QUERIES			✓
Dendrogram - single gel	✓	v	v
Dendrogram - lanes from multiple gels			~
Data archive and search facility			v
Classification and identification tools			v
Reports	v	v	v
Supports compliance with 21CFR part 11		v	
Array analysis module	✓		
Colony counting module	~		
Toolbox for general analysis	v		



for more information on CLIQS analysis software




CLIQS is the software supplied exclusively with all microDOC1D models.


CLIQS features a user-friendly interface and help menu that provide a simple, guided workflow for fast and accurate quantitation and calibration of 1D gels and western blots. Main benefits include:

- The capacity to review each step within the automated workflow analysis, and manually intervene or edit if desired
- Highly developed algorithms which accurately detect lanes and bands even on distorted gel images
- A range of visualisation tools that facilitate further examination of lane and band data to verify results, including band calibration from Molecular Size standard lanes and accurate quantitation derived from known band volumes.

CLIQS includes a 1D module plus three modules for array analysis; colony counting and 2D spot measurement and general feature-based image analysis. The array analysis module can automatically detect up to 1536 wells or arrays spots and may also be used to quantify dot and slot blots. Array analysis and Toolbox modules also include multiplex analysis functionalities.



CLIQS - Array Analysis



TotalLab 1D / CLIQS - Multiplex Analysis

CLIQS 1D Pro is more advanced analysis software used primarily for band-pattern matching within individual DGGE, SSCP and RFLP gels that are important for cultivar experiments, evolutionary biology and population genetics. CLIQS 1D Pro has a powerful band matching feature, which is flexible and easy to use, while visual tools show the results of matching and identify similarities within an individual gel, including lane clustering via dendrograms. More info on our software range can be found on our website.

ORDERING INFORMATION

CLIQS Core Laboratory Image Quantification Software (1D Image Analysis of DNA & protein, Western blotting . Colony counting and basic 2D spot measurement

CLIQS1DPRO Core Laboratory Image Quantification PRO Software (Accurate comparison of banding patterns in samples across multiple gels/experiments)

CLIQS1D21CFR Core Laboratory Image Quantification PRO Software (Accurate comparison of banding patterns in samples across multiple gels/experiments) 21CFR compliance for GLP/GMP laboratories Automated detection algorithms for fast and accurate image analysis

SPOTQUEST 2D Gel Image Analysis






The advanced SafeVIEW-MINI2 offers a safe way to view and document gel samples.

With a compact design, this transilluminator serves as the perfect workstation for viewing and working with fluorescently-stained nucleic acid gels. The blue light source has the added advantage that it does not cause damage to DNA or RNA that would normally be associated with UV light. A separate 580nm amber

filter screen and a thinner lightweight casing combined with an imaging size of 153 x 153mm means it can be used to view small to medium sized gels and is compatible with multiSUB mini, midi and choice Horizontal DNA gel tanks. safeVIEW-MINI2 can also be used with our GDH-BASIC imaging hood to reduce background light letting you capture gel images with your mobile phone camera.



KEY FEATURES

- Thinner and more lightweight body
- Easy to carry in between labs
- Aluminium alloy casing design
- Excellent heat dispersion
- Energy saving
- 470nm harmless blue light for direct human contact








TECHNICAL SPECIFICATIONS 200x200x13.9 mm DIMENSIONS (WxLxH) VIEWING AREA 153 х 153 мм BLUE LIGHT SOURCE FLAT BED ILLUMINATOR BASE DESIGN BLUE LIGHT WAVELENGTH 470nm AUTOMATIC SHUTDOWN APPROX. 6 MIN MATERIAL ALUMINIUM ALLOY Power Rating DC 12V, 2A Approx. 760g WEIGHT

GDH Basic Hood

safeVIEW

The safeVIEW Blue LED transilluminator offers a safe way to view and document samples. This light source also has the added advantage that it does not cause damage to DNA or RNA that would normally be associated with UV light. The system uses Blue LED light to excite both traditional dyes such as Ethidium Bromide as well as safe stains such as runSAFE.



KFY FFATURES

- No DNA damage to samples
- Safer for user No UV light
- High Purity LED light
- Strong Metal enclosure with stainless steel filter frame
- Fast start up

FILTER SIZE 21 x 21cm	
LIGHT SOURCE 470NM BLUE LED'S	
SIZE 340 x 270 x 130mm	
Wеіднт 5Kg	
VOLTAGE 110 - 240V (SELECTABLE)	

Ordering Information				
SAFEVIEW-MINI2 Blue Light Transilluminator 15.3 x 15.3cm, with filter and Hood	SAFEVIEW safeVIEW BLUE Light Transilluminator, 21 x 21cm			
GDH-BASIC Gel Documentation Hood - BASIC - No Camera. (Use with Phone)	CSL-UVPS22 UV Transparent Cutting Platform 22 x 22 cm			
GDH-BASICKIT GDH-BASIC and SAFEVIEW-MINI2	CSL-UVPS27 UV Transparent Cutting Platform 22 x 27 cm			



Z UV Transilluminators

EZEE UV Transilluminators offer an ultra-violet light source for the analysis of fluorescently stained electrophoresis gels.

Available in single and dual wavelength formats, in 21x21cm and 21x26cm sizes, EZEE transilluminators are supplied either as standalone units or with the microDOC, as part of a fully integrated gel documentation system.



DuoView

The duoVIEW combines UV and Blue light illumination, allowing a wide range of fluorescent DNA stains to be visualised. 470nm Blue LEDs combined with an orange filter allow the imaging of new generation "Safe" stains such as runSAFE, which UV illumination and filters allow traditional stains such as Ethidium Bromide.





Gel Dryer

With a drying area of 21 x 31cm, Midi Gel Dryer can dry six 10 x 10cm gels or a single larger gel. Maxi Gel Dryer with a 35 x 45cm drying area can dry twelve 10 x 10cm mini gels simultaneously.



KEY FEATURES

- Three Wavelength options: 254 / 312 / 365 nm
- Two Dual wavelength models
- High efficiency reflector
- Hi / Lo intensity switch

TECHNICAL SPECIFICATIONS		
FILTER SIZE:	21 х 21см; 21 х 26см	
LIGHT SOURCE:	8W x 6 TUBES	
UNIT DIMENSIONS (WXLxH):	34 х 29.5 х 10см	
FILTER SIZE:	26 x 21 cm	
LIGHT SOURCE:	8W x 8 TUBES	
UNIT DIMENSIONS (WXLXH):	34 х 29.5 х 10см	

- UV & Blue light technology in one transilluminator
- Single or dual wavelength models available

TECHNICAL SPECIFICATIONS				
FILTER SIZE	21 x 21cm			
LIGHT SOURCE	470nm BLUE LED'S OR UV Single Wave (8W x 5 tubes) OR UV dual Wave (8W x 9 Tubes)			
Intensity Switch	HIGH (100%)/ Low (70%) SINGLE			
Size	400 x 190 x 350мм			
WEIGHT	10.5Kg			
Voltage	110- 240V (SELECTABLE)			

TECHNICAL SPECIFIC	CATIONS	
TEMPERATURE INCREMENT	0.1°C	
Temperature Calibration	YES	
TEMP UNIFORMITY	±0.2°C	
TIMER	1-999 mins	
Drying area Midi Maxi	21 x 31см 35 x 45см	
OPERATING TEMP. RANGE	Амвієнт то 90°С	
DIMENSION WXLXH MIDI	30 x 36 x 8см 44 x 50 x 8см	

ORDERING INFO	RMATION		
CSLUVTS254	UV Transilluminator small, 21 x 21 cm, 254 nm	CSL-UVSCRN	UV to white light Transilluminator screen converter
CSLUVTS312	UV Transilluminator small, 21 x 21 cm, 312 nm	CSL-MDOCWLB	White light box
CSLUVTS365	UV Transilluminator small, 21 x 21 cm, 365 nm	CSLTxxx	8W UV bulb (xxx = 254 nm, 312 nm or 365 nm)
CSLUVTSDUO	UV Transilluminator small , 21 x 21 cm, 254/365 nm	DUOVIEW254	UV254 & Blue Light Transilluminator, 21 x 21cm (110V-240V)
CSLUVTSDU0312	UV Transilluminator small , 21 x 21 cm, 254/312 nm	DUOVIEW312	UV312 & Blue Light Transilluminator, 21 x 21cm (110V-240V)
CSLUVTSDU0365	UV Transilluminator small , 21 x 21 cm, 254/365 nm	DUOVIEW365	UV365 & Blue Light Transilluminator, 21 x 21cm (110V-240V)
CSLUVTS254L	UV Transilluminator large , 26 x 21 cm, 254 nm	DUOVIEW254/312	UV254/312 & Blue Light Transilluminator , 21 x 21cm (110V-240V)
CSLUVTS312L	UV Transilluminator large , 26 x 21 cm, 312 nm	DUOVIEW254/365	UV254/365 & Blue Light Transilluminator, 21 x 21cm (110V-240V)
CSLUVTS365L	UV Transilluminator large , 26 x 21 cm, 365 nm	CSL-GDVH	Midi Gel Dryer, 21 x 31 cm
CSLUVTLDUO	UV Transilluminator large , 26 x 21 cm, 254/365 nm	CSL-GDVH35	Maxi Gel Dryer, 35 x 45 cm
CSLUVTLDU0312	UV Transilluminator large , 26 x 21 cm, 254/312 nm	MZ2C	VacuuBrand Vacuum Pump, MZ 2C + 2 AK



rockers and shakers

Four different models of rockers and shakers are available, with each offering benefits that include: outstanding uniform motion and low noise; microprocessor based keypads with digital control and display of preset time, continuous time, action scale and speed; and high quality stainless steel platforms with pop-on / pop-off installation holes to secure samples.

All models are lightweight and portable for easy transportation from the bench to incubator and cold room alike, while additional platforms may be added for increased capacity.



KEY FEATURES

- Orbital, reciprocal & rocking models with 30x30cm shaking-platform & non-slip rubber mat
- 2-D/3-D shaker accommodates optional hybridisation water bath
- Additional platforms double capacity
- Dimpled mat supports 1.5ml, 15ml and 50ml tubes



TECHNICAL SPECIF	ICATIONS			
Cat. No.	CS-NOR	CS-NRC	CS-NRK	CW-23
	Orbital, single direction or alternating, bi-directional ckwise & anticlockwise shaking	Linear, Reciprocating	Rocking	2-D or 3-D Combi
Application	aeration of samples, 0.5 to 5ml in volume, within multi-well plates, standard dishes and petri dishes	incubation of western blots and initial mixing of reagents	prevents gels and membranes from drying out during staining, blocking and antibody incubations	ideal for gentle, foam-free washing of delicate cell lines within tissue culture
Stroke Length/Tilt Angle	20mm	19mm	12°	8°
Orbits/Shaking Cycle	0.1-10.0	-	-	-
Speed	0-200 rpm	5-100 rpm	5-100 rpm	5-100 rpm
Timer	1-9999 mins, 1 min increment	1-9999 mins, 1 min increment	1-9999 mins, 1 min increment	1-9999 mins, 1 min increment
Controller Display	Digital microprocessor 4 digital red LED	Digital microprocessor 4 digital red LED	Digital microprocessor 4 digital red LED	Digital microprocessor 4 digital red LED
Operating Temperature	4-40°C	4-40°C	4-40°C	0-50°C
Carry Capacity	10 kg	15 kg	15 kg	15 kg
Optional Stacking Platform	m Yes	Yes	Yes	Yes
Special Functions	2 way direction			Angle 0-25°
Platform Dimension	30 x 30cm	30 x 30cm	30 x 30cm	33 x 33cm
Operating Power	110 / 220V	110 / 220V	110 / 220V	110 / 220V
Weight	7 kg	7 kg	8 kg	10 kg

KEY FEATURES

- The perfect speed and tilt for blotting and gel staining
- Three-dimensional motion
- Designed for use with Blot Boxes

TECHNICAL SPECI	Technical Specifications				
Speed	18rpm (115v) / 20 rpm (230v)				
Motion	3-D, nutating				
Tilt Angle	5°				
Platform Size (WxD)	20x16.5cm				
Ambient Operating Range	4-65°				
Dimension (WxDxH)	20.3x17.8x10.5cm				
Weight	0.88kg				
Electrical	115/230V 50/60Hz				



Blot Boxes

These gel staining / blotting boxes are available in 4 sizes and are the ideal accessory for incubating blots or staining gels.

3D Shaker

MiniMix combines the motions of orbital shaking and rocking to produce a gentle, but thorough, 3-D action that is perfect for antibody incubation of western blots and staining gels. This allows users to work with minimal volumes, thus conserving valuable probes and antibodies. The MiniMix's compact and light weight design allows it to be moved around the lab where needed.

Ordering Information				
CS-NOR	Orbital shaker with 30 x 30cm platform and non slip rubber mat	CW-23	Combination 3-D shaker with 3-D shaking and rocking for maximal fluid	
CS-NRC	Reciprocal shaker with 30 x 30cm platform and flat non slip rubber mat		movement; includes 33 x 33cm platform and flat non slip rubber mat	
CS-NRK	Rocking Shaker with 30 x 30cm platform and flat non slip rubber mat	CW-WB	Hybridisation Water Bath (ambient to 95°C) for use with CW-23	
CSL3DSHAKER*	MiniMix 3D Shaker with 20x16.5cm tray and non-slip rubber mat	CSL-BB12X12	Gel/Blot box, 12 x 12cm, 1/pack	
CSL-BB9X6	Gel/Blot box, 9.1 x 6.6cm, 3-5ml capacity, 10/pack	CSL-BB20X16.5	Gel/Blot box, 20 x 16.5cm, 1/pack	
CSL-BR11X8	Gel/Blot hox 11.7 x 8.9cm 6-10ml canacity 10/pack	* For 110\/ unito a	add \$ to order code	



vortex mixer

This variable speed Vortex Mixer combines fast, efficient mixing with minimal vibration. Unlike other vortex mixers using elliptical orbits, its true circular orbit facilitates uniform sample-vortexing even at low speed.

The Vortex head accepts many different tube sizes, while optional heads for microplates, microtubes, PCR strip tubes, 15ml and 50ml tubes and blood vials are available. The unit may be used in 'touch' or continuous mode: 'touch' mode being activated by simply depressing the sample head and then stopped by releasing the pressure. An optimised counter balance system minimises vibration and movement of the unit during operation, whereas its lightweight construction and small footprint allows it to be readily transported and used in areas where space is restricted.



KEY FEATURES

- Powerful, reliable motor with optimised counter balance
- Circular orbit for effective vortexing at any speed
- CombiCup head accepts a variety of tube sizes

TECHNICAL SPECIFICATIONS

115V

0 - 3400 RPM

0 - 2850 RPM

Versatile head attachment accessories for microplates and different tube sizes







\$0200-22 \$0200-23



S0200-24



S0200-25



S0200-26



S0200-27

230V Operating Modes **Touch or Continuous** Ambient Operating Range 4 - 65°C Dimensions (WxDxH) 14cm x 16cm x 13cm Weight 2.2Kg Electrical 115V or 230V, 50/60Hz

Speed Range

heaters and stirrers

With a durable and chemically resistant ceramic surface, Cleaver Scientific's digital hotplate, stirrer and hotplate stirrer are the ideal solution for demanding users in all laboratory environments. The minimal footprint (18 x 26 cm) allows for use in crowded spaces such as fume hoods while the 16.5 cm square plate makes these units compatible with a wide range of commonly used vessels such as beakers, bottle and conical flasks. Fast and precise adjustment of speed and temperature is achieved with advanced microprocessor technology, and a large backlit LCD display offers easy viewing of current parameters. A safety LED indicates temperatures over 50°C. An optional external thermometer and support rod allows temperature control of the sample by direct feedback to the microprocessor, maintaining temperature to within ±0.5°C.

- Large, backlit LCD display
- Ceramic work surface, 6.5 x 6.5 in.
- Safety LED indicates hot surface
- Control actual temperature (with optional probe)
- Three models: heat-stir, heat only or stir only





TECHNICAL S	PECIFICATIONS
Speed Range:	200-1500 rpm (stirring units only)
Temp. Range:	Ambient +5° to 380°C (heating units only)
Platform:	16.6 x 16.5cm
Control:	Quick Adjustment Knobs
Dimensions:	18(W) x 26(D) x 10.1(H) cm
Electrical Data:	120V, 60 HZ / 230V, 50/60 HZ

ORDERING INI	ORMATION		
CSLVORTEX*	Vortex Mixer with general purpose head	CSL-S0200-23	for 8 x 15ml and 8 x 12/13mm Diam. tubes
Optional Head Att	achments	CSL-S0200-24	for 6 x 50ml tubes
CSL-S0200-21	for 24 x 1.5/2.0ml tubes, 24 x 0.5ml tubes and 32 x 0.2ml tubes	CSL-S0200-25	for 12 x 1.5/2.0ml tubes, held horizontally
	(or 4 tube strips)	CSL-S0200-26	for 4 x 15ml tubes, held horizontally
CSL-S0200-22	for 1 microplate or 64 x 0.2ml tubes or 8 x 0.2ml tube strips	CSL-S0200-27	for 2 x 50ml tubes, held horizontally
CSL-DHOTPLATE*	Digital Hotplate , 16.5 x 16.5 cm - 230V	CSL-HOTPLATE*	* Hotplate , 19 x 19 cm
CSL-DSTIR*	Digital Magnetic Stirrer, 16.5 x 16.5 cm- 230V	CSL-HOTSTIR*	Hotplate Magnetic Stirrer, 19 x 19 cm
CSL-DHOTSTIR*	Digital Hotplate Magnetic Stirrer 16.5 x 16.5 cm 230V	CSL-STIR*	Magnetic Stirrer, 19 x 19 cm
TEMPROBE	Optional Temperature probe	SUPPROD	Optional Support Rod



hybridisation shaking incubators

With a compact, space-saving stackable design and temperature uniformity to within ± 0.2 °C, the hybridPRO hybridisation shaking incubators can be used for numerous temperature-dependent laboratory applications.

In addition to the standard entry level model, the hybridPRO range includes four incubator models, each supplied in one of four shaking platform formats – vortex, orbital, reciprocal or rocking - and customisable for nucleic acid hybridisation techniques with three rotisserie options. A large 3.6" colour-touchscreen control panel simplifies manipulation of speed, temperature and time within an easy to programme 3-line display, while a 32-bit microprocessor provides the temperature uniformity and stability necessary to support the most temperature-sensitive applications.



KEY FEATURES

- Digital Microprocessor Control
- Touch screen & Graphical interface
- Chamber Temperature: Ambient to 85°C
- Temperature Resolution ffl0.1°C
- Chamber Temperature Accuracy at 37°C ffl 0.2°C

TECHNICAL SPECI	FICATION	s
Display	3.5" 64K co	lour-TFT display
Controller	32-bit Micro	processor-control
Control interface	Touch scree	en & Graphical interface
Timer / Resolution		; Programmable s with alarm / 1 min.
Temperature Control Range / Resolution	Ambient +5	°C to 85°C / 0.1°C
Temperature Uniformity/ Accuracy at 37°C	ffI0.2°C	
Temperature Calibration	Yes	
Platform Dimensions	27x20cm (20x30cm f	or NHYBRIDVX)
Data-logging capacity	RS-232	
Operating Voltage	110/220V~ (Dual, selec	
Chamber Dimensions (w x d x h)	Inner Exterior	34 x 22.5 x 26cm 44 x 46 x 45cm
Weight	29kg	

ORDERING INFORMATION

Basic Incubator model with two stainless steel mesh-shelves

3-line colour touchscreen control.

- Typical Applications:
 Drying agar plates
 - Microbial plating techniques

With Vortex, Reciprocal or orbiatl platform
Three rotisserie options for hybridisation
Typical Applications:
• Enzyme assays
• Nucleic acid hybridisation

NHYBRID is a cost-effective system for homogeneous temperature control during routine incubations. Advanced ventilation design technology controlled by a digital microprocessor maintains temperature uniformity and stability to within ±0.2°C.

A stain-resistant interior protects against spillages, while removable stainless steel mesh-shelves ensure that airflow remains unrestricted. Incubations may be set in precise 0.1°C increments under a continuous or programmable timer function.

TECHNICAL SPECIFICATION	Technical Specification for Shaking-platform models only			
Incubator Model	NHYBRIDVX	NHYBRIDORB	NHYBRIDREC	NHYBRIDROC
Shaker motion	Vortex	Orbital (clockwise & anticlockwise)	Reciprocal	Rocking
Speed	50-1500rpm	0-200rpm	5-100rpm	5-100rpm
Optional rotisserie speed	5-100rpm	5-100rpm	5-100rpm	5-100rpm
Resolution	1rpm	1rpm	1rpm	1rpm

ORDERING IN ORMA	thon the state of		
CSL-NHYBRIDBASIC	HybridPro Incubator only with 2 stainless steel shelves	CSL-HYBRIDORB	Orbital Incubator with 270x200mm platform
CSL-HYB-SSMP	Stainless Steel Mesh Plate with 4 holders 32.5 x 34.5 cm	CSL-HYBRIDREC	Reciprocal Incubator with 270x200mm platform
CSL-NHYBRIDVX	Vortex Incubator with 200x300mm platform for 4 microplates	CSL-HYB-8RT	1x Rotisserie for 8x40mm glass tubes*
CSL-NHYBRIDROC	Rocking Incubator with 270x200mm platform	CSL-HYB-16RT	1x Rotisserie for 16x50ml disposable conical tubes*
CSL-HYB-SH	Supporting Holders for Stainless Steel Mesh Plate, pack of 4	CSL-HYB-24RT	1x Rotisserie for 24x15ml disposable conical tubes*
CSL-HYB-8RT	35 mm tube Rotisserie for 8x40ml glass tubes*	CSL-NHYB-P2720	Additional 27x20cm platform to double capacity of incubators
CSL-HYB-16RT	50 ml conical tube Rotisserie for 16 tubes*	CSL-NHYBFH-250	1x250ml flask holder for NHYBRIDORB & NHYBRIDREC platforms
CSL-HYB-24RT	15 ml conical tube Rotisserie for 24 tubes*	CSL-NHYBFH-500	1x500ml flask holder for NHYBRIDORB & NHYBRIDREC platforms
CSL-HYBBT40X150	1x Glass tube 40x150mm (d x I) for HYB-8RT	CSL-NHYBFH-250-SET	5x250ml flask holders for NHYBRIDORB & NHYBRIDREC platforms
CSL-HYBBT40X200	1x Glass tube 40x200mm (d x I) for HYB-8RT	CSL-NHYBFH-500-SET	4x500ml flask holders for NHYBRIDORB & NHYBRIDREC platforms
CSL-HYBBT40X300	1x Glass tube 40x300mm (d x I) for HYB-8RT	CSL-HYBBT40X150	1x Glass tube 40x150mm (d x I) for HYB-8RT
		CSL-HYBBT40X200	1x Glass tube 40x200mm (d x I) for HYB-8RT
		CSL-HYBBT40X300	1x Glass tube 40x300mm (d x I) for HYB-8RT

akralab

mini fixed volume pipettes

The Cleaver Scientific Mini Fixed Volume pipettes offer a simple low cost liquid handing solution.

Ideal for use in teaching and education institutes but can also be used in general laboratories where the application does not require such tight tolerances of the liquid to be dispensed.

Each model of pipette is the optimum size, just 130 mm in length to provide maximum user comfort over extended periods pipetting. The tip cone is unique being designed to accept both regular 200 μl tips or ultra micro tips up to 20 μl . The use of ultra micro tips for volume up to 20 μl enhances the accuracy and precision very significantly.

Completely autoclavable

All models are fully autoclavable at 121°C/0.1 MPa/20 min.





- Easy operation for right- and left-handed users
- Low pipetting forces
- Highly durable shaft
- No adjustment Required
- No calibration Required

Ordering Information									
Cat. No.	Description	Accuracy %	Coeff. Variation %	Cat. No.	Description	Accuracy %	Coeff. Variation %		
MFVP-5	Fixed Volume Mini Pipette 5μl, supplied with 1 tip	±1.5	±1.0	MFVP-50	Fixed Volume Mini Pipette $50\mu I$, supplied with $1 tip$	±0.4	±0.3		
MFVP-10	Fixed Volume Mini Pipette 10 μ I, supplied with 1 tip	±1.0	±1.0	MFVP-100	Fixed Volume Mini Pipette 100μl, supplied with 1 tip	±0.3	±0.3		
MFVP-20	Fixed Volume Mini Pipette 20 μ I, supplied with 1 tip	±0.5	±0.5	MFVP-200) Fixed Volume Mini Pipette 200μI , supplied with $1\mathrm{tip}$) ±0.5	±0.5		
MFVP-40	Fixed Volume Mini Pipette 40 μ I, supplied with 1 tip	±0.5	±0.5						

omniPET

omniPET-M is a motorised powered pipette filler with LCD display designed for cordless work with 0.5-100ml glass or plastic pipettes. Its lightweight handle, together with smooth pushbuttons and switches ensure effortless pipetting even during extensive use.

Different operational modes may be selected depending on pipetting volume and viscosity of liquid. Liquid aspiration speeds can be adjusted to HIGH or LOW while dispensing can be by gravity (GRAV) or supported by the pump (BLOW) which empties the pipette with blow out. To protect the unit against overfilling, omniPET-M is equipped



with both PTFE filters and a safety valve. To protect samples from cross contamination, filters and pipette holders can be easily exchanged and autoclaved.

The powerful re-chareable Ni-MH battery allows many hours of continuous work with the LCD display indicating when unit should be recharged. The battery is protected against overcharging by timing and thermal systems. omniPET-M is supplied with a charging stand.

KEY FEATURES

- Suitable for 0.5ml to 100ml pipettes
- Ergonomically shaped handle
- Sensitive valves for precise work with low volume pipettes low battery light indicator
- Protected by filter and safety valve
- Autoclavable nosepiece and pipette holder charging stand

TECHNICAL :	SPECIFICATIONS
Autoclavability	Nosepiece, pipette holder, filter
Filter	Hydrophobic PTFE 0.2µm
D: 11 1	Ol DI+:- O F 100I

ORDERING INFORMATION

Omnipet Omnipet Pipette filler (Without Charging Stand)

Omnipet-CS

OMNIPET

Cleaver

Charging stand for the omnipet

omnipette single and multi-channel pipettes



Ergonomically designed OMNIPETTE pipettes combine a slim handle, high accuracy and precision rates and robust structure, at very competitive prices.

Constructed from durable PP/PVDF they are noticeably lighter in weight than many competitive models and so are more comfortable to hold and operate for extended periods - even in the smallest hand. This feature will also reduce the incidence of operator fatigue and Repetitive Strain Injury.

A continuously adjustable volumeter with digital readout allows simple and accurate dispensing. The robust construction along with the low thermal coefficient of the body of each pipette will prevent hand heat affecting sample measurements and reproducibility, even in prolonged usage.

Completely autoclavable

For sensitive laboratory applications, all omniPETTE models are fully autoclavable at 121°C/0.1 MPa/20 min. Unlike many other "autoclavable" pipettes, omniPETTE require minimal accuracy checks and/or recalibration

Using a series of height adapters, the tip ejector position on the shaft is adjustable to allow the pipette's use with virtually all brands of tips.

Eight models of single channel omniPETTE cover all volumes from 0.1µl up to 10ml. omniPETTE requires minimal maintenance. Its precise, self-locking stainless steel micrometer accurately adjusts the stroke of the polished, acid-resistant piston*.

Each pipette has its own unique serial number etched into the body and is supplied with its own individual certificate of calibration, as a guarantee of the unit's quality.

Single channel

omniPETTE's pipetting mechanism allows precise and effortless setting of pipette volume. Winding the counter from min to max volume can be performed rapidly with one hand.

Height adapters

Using a series of height adapters, the tip ejector position on the shaft is adjustable to allow the pipette's use with virtually all brands of tips.

Eight models of single channel omniPETTE cover all volumes from 0.1µl up to 10ml.



Multi channel

omniPETTE Multi-Channel Pipettes are available in 8 and 12 channel models. Four overlapping volume ranges are provided to precisely meet liquid handling requirements from 0.5 to 300µl. The performance of every pipette is checked by gravimetric method and the results of test are printed in pipette Quality Control Certificate.

For comfortable pipetting in any direction, the tip manifold rotates 360°

Suspension system

Each model features a revolutionary suspension system which allows the shafts to move independently and so retract slightly when they are pressed against a row of pipette tips. This ensures that all tips are secured on their individual shaft with the minimum of effort - and never fall off! In addition, an innovative ejector bar is curved, allowing the tips to be pushed off in steps, therefore reducing the amount of force required for ejection.

Individual piston assembly

Each channel of the pipette has an individual, precision piston assembly to ensure accuracy and reproducibility from one pipetting series to the next, as well as between channels. The micrometer is continuously adjustable for selection of whole or fractional volumes.

SIN	SINGLE CHANNEL PIPETTES									
	Cat. No.	Volume Range	Accuracy % (Coeff. Variation %	Cat. No.	Volume Range	Accuracy %	Coeff. Variation %		
CV	2	0.2 to 2µl	±12 to 1.5	±6.0 to 0.7	CV200	20 to 200μl	±1.2 to 0.6	±0.6 to 0.2		
CV.	10	0.5 to 10µl	±4.0 to 0.5	±2.8 to 0.4	CV1000	100 to 1000µl	±1.6 to 0.6	±0.4 to 0.15		
CV	20	2 to 20µl	±3.0 to 0.8	±1.5 to 0.3	CV5000	1 to 5ml	±0.6 to 0.5	v0.25 to 0.15		
CV:	50	5 to 50μl	±2.5 to 0.8	±2.0 to 0.4	CV10000	1 to 10ml	±2.5 to 0.5	±0.6 to 0.2		
CV	100	10 to 100µl	±1.6 to 0.8	±0.8 to 0.2						

Multi Channel Pipettes									
Cat. No.	Channels	Volume Range	Accuracy %	Coeff. Variation %	Cat. No.	Channels	Volume Range	Accuracy %	Coeff. Variation %
CV8-10	8	0.5 to 10µl	±10.0 to 2.0	±8.0 to 1.2	CV12-10	12	0.5 to 10µl	±10.0 to 2.0	±8.0 to 1.2
CV8-50	8	5 to 50µl	±4.0 to 1.6	±2.5 to 0.6	CV12-50	12	5 to 50μl	±4.0 to 1.6	±2.5 to 0.6
CV8-200	8	20 to 200µl	±3.0 to 1.0	±1.5 to 0.6	CV12-200	12	20 to 200µl	±3.0 to 1.0	±1.5 to 0.6
CV8-300	8	50 to 300µl	±1.6 to 1.0	±1.5 to 0.6	CV12-300	12	50 to 300µl	±1.6 to 1.0	±1.5 to 0.6
Cat. No.		Description			Cat. No.		Description		
CV-MS		Pipette Stand, 3-position			CV-1POS	CV-1POS Pipette Stand, 1 Position for Single or Multi Channel Pipette			i Channel Pipettes
CV-RS		Rotating Pipette Stand, 6-position			CV-4POS		Pipette Stand, 4 Position for Single Channel Pipettes		







quickspin microcentrifuge

Quickspin is perfect for microfiltration and rapid spin-down of sample from the walls and caps of microcentrifuge tubes.

Occupying less than 6 inches square of bench space, the Quickspin has a very small footprint, making it easy to use in the lab. Rotors and adaptors, are supplied as standard to accommodate 1.5 ml, 0.5 ml and 0.4 ml tubes, as well as 0.2 ml strips and tubes. A highly durable stainless steel hinge pin facilitates easy opening of the translucent lid, while an on/off switch is located on the side of the centrifuge to start and stop operation.

Alternatively, with the switch in the 'on' position, the centrifuge can be started and stopped by closing and opening the lid.

n, the centrifuge can be started

KFY FFATURES

- COMBI-Rotor for tubes and strips
- Twice the capacity of traditional mini centrifuges
- Nearly silent operation
- Starts and stops with opening/closing of the lid

TECHNICAL SPE	CIFICATIONS
Maximum speed	6000rpm
Maximum G Force	2,000 x g
Capacity	6 x 1.5/2.0 ml 2 x 0.2ml Strips
Dimensions (WxDxH)	15 x 15 x 11.7 cm
Weight	0.45 kg

multifuge minicentrifuge

Unlike traditional mini centrifuges, the multiFuge eliminates the need to change rotors when switching between microtubes and PCR strips.

The included, unique COMBI-Rotor is all that is required for running 12 microtubes and 4 PCR strips simultaneously.

With a fixed speed that produces 2,000 x g, this centrifuge is perfect for quick spin downs. Simply close the lid and the unit quickly ramps up to 5500 rpm. Open the lid, and the rotor quickly decelerates for removal of samples.

At just 14cm wide and less than 11cm high, the multiFuge truly is a personal centrifuge with unmatched capacity and flexibility.



Unique COMBI-Rotor



Compact, low profile design

KEY FEATURES

- COMBI-Rotor for tubes and strips
- Twice the capacity of traditional mini centrifuges
- Nearly silent operation
- Starts and stops with opening/closing of the lid

TECHNICAL SPECIFICATIONS		
Speed:	5,500 rpm / 2,000 x g	
Capacity:	12 x 1.5 / 2.0 ml tubes, 32 x 0.2 ml PCR tubes, 4 x PCR strips (8x0.2 ml)	
Dimensions:	14 x 20 x 11.2 cm	
Weight:	5 kg	

ORDERING INFO	DRMATION		
CSLQSPIN*	Mini Centrifuge complete with 1.5/2.0 ml rotor, strip tube rotor, 0.5 and 0.4	4 ml adapters, 230V	
CSL-MultiFUGE*	MultiFUGE with DuoROTOR for microtubes, 110-240V	MF-A0.6-6	Adapters, 0.5 ml, pack of 6
* For 110V units, ad	d \$ to order code	MF-AO 2-6	Adapters 0.2 ml pack of 6



multispin refrigerated centrifuge

Built for long life, multiSPIN benchtop centrifuges have strong construction yet, offer a sleek contemporary design that will fit into any modern laboratory.

multiSPIN is packed full of features to make researchers' centrifugation procedures that little bit simpler. Its bright blue LED display ensures that run parameters are easily read from anywhere in the lab. Four different rotors provide exceptional flexibility, allowing its use with PCR/microcentrifuge tubes of 0.2ml, 0.4ml, 0.5ml, 1.5ml, 2.0ml, 2.2ml capacity; Haematocrit Capillary as well as popular 15ml and 50ml centrifuge tubes. The unit's rotor recognition provides safe selection of rotors.

Utilising a high quality brushless motor and its proprietory air-flow design, multiSPIN is quiet (<60db), cool & reliable. Its rust-free stainless steel bowl is extra thick and easy to clean. The unit features flexible programming including 10 acceleration rates & 10 deceleration rates plus a Timer 0-99 minutes & Hold in 30 second increments. Its 10 program memory allows multiple users to set up and easily access their individual run parameters. Speed can be accurately set in rpm or rcf (G) in 10 rpm increments, while a Pulse feature enables short runs for fast pelleting.



KEY FEATURES

- Multiple rotors offers greater flexibility one centrifuge for multiple tube sizes
- 0.2, 0.4, 0.5, 1.5, 2.0, 2.2ml & PCR strips
- Haematocrit capillary and 2.0ml tubes
- Fixed angle 15 & 50ml tubes
- Swing out 8 to 15ml tubes
- Extremely quiet <60db (rotor dependent)
- Proprietory air-flow design for cooler running
- Rotor recognition for safe selection
- Multi point lid locking for complete lid safety
- 3 year warranty as standard

 no compromise on component quality,
 reliability is guaranteed



Hi-visibility display and intuitive parameter entry

TECHNICAL	SPECIFICATIONS
Speed	500-15,000 Rpm (10 Rpm steps)
Rcf Max	22,000 G
Timer	0-99 Mins & Hold (30 sec steps)
Dimensions	315 x 450 x 635mm (HxWxD)
Weight	62 Kg (without rotor)
Power	690 Watts
Memory	10 programs
Accel rates	10 programs
Decel rates	10 programs
Temp PID Cont	-9°C to + 40°C rolled to 121°C



Ordering Information		
CR2000R multiSPIN Refrigerated Bench-Top Centrifuge (230V 50Hz), without rotor	BRK5424	24 x 2ml Rotor
CR2000R\$ multiSPIN Refrigerated Bench-Top Centrifuge (110V 60Hz), without rotor	BRK5436	36 x 0.5ml Rotor
CR200OR-24 multiSPIN Refrigerated Bench-Top Centrifuge (230V 50Hz) with 24 place rotor	BRK5448	4 x PCR strips
CR2000R-24\$ multiSPIN Refrigerated Bench-Top Centrifuge (110V 60Hz) with 24 place rotor	BRK5494	24 x 2ml Rotor
Other variations available - just select the centrifuge and required rotor	BRK5508M	8 x 10ml swing out rotor
	RS04	0.2-0.4ml Reducer, Pack of 24
	RS05	0.5ml Reducer, Pack of 24



CUBE digital dry baths

CUBE digital dry baths are available in single and dual block models, and have a comprehensive range of interchangeable blocks.


Each digital dry bath is compact and easy-to-use. The quick-change blocks have rapid heat-up times and reproducible temperature uniformity and accuracy, and may be used in a variety of applications, which include: restriction digestion, coagulation studies, hybridisation, Hot Start PCR® reactions and DNA denaturation. Due to the Solid Aluminium block holder, each Cube dry bath may also be adapted as a mini water bath incubator if desired. Both dry baths incorporate a digital microprocessor controller for accurate temperature control in 0.1°C increments from ambient +5°C to 150°C. Rapid and easy programming is facilitated by the easy to use arrow keys on the sloped front panel, while both the

temperature and running time are shown simultaneously on the dual digital LCD display.

KEY FEATURES

- Microprocessor control with digital performance for precise, accurate control
- Wide temperature control range with excellent uniformity
- Rapid temperature increase rate
- LCD screen showing timer and temperature simultaneously
- User temperature calibration

TECHNICAL SPEC	IFICAT	IONS	
Cat. No.		DB-01	TCDB-02
Number of blocks		1	2
Display		LCD Display	
Heating Power	1	25W	200W
Dimensions, mm (W x L x H)	15x15	x13.5 mm	15x23x13.5
Controller	[Digital Micro	oprocessor
Heating Chamber	N	Nolded alum cham	ninium alloy nber
Temperature Range	5°C	above amb	pient to 150°C
Temperature Increme	ent	0.1	°C
Temp. Uniformity at 37°C		C within 0.2°C	
Temp. Accuracy at 37	7°C	within	0.2°C
Temp. Calibration		Ye	S
Timer	l	Jp to 99(hr) contin):59(min), luous
Safety	Ove	k proof hea r temperati SSR failure	ting chamber ure protection detection
Operating Temp.		Ambient	to 40°C
ORDERING INFOR	MATIC	ON	

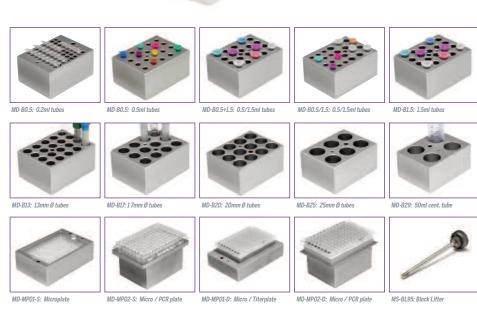

OKDEKINO	Ordering Information				
SINGLE BLOC	K	DUAL BLOCK			
TCDB-01*	The Cube Dry Bath Incubator (one block unit); without block 220V	TCDB-02*	The Cube Dry Bath Incubator (dual block unit); without block 220V		
Accessories					
MD-MP01-S	Block for Microplate; Titerplate Plain Block for Single Block Unit Only	MD-B0.5	Block for 0.5 ml tube, 20 wells		
MD-MP02-S	Block for 96 wells deep Microplate or PCR plate for Single Block Unit Only	MD-B1.5	Block for 1.5 ml tube, 20 wells		
MD-MP01-D	Block for Microplate; Titerplate Plain Block for Dual Block Unit Only	MD-B13	Block well size 13 mm, 20 wells		
MD-MP02-D	Block for 96 wells deep Microplate or PCR plate for Dual Block Unit Only	MD-B17	Block for 15 ml centrifuge tube, 12 wells		
MD-B0.5/1.5	Double side block: one side for 1.5 or 2.0 ml tube, 20 wells; Opposite side	MD-B20	Block well size 20 mm, 12 wells		
	for 0.5 ml tube, 30 wells	MD-B25	Block well size 25 mm, 6 wells		
MD-B0.5PLUS	i1.5 Combination block: for 0.5 ml tube, 12 wells and for 1.5 or 2.0 ml tube,	MD-B29	Block for 50 ml centrifuge tube, 4 wells		
	12 wells (on the same side)				
MD-B0.2	Block for 0.2 ml tube, 64 wells or for 0.2 ml PCR strip tubes for 8 wells x 8	* For 110V unit	s, add \$ to order code		



microBLOCK

Benchtop control of sample temperature has never been this easy or economical.

The microBlock fits almost anywhere and can even be used "on-the-go" in cars, boats or wherever a 12 volt power source is available. Its simple touch pad control with digital display is designed for "set and walk away" temperature selection and unrivaled accuracy. At less than 10.5cm. wide, microBlock is truly the first personal block incubator.

KEY FEATURES

- Compact, fits in the palm of your hand
- Exchangeable blocks, for 0.2 to 50 ml tubes
- Digital temperature control
- Clear cover improves temperature uniformity





MD-MINI-B05



MD-MINI-B07







MD-MINI-B03

TECHNICAL SPECIFICAT	IONS
Temperature Range:	Ambient +5 to 100°C
Temperature Accuracy:	ffl 0.25°C
Temperature Increments:	0.1°C
Temperature Uniformity:	ffl 0.2°C
Dimensions:	13 x 15 x 10 cm
Weight	600 g

stirring water baths

A powerful magnetic stirring mechanism combined with high wattage heating allows each stirring water bath to maintain temperatures to a maximum 99°C

Available in 10 and 20 litre bath capacities, these water baths comprise as many as 3 stirrers for a maximum stirring speed of 1500rpm. Each bath includes a highly visible front-panel LCD, reproducible microprocessor control of temperature within 0.1°C increments, a corrosion resistant stainless steel interior and automatic alarm and safety shutdown mechanism.



KEY FEATURES

Powerful magnetic stirring mechanism

TECHNICAL SPECIFICATIONS

- Stirring speed up to 1500rpm
- Available in 10 and 20 litre
- Reproducible temperature control within 0.1°C

TECHNICAL SPECIFICATIONS				
SWB-	10L-1	10L-2	20L-1	20L-3
Stirrers	1	2	1	3
Capacity (approx.)	10 L	10 L	20 L	20 L
Internal Dimensions	24x30x15cm 30x50x15cm		x15cm	
Temperature	5°C above ambient to 99°C			
Heating Power	600 W 800 W			
Stirring Speed	400 - 1500 rpm			
Timer	up to 99 hr 59min, continuous			
Temperature	0.1°C			
Safety	warning indicator on screen, with alarm and automatic shut down			

ORDERING I	Ordering Information			
MBDB-01*	microBlock Digital Dry Bath with block lifter (Blocks sold separately)	MD-MINI-B04	Block, for 50ml tubes, 2 wells, 29.2mm, depth 72mm	
MD-MINI-B01	Block, for 0.2ml tubes (PCR Strip Tube), 32 wells, 6.35mm, depth 19mm	MD-MINI-B05	Block, for 0.5ml tubes, 12 wells, 8.0mm, depth 25mm	
MD-MINI-B02	Block, for 1.5ml tubes, 12 wells, 10.8mm, depth 28.5mm	MD-MINI-B06	Block, for 2.0ml or 1.5ml tubes, 12 wells, 11.0mm, depth 30mm	
MD-MINI-B03	Block, for 15ml tubes, 6 wells, 17.3mm, depth 70mm	MD-MINI-B07	Block, for 1.5ml tubes, 12 wells, 10.9mm, depth 30mm	
SWB-10L-1*	Stirring Water Bath 10L with 1 built-in stirrer, includes lid	SWB-20L-1*	Stirring Water Bath 20L with 1 built-in stirrer, includes lid	
SWB-10L-2*	Stirring Water Bath 10L with 2 built-in stirrers, includes lid	SWB-20L-3*	Stirring Water Bath 20L with 3 built-in stirrers, includes lid	
SWB-LID10	Transparent lid for 10L stirring water bath	SWB-LID20	Transparent lid for 20L stirring water bath	
* For 110V units	s, add \$ to order code			



Peristaltic Pumps

This versatile peristaltic pump is an ideal accessory for gradient gel formation with the VS20-DGGE.

The easy-to-use pump head design accomadates several different silicon tubing sizes. This provides a great flexibility for a wide range of flow rates to be utilised when connecting with different sizes of tubings. Pump speed is adjustable up to maximum of 300 RPM, making it ideal for a wide range of applications, which include filtration, circulation, sampling, chemical spraying, dispensing, transferring, feeding and filling.



ORDERING	Information		
MU-D01	Single Peristaltic Pump	MU-S17	Silicon tube I.D. 1/4", 25 ft
MU-S13	Silicon tube I.D. 1/32", 25 ft	MU-S18	Silicon tube I.D. 3/8", 25 ft
MU-S14	Silicon tube I.D. 1/16", 25 ft	MU-S25	Silicon tube I.D. ³ / ₁₆ ", 25 ft
MU-S16	Silicon tube L.D. 1/8", 25 ft		

TECHNICAL SPECIFICATIONS	
No. of Heads	1
Max. RPM:	300
Flow Rate, : ml/min	1.2-1140
Dimensions: (h x l x w)	20x34x13
Weight, kg:	5.7

Personal thermal cycler

The PTC25 is designed with Hot Start PCR reactions hot start PCR reactions in mind, with a wide range of programming features.

Flexible program editing, which allows researchers to set up an amplification program containing different temperature ramping conditions within individual loops allows efficient protocol development. The PTC25 also offers the flexibility to create an advanced amplification program which can increase/decrease temperatures and hold times for an assigned step from cycle to cycle. The cycler even features a RT program function, it's simple and convenient to run one-step RT by combining the RT program with a stored amplification reaction.







KEY FEATURES

- Microprocessor control with digital
- Wide temperature control range and great temperature controlled performance
- LCD display
- Self pressure adjusting heating lid
- User friendly and powerful program performance
- RT program
- Link up to 5 loops for one program
- Up to 9 steps for each loop
- Up to 99 cycles for each program

Sample Capacity	25 (5 x 5) x 0.2ml tube
Temperature Control Range	4°C to 110°C
Lid Temperature Control Range	ambient +5°C to 110°C
Block Homogeneity	20°C to 72°C < + 0.3°C
Control Accuracy	+0.2°C
Heating Rate	approx. 3°C / s
Cooling Rate	approx. 2°C / s
Display	2.6" LCD
Program	Reverse transcription program
	Link program: multi-loop available; up to 5
	Step per Loop: up to 9
	Cycle number: up to 99
	Program storage: up to 100
	Increment and decrement temperature per step on each cycle
Increment And Decrement Time Per Step On Each Cycle	Yes
Rated Voltages	110 V / 220 V selectable
Unit Dimension (W x L x H)	7.87" x 12.62" x 7.48" (200 x 320.5 x 190 mm)
Unit Weight	Approx. 18.9 lb (8.6 kg)
Stackable	Yes

ORDERING INFORMATION



GTC96S thermal cycler

The GTC96S advanced thermal cycler delivers exceptional performance at an affordable price. A unique protocol optimisation process utilises Flexible Temperature technology to segregate the 96-well plate into six discrete (4×4-well) temperature zones, made easily distinguishable by blue and black squares.

Temperature selection is no longer automated and is entirely in the hands of the operator over a 24°C range, anywhere between 4 and 96°C. This enables the operator to optimise PCR by testing 6 different temperatures simultaneously in just one thermal cycler run. With heating and cooling rates of 5°C/s and 3.5°C/s respectively, the precision temperature control of the GTC96S minimises temperature overshooting and undershooting between individual stages within each PCR cycle, resulting in faster run times and greater efficiency.

Programming is both quick and simple through a large user-friendly interface, while pre-programmed methods make set-up obvious even to first time users. A heated lid, which is fully adjustable to apply optimal pressure to 0.2ml tubes and microplates, may be programmed to hold different temperatures between 60 to 65°C or 100 to 115°C.



T₁



Simplified Workflow – Improved Throughput GTC96

may be programmed to operate between one and six different annealing temperatures of user choice, across the block.

- Improved Throughput by reducing time
- Simplified Workflow by reducing steps

Figure 1. Primers designed to anneal to various genes (e.g. Gene A. B. and C) typically have different annealing temperatures (T,T₂ and T₃) To simplify workflow and increase throughput the GTC96 can perform up to six different reactions, significantly reducing steps and time

KEY FEATURES

- Compatible with 96-well plates, 0.2ml tubes and tube strips
- Protocol optimization selectable from 1 to 24°C across the entire temperature control range from 4-99°C
- Precision temperature control increases both speed and efficiency

Intuitive User Interface

GTC96 utilises an intuitive user interface. This user interface is friendly to the laboratory environment. It can be used with lab gloves even if wet. The ramping speed and eliminated overshooting and undershooting which contributes to longer run times, have been improved.



Technical Specifications	
Sample Capacity	1x 96-well plate; 12x 8x0.2ml strip tubes; 96 x 0.2ml tubes
Programmable Temperature Range	4-99.9°C
Temperature Control	Calculated or block
Temperature Accuracy / Uniformity	± 0.5 °C/ ± 0.5 °C
Heating / Cooling Method	Peltier
Maximum Heating / Cooling Rate	5°C / 3.5°C per second
Temperature Range of 6-Segment Blocks	30-99°C; temperature of each segment may be set independently
Maximum Temperature Difference Between 6-Segment Blocks	24°C
6-Segment Temperature Block Format	6 segments, each 4x4-well
Programmable Lid Temperature	60-65°C, 90-94°C
Memory	200 complete programmes
Temperature Increments / Decrements	Yes
Time Increments / Decrements	Yes

Ordering In	FORMATION		
GTC96S	GTC96S thermal cycler with 96-well block, 240VAC	CSL-CLEANCAB	Complete PCR package with low cost clean room. Includes
GTC96S\$	GTC96S thermal cycler with 96-well block, 120VAC		CSL-GTC96S, CSL-UVCAB, CV2, CV20, CV200, CV1000 and CV8-200
CSL-PCRKIT	PCR package includes GTC96S thermal cycler, MSMIDI96 96-well		pipettes, MSMID196 and nanoPAC-500
	electrophoresis unit and nanoPAC-500 power supply	CSL-CLEANCAB\$	As CSL-CLEANCAB but 120VAC version
CSL-PCRKIT\$	As CSL-PCRKIT but 120VAC version		

akralab

KEY FEATURES

Complete with four powerful, timer

controlled UV bulbs

complete work surface

Suitable for work with 32P

minutes

PCR cabinets

These UV Sterilisation Cabinets provide a convenient area for setting up PCR reactions in a nucleic acid free environment thus limiting PCR reaction contamination.

Acting effectively as a low-cost alternative to a clean room, the powerful UV lights on each cabinet denature nucleic acids in 5 to 30 minutes making them unsuitable for amplification. The cabinets incorporate safety features to prevent user-exposure to UV light. The UV lights are timer controlled and there are safety switches on the cabinet doors which power off the UV lights when opened. The units' white light provides excellent visibility when working within the cabinet. Constructed from 10mm acrylic, the cabinets also act as efficient shields from beta radiation emissions and can therefore be safely used with isotopes such as ³²P.




Shown without SpillTray



Two models are available, Maxi as shown above, and a new Mini Cabinet for limited budget and bench space. Safety SpillTrays and Liners of size 68 x 54cm, provide convenient containment of spillage (not included with cabinet)

TECHNICAL SPECIFICATIONS UV LIGHTS Maxi Four x 15 Watt MINI FOUR X 15 WATT MAXI 15 WATT WHITE LIGHT 15 Watt MINI Maxi 770 x 560 x 420mm DIMENSIONS (HxWxD) MINI 510 х 560 х 350мм WEIGHT Maxi 19 Kg 12 Kg

GloveBoxes



Available in four sizes, these glove boxes are for procedures requiring exclusion of atmospheric oxygen and moisture. Manufactured in robust non-reactive polycarbonate, Cleaver Scientific GloveBoxes can be used with inert gases such as helium, nitrogen and argon. Including hermetically-sealed gloves, for optimum user manoeuvrability and dexterity when handling equipment, samples and packages, and a side panel as standard, each box provides a safe barrier between the worker and any potential contaminant. GloveBoxes may also be supplied with airlocks, and are customisable in various shapes and sizes to suit different work environments, applications and spaces. Shelving and pipette holder options are also available. A CombiBox option combines the benefit of UV sterilisation with the fully sealed and enclosed area of a glove box. Four 15W UV-C bulbs with safety interlock switching may be timer controlled for up to 30 minutes, or indefinitely, to decontaminate equipment and the work surface, before and after use. A 15W white light bulb illuminates the entire work surface to provide excellent visibility.

KEY FEATURES

- Available in 4 sizes, with or without air locks
- Provides a barrier between the user and potential contaminants
- Hermetically sealed gloves allow safe handling within a fully enclosed containment area
- Side panel allows samples and packages to be placed in and removed from the work area safely and easily


ORDERING I	Ordering Information					
CSL-UVCAB	UV PCR Cabinet, Maxi (without Safety SpillTray)	CSR-TW4	Safety SpillTray, White			
CSL-UVCABM	INI UV PCR Cabinet, Mini (without Safety Spill Tray)	CSR-TY4	Safety SpillTray, Yellow			
CSL-UVTUBE	Replacement UV Fluorescent Tube	CSR-TL4	Safety Tray Liners, APET, pk/25			
CSL-WHTUBE	Replacement White Fluorescent Tube					
CSL-GB24	Glove Box, Standard 2 port, 60 x 60 x 60 cm	CSL-GB48	Glove Box, Standard 2 port, 120 x 60 x 60cm			
CSL-GB24A	GB24 with Air-Lock	CSL-GB48A	GB48 with Air-Lock			
CSL-GB36	Glove Box, standard 2 port, 90 x 60 x 60cm	CSL-GB60	Glove Box, standard 2 port, 150 x 60 x 60 cm			
CSL-GB36A	GB36 with Air-Lock	CSL-GB60A	GB60 with Air-Lock			

For 110 V AC, please add '-\$' as a suffix to the appropriate product code



Teaching Products

Cleaver Scientific offers a wide range of teaching equipment and kits, available in convenient packages as well as individually. We offer complete experimental set ups for classrooms to introduce our future young scientists to genotyping, genetics diseases, inherited traits and electrophoresis. Our teaching range includes:




Teaching specific gel tanks with enhanced safety features

Power supplies for running multiple experiments with simple interfaces

Story based DNA and Dye Electrophoresis kits for teaching the principles of electrophoresis and genetics



General laboratory equipment and reagents, everything you need to get a teaching lab running







radiation safety


Available in standard 10mm beta-protecting acrylic, 12mm gamma-attenuating lead acrylic and also as duo shielding for protection against both types of emission, this comprehensive range of Radiation Safety Products comprises a large selection of shields, boxes, waste bins, trays, plus assorted accessories and cabinets.


Shields

Supplied in small, medium and large sizes and with curved base 15cm-deep for use with safety trays or flat 30x30cm base for under-the-bench protection. A range of angles offers increased manoeuvrability, while clear optical acrylic aids visualisation.



Cleaver Scientific cabinets provide a convenient area to carry out work with beta and gamma emitting isotopes with complete all round protection. Each cabinet's 49 x 55 x 37cm dimensions offer a large working area without impeding vision, either in a standing or seated position.

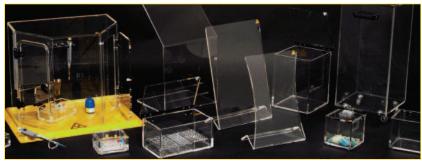

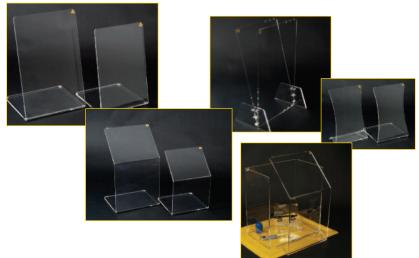

AND LINERS

Available in general purpose, biohazard and radiation safety formats, spilltrays provide a re-usable work area with the added benefit of safe containment of spillages and lab bench protection. All trays supplied with one free liner when purchased. Additional environmentally friendly APET liners provided in packs of 25.



ORDERING	INFORMATION	
BETA	GAMMA	
CSR-CSR-S1	CSR-S1G	Small Fixed 15° Angle , Flat Base 30 x 45cm, Base 30 x 30cm
CSR-S1T	CSR-S1TG	Small Fixed 15° Angle, Curved Base 30 x 45cm
CSR-S2	CSR-S2G	Large Fixed 15° Angle , Flat Base 35 x 53cm, Base 35 x 30cm
CSR-S2T	CSR-S2TG	Large Fixed 15° Angle, Curved Base 35 x 53cm
CSR-S10	CSR-S10G	Small Fixed 45° Angle , Flat Base 30 x 45cm, Base 30 x 30cm
CSR-S10T	CSR-S10TG	Small Fixed 45° Angle, Curved Base 30 x 45cm
CSR-S20	CSR-S2OG	Large Fixed 45° Angle , Flat Base 35 x 60cm, Base 30 x 30cm
CSR-S20T	CSR-S20TG	Large Fixed 45° Angle, Curved Base 35 x 60cm

	BETA	GAMMA	
(CSR-S3	CSR-S3G	3-Sided Shield , Front 46 x 50cm, Sides 30 x 50cm
(CSR-S4	CSR-S4G	Hourglass Shield , Flat Base 30 x 45cm, Base 30 x 30cm
-	CSR-S4T	CSR-S4TG	Hourglass Shield, Curved Base 30 x 45cm
-	CSR-SFLEXI	CSR-SFLEXIG	Shield, Adjustable , 35 x 54 or 54 x 35cm
	CSR-SF	CSR-SFG	Base Plate, 45 x 41cm
	-	CSR-SDUO	DuoShield , Curved Base, Beta/Gamma 30 x 45cm
	-	CSR-SFLEXITG	Shield, Adjustable , 35 x 54 or 54 x 35cm, 35mm thick
	CAB	CABG	Beta Work Cabinet, 49 x 55 x 37cm

Tray Size	Radiation Hazard Tray, Yellow	BioHazard Tray, White	General Purpose Tray, White	APET liners, pk 25
46 x 26cm	CSR-TY1	CSR-TO1	CSR-TW1	CSR-TL1
54 x 34cm	CSR-TY2	CSR-TO2	CSR-TW2	CSR-TL2
57 x 54cm	CSR-TY3	CSR-TO3	CSR-TW3	CSR-TL3
68 x 54cm	CSR-TY4	CSR-TO4	CSR-TW4	CSR-TL4
70 x 46cm	CSR-TY5	CSR-TO5	CSR-TW5	CSR-TL5
113 x 54cm	CSR-TY6	CSR-TO6	CSR-TW6	CSR-TL6



AND WASTE BINS

Biocom storage boxes are manufactured with hinged lids and accommodate interchangeable inserts that hold microtubes, centrifuge tubes, scintillation vials, universals, cryotubes and falcon tubes. Also supplied is our range of floor-standing and benchtop bins with anti-slip feet and hinged lids. These serve as an ideal solution for short-term storage of radioactive waste or radioisotopes. Both the Beta and Gamma storage bins are available in five sizes, while the two largest bin models have wheels for easy transportation. Optional heavy duty drawstring bags may also be purchased.










Accessories

Other accessories available include pipette guards, radiation tape and warning signs and labels.





Opposition I	TO DATE OF THE PARTY OF THE PAR				
Ordering II	GAMMA		BETA	GAMMA	
CSR-B0.4	CSR-B0.4G	MiniBox , 5.5 x 8.5 x 8.5cm	CSR-BDUO	CSR-BDUOG	Duo Box . 7 x 10 x6cm
CSR-B0.4	CSR-B0.4G	MidiBox. 6 x 16.5 x 8.5cm	CSR-BLOCK	CSR-BLOCKG	Block for 4 x 1.5ml Eppendorf tubes, 5 x 3.5 x 14cm
CSR-B6.5	CSR-B6.5G	MaxiBox, 14 x 28 x 16.5cm	CSR-BLOCKL	CSR-BLOCKLG	Cover for B4 . 1 x 3.5 x 14cm
CSR-B3.5	CSR-B3.5G	Box for four way racks, 14 x 17.5 x 15cm	CSR-STORE	CSR-STOREG	Beta-Storage/Transport Block, 7 x 15 x 12cm
CSR-B8	CSR-B8G	Transport Box, 7.5 x 29.5 x 38cm	CSR-COV	CSR-COVG	Carboy Cover, 59 x 38 x 38cm
CSR-R1.5		Mini Box Insert. 16 x 1.5ml tubes	CSR-R20		Maxi Box Insert. 8 x 20ml Scintillation vials
CSR-R50		Maxi Box Insert, 8 x 50ml Centrifuge tubes	CSR-RDUO		Midi Box Insert. 16 x 1.5 and 16 x 0.5ml tubes
CSR-R0.5		Mini Box Insert, 20 x 0.5ml tubes	CSR-R5		Maxi Box Insert, 15 x 5ml Scintillation vials
CSR-R3F		Maxi Box Insert, 3 x Falcon tubes, 8 x 1.5ml tubes	CSR-R2		Midi Box Insert, 32 x 2ml Cryotubes
CSR-R1.5L		Midi Box Insert, 32 x 1.5ml Eppendorf tubes	CSR-RU		Maxi Box Insert, 8 x Universals
CSR-R2F		Maxi Box Insert, 2 x Falcon tubes, 8 x 1.5ml tubes	CSR-R15		Maxi Box Insert, 15 x 15ml Centrifuge tubes
CSR-R0.5L		Midi Box Insert, 40 x 0.5ml Eppendorf tubes			<u>_</u>
BETA	GAMMA		BETA	GAMMA	
CSR-B1	CSR-B1G	1L, use with Bag BAG1, 13 x 10 x 8cm	CSR-B5TIP	-	Large 5L, use with Bag BAG2, 33 x 13 x 13cm
CSR-B2TIP	CSR-B2TIPG	2L , use with Bag BAG1, 13 x 13x 13cm	CSR-B20	CSR-B20G	20L , use with Bag BAG5, 38 x 21.5 x 23.5cm
CSR-B2MCTIP	CSR-B2MCTIPG	2L , use with Bag BAG1, 13 x 13x 13cm	CSR-B53	CSR-B53G	53L , use with Bag BAG, 5 40 x 49 x 27cm
CSR-B3	CSR-B3G	3.3L , use with Bag BAG1, 15 x 15 x 15cm	CSR-B47	-	47L , with Wheels, use with bag BAG6 58 x 28.5 x 27c
CSR-B10	CSR-B10G	10L , use with Bag BAG2, 25 x 20 x 20cm	CSR-B122	-	122L, with Wheels, use with bag BAG6 74 x 41 x 41cm
CSR-B15	CSR-B15G	15L , use with Bag BAG2, 29.5 x 21.5 x 23.5cm			
BETA	GAMMA				
CSR-PB2	CSR-PB2G	Pipette Shield, Biohit PS1000 Beta	CSR-LABS		Radiation Labels, pk/25 25x25mm
CSR-PB1	CSR-PB1G	Pipette Shield, Biohit PS200 Beta	CSR-LABL		Radiation Labels, pk/25 50x50mm
CSR-PB3	CSR-PB3G	Pipette Shield, Biohit PS5000 Beta	CSR-RADTAPE		Radiation Tape, pk/25 25mm x 66m
	CSR-PG3G	Pipette Shield, Gilson P1000 Beta	Various sizes of	fradiation bags ava	ilable. Please check the web site for more details.
CSR-PG3					
	CSR-PG1G	Pipette Shield, Gilson P20/100 Beta			
CSR-PG3 CSR-PG1 CSR-PG2	CSR-PG1G vPG2G	Pipette Shield, Gilson P20/100 Beta Pipette Shield, Gilson P200 Beta			









Contents

 multiSUB horizontal gel systems 	page 6	 gel visualisation 	page 66
runVIEW real-time gel electrophoresis	page 22	• gel drying	page 67
horizontal electrophoresis reagents	page 26	 rockers and shakers 	page 68
omniPAGE vertical gel systems	page 30	mixers, heaters and stirrers	page 69
incl. mini, mini-wide, WAVE maxi		 hybridisation incubators 	page 70
• blotting	page 44	 single and multi channel pipettes 	page 7.
membranes, buffers, stains	page 46	 microcentrifuges 	page 74
COMET assay	page 48	 dry baths and water baths 	page 76
clinical electrophoresis, cellulose acetate	page 50	 peristaltic pump 	page 78
isoelectric focusing and 2D omniPAGE	page 54	thermal cyclers	page 78
Large Format vertical slab gels	page 55	 PCR cabinets / glove boxes 	page 80
omniPAGE-DGGE vertical slab gel systems	page 56	 teaching products overview 	page 8.
power supplies	page 58	 radiation shielding 	page 82
gel documentation & analysis	page 62		

DISTRIBUYE:



Pol. Ind. Las Atalayas Avda. de la Antigua Peseta, 77 03114 Alicante Buzón 20212 atencion.clientes@akralab.es Tel. 902 22 22 75 | +34 965 11 65 21 Fax. 902 15 41 65 | +34 965 11 57 62

www.akralab.es